

ROHS Compliant

MAPX	MODIFICATION	DATE	DRAW	APPROVE

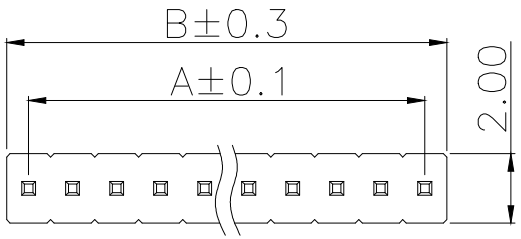

SPECIFICATIONS
Current Rating: 1.0 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Operation Temperature: −40°to+105°
Insrlator Material: Polyester(UL94V−0)
Contact Material: Brass
Standard: PA6T
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for30−60seconds
(260°C for5seconds)


P/N	PIN	DIM.A	DIM.B
PH1.27−01−01PZD	1	0.00	1.27
PH1.27−01−02PZD	2	1.27	2.54
PH1.27−01−03PZD	3	2.54	3.81
PH1.27−01−04PZD	4	3.81	5.08
PH1.27−01−05PZD	5	5.08	6.35
PH1.27−01−06PZD	6	6.35	7.62
PH1.27−01−07PZD	7	7.62	8.89
PH1.27−01−08PZD	8	8.89	10.16
PH1.27−01−09PZD	9	10.16	11.43
.....	.....	.....	.....
PH1.27−01−50PZD	50	(PIN−1)x1.27	(PIN)x1.27

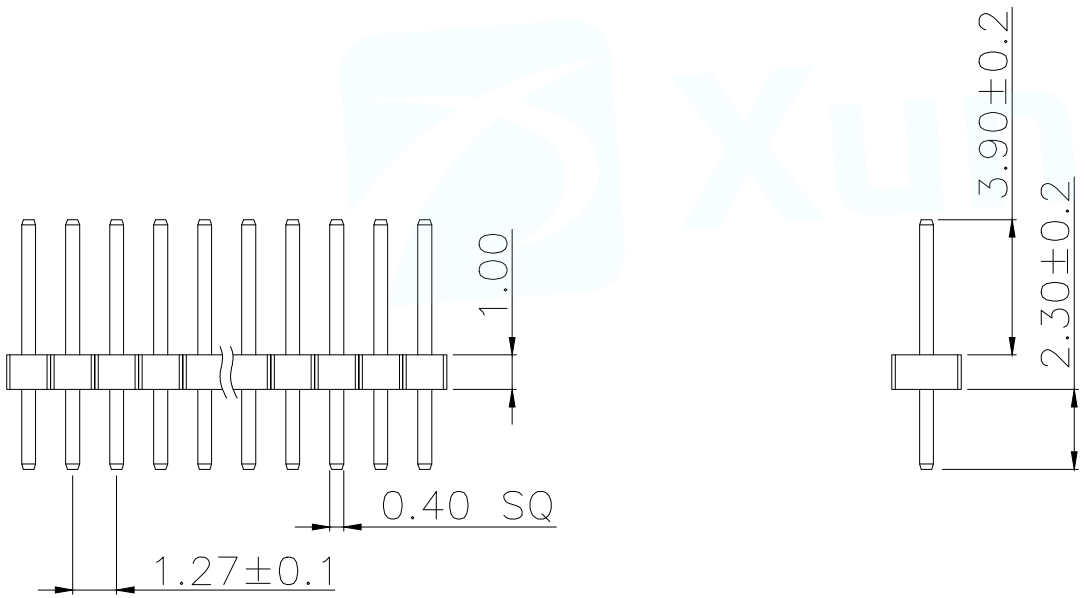

PART NUMBER DESCRIPTION:

PH1.27−01−NPZD

(D＝单排;S＝双排)
(Z＝直脚;W＝弯脚)
(PIN数量;01.....50PIN)
(排针开关)

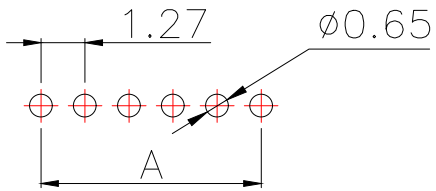

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

MANUFACTURE DWG	东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd			
UNLESS OTHERWISE SPECIFED TOLERANCES		TITLE:1.27PH H1.0 1xnPin 180度 W2.0 PC2.3 PA3.9 PB1.0 L7.2 6T 0.4针		
		PAR	PH1.27−01−NPZD	
DECIMALS:	ANGLES:	DWN		
X.±0.30	X°±5°	CHKD		
X.X±0.20	X.X°±1°	APVD		
X.XX±0.10	X.XX°±0.5°	SCALE N:A	UNIT:MM	
CUSTOMER COPY		SIZE:A4	SHEET:1F1	REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

HDMI-212L WAFER-WBM4.2-16PJK-GB FPC-0.5FX-4PWBH15 FPC-0.5HF-10PWBR-H20
FPC-1.0AX-14PWCR-H25 WAFER-VH3.96-4PLB FPC-0.5AX-24PWCR-H20 FPC-0.5AX-30PWCR-H20
FPC-0.5FX-4PWCR-H20 WAFER-PH2.0-3PWB WAFER-XH2.54-4PWZ-H62 MU-103-ARW64
PHB2.0-02-20PZZ WAFER-PH2.0-6PWB FPC-1.0AX-4PWCR-H25 SMA-KWE-323C-H13X23-LW
WAFER-PH2.0-2PJK FPC-0.5FX-20PWBH15 DC-031A-A100 FPC-0.5FX-14PWCR-H20
WAFER-GH1.25-6PLB WAFER-MX1.25B-8PWB FPC-0.5AL-6PB FPC-0.5AS-5PWCR-H20
FPC-1.0HF-4PWAR-H20 RJ45-005-014-11 TYPEC-304YDSW-ACP16 WAFER-PH2.0-11PZZ
WAFER-PH2.0-8PLB FPC-0.5FX-16PWCR-H20