




CAD FILE:

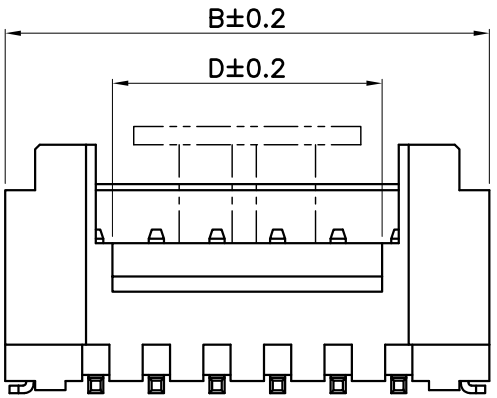

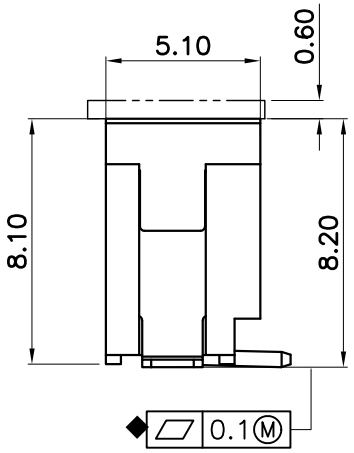


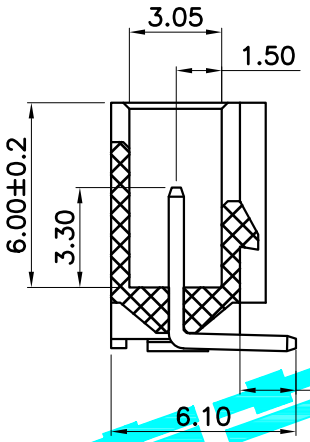

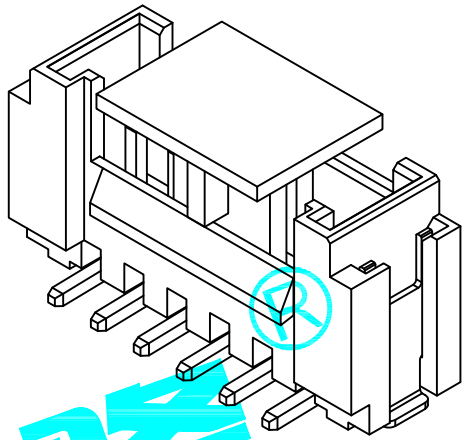



2PIN

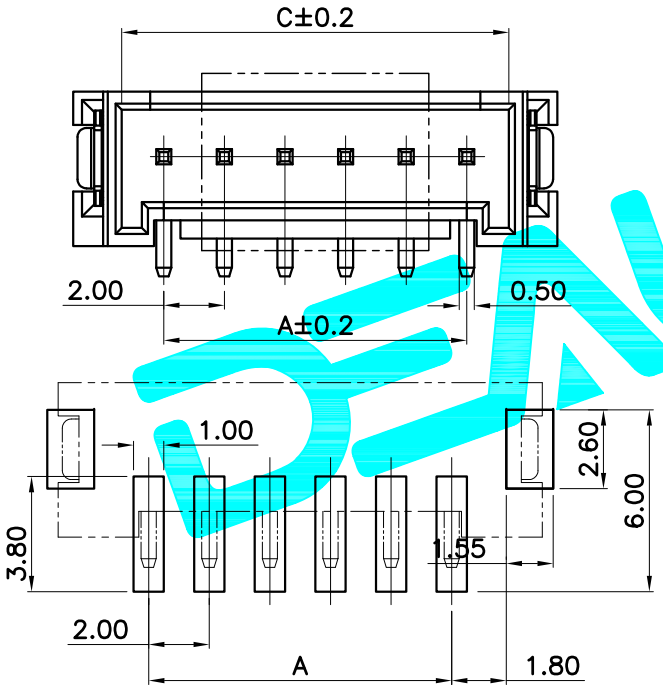

PCB LAYOUT

技术要求Notes:

1.外观质量Appearance quality:
 a.金属表面镀层不能有明显损伤;
  Coating on metal surface can not be damaged obviously;
 b.塑壳表面不能有明显的变形或开裂;
  No obvious deformation or cracking can be observed on the surface of the Housing;
 c. 产品表面应保持清洁;
  Product surface should be kept clean;
2.工作温度 Working temperature：-25℃～+105℃;
3.额定电压 Voltage Rating ： Max 250V [AC(Effective value rms)/DC];
4.额定电流 Current Rating：Max 2A [AC(Effective value rms)/DC];
5.接触电阻 Contact resistance： Max 20 mΩ
6.绝缘电阻 Insulation resistance：Min 1000MΩ;
7.耐压 Withstanding voltage：1000V AC(50 Hz，Effective value：1 min);
8.环保要求应符合RoHS标准
 Environmental requirements should meet RoHS standards.

孔位 CKT NO.	DIM A	DIM B	DIM C	DIM D
16	30.00	36.00	32.80	28.90
15	28.00	34.00	30.80	26.90
14	26.00	32.00	28.80	24.90
13	24.00	30.00	26.80	22.90
12	22.00	28.00	24.80	20.90
11	20.00	26.00	22.80	18.90
10	18.00	24.00	20.80	16.90
9	16.00	22.00	18.80	14.90
8	14.00	20.00	16.80	12.90
7	12.00	18.00	14.80	10.90
6	10.00	16.00	12.80	8.90
5	8.00	14.00	10.80	6.90
4	6.00	12.00	8.80	4.90
3	4.00	10.00	6.80	2.90
2	2.00	8.00	4.80	2.70

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE
DRAWN	G.M.Chen	2015/7/17
CHECKED		
APPROVALS		

TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~ 5 ±0.10; ANGLE ±2°

DEALON德之隆® ELECTRONICS CO.,LTD

TITLE:	CONNECTOR	
PART NO.	L200HY-XXPS	
UNIT: mm	SCALE: 1:1	SHEET 1 OF 1
DRAWING NO.	———	PROJ:

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

DEALON:

1.0-4PWB DW254S-22-04-85 DZ127S-22-06-55 DW254S-22-06-85 PH-2PWB 1.25-4PWB DZ254R-11-04-63 DW254W-11-06-85 USB-TYPE-C-009 XH-2PWB XHB-2A 1.25-3PWB DZ127R-11-06-25 XH-4PS 1.25-4PS 1.25-5PWB DZ254S-11-02-48 DZ254S-11-03-48 USB-TYPE-C-018 XH-4A 1.25-5PS DM254R-11-04-85 DW127R-22-12-23 DZ254R-11-09-63 DZ254S-22-04-75 MK-12C01-G1.5 USB-TYPE-C-019 XH-4PWB 1.25-3PS 1.25-8PWB