Please note that Cypress is an Infineon Technologies Company.
The document following this cover page is marked as “Cypress” document as this is the company that originally developed the product. Please note that Infineon will continue to offer the product to new and existing customers as part of the Infineon product portfolio.

Continuity of document content
The fact that Infineon offers the following product as part of the Infineon product portfolio does not lead to any changes to this document. Future revisions will occur when appropriate, and any changes will be set out on the document history page.

Continuity of ordering part numbers
Infineon continues to support existing part numbers. Please continue to use the ordering part numbers listed in the datasheet for ordering.

CY62147G/CY621472G CY62147GE MoBL®

4-Mbit (256K words × 16-bit) Static RAM with Error-Correcting Code (ECC)

Features

- High speed: 45 ns/55 ns
- Ultra-low standby power
  - Typical standby current: 3.5 µA
  - Maximum standby current: 8.7 µA
- Embedded ECC for single-bit error correction[1, 2]
- Wide voltage range: 1.65 V to 2.2 V, 2.2 V to 3.6 V, and 4.5 V to 5.5 V
- 1.0-V data retention
- TTL-compatible inputs and outputs
- Error indication (ERR) pin to indicate 1-bit error detection and correction
- Pb-free 48-ball VFBGA and 44-pin TSOP II packages

Functional Description

CY62147G and CY62147GE are high-performance CMOS low-power (MoBL) SRAM devices with embedded ECC. Both devices are offered in single and dual chip enable options and in multiple pin configurations. The CY62147GE device includes an ERR pin that signals an error-detection and correction event during a read cycle.

Devices with a single chip enable input are accessed by asserting the chip enable ($\overline{CE}$) input LOW. Dual chip enable devices are accessed by asserting both chip enable inputs – $\overline{CE}_1$ as low and CE_2 as HIGH.

Data writes are performed by asserting the Write Enable ($\overline{WE}$) input LOW, while providing the data on I/O_0 through I/O_{15} and address on A_0 through A_{17} pins. The Byte High Enable ($\overline{BHE}$) and Byte Low Enable ($\overline{BLE}$) inputs control write operations to the upper and lower bytes of the specified memory location. $\overline{BHE}$ controls I/O_8 through I/O_{15} and $\overline{BLE}$ controls I/O_0 through I/O_7.

Data reads are performed by asserting the Output Enable ($\overline{OE}$) input and providing the required address on the address lines. Read data is accessible on the I/O lines (I/O_0 through I/O_{15}). Byte accesses can be performed by asserting the required byte enable signal ($\overline{BHE}$ or $\overline{BLE}$) to read either the upper byte or the lower byte of data from the specified address location.

All I/Os (I/O_0 through I/O_{15}) are placed in a HI-Z state when the device is deselected ($\overline{CE}$ HIGH for a single chip enable device and $\overline{CE}_1$ HIGH/CE_2 LOW for a dual chip enable device), or control signals are de-asserted ($\overline{OE}$, $\overline{BLE}$, $\overline{BHE}$).

The device also has a unique Byte Power down feature, where, if both the Byte Enables ($\overline{BHE}$ and $\overline{BLE}$) are disabled, the devices seamlessly switch to standby mode irrespective of the state of the chip enables, thereby saving power.

On the CY62147GE devices, the detection and correction of a single-bit error in the accessed location is indicated by the assertion of the ERR output (ERR = HIGH)[1]. See the Truth Table – CY62147G/CY62147GE on page 16 for a complete description of read and write modes.


The logic block diagrams are on page 2.

Product Portfolio


Product[3]	Features and Options (see the Pin Configurations section)	Range	V_{CC} Range (V)	Speed (ns)	Power Dissipation			
					Operating I_{CC}, (mA) f = f_{max}		Standby, I_{SB2} (µA)	
					Typ[4]	Max	Typ[4]	Max
CY62147G(E)18	Single or dual Chip Enables Optional ERR pin	Industrial	1.65 V–2.2 V	55	15	20	3.5	10
CY62147G(E)30 CY621472G30			2.2 V–3.6 V	45	15	20	3.5	8.7
CY62147G(E)			4.5 V–5.5 V					

Notes
1. This device does not support automatic write-back on error detection.
2. SER FIT Rate <0.1 FIT/Mb. Refer AN88889 for details.
3. The ERR pin is available only for devices which have ERR option "E" in the ordering code. Refer Ordering Information on page 17.
4. Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at V_{CC} = 1.8 V (for a V_{CC} range of 1.65 V–2.2 V), V_{CC} = 3 V (for V_{CC} range of 2.2 V–3.6 V), and V_{CC} = 5 V (for V_{CC} range of 4.5 V–5.5 V), T_A = 25 °C.

Logic Block Diagram – CY62147G

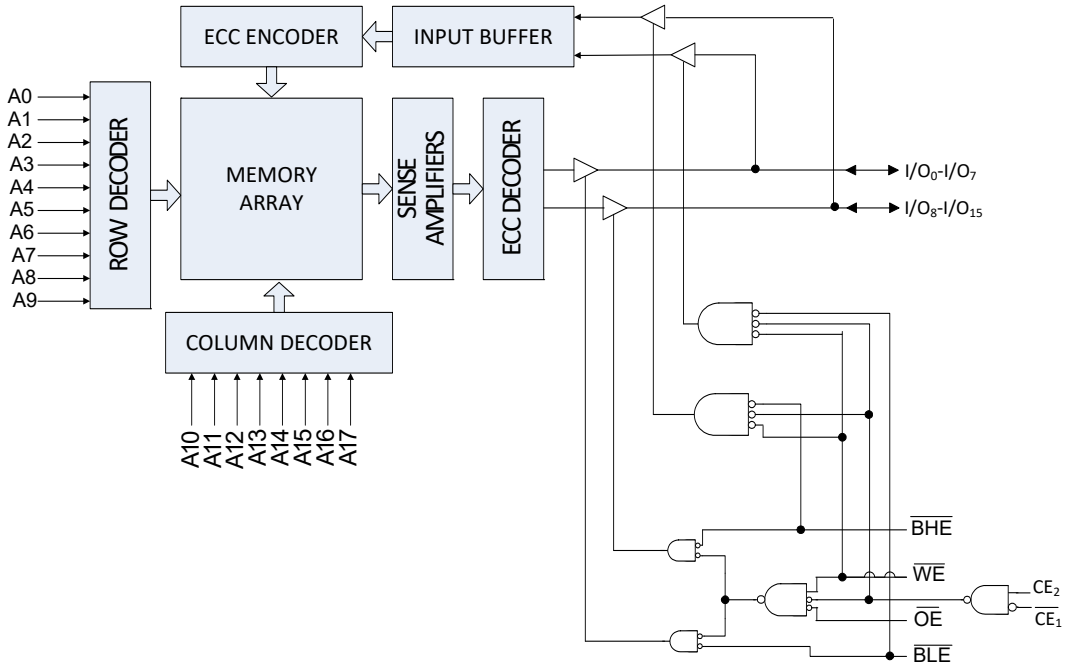

Logic Block Diagram – CY62147GE

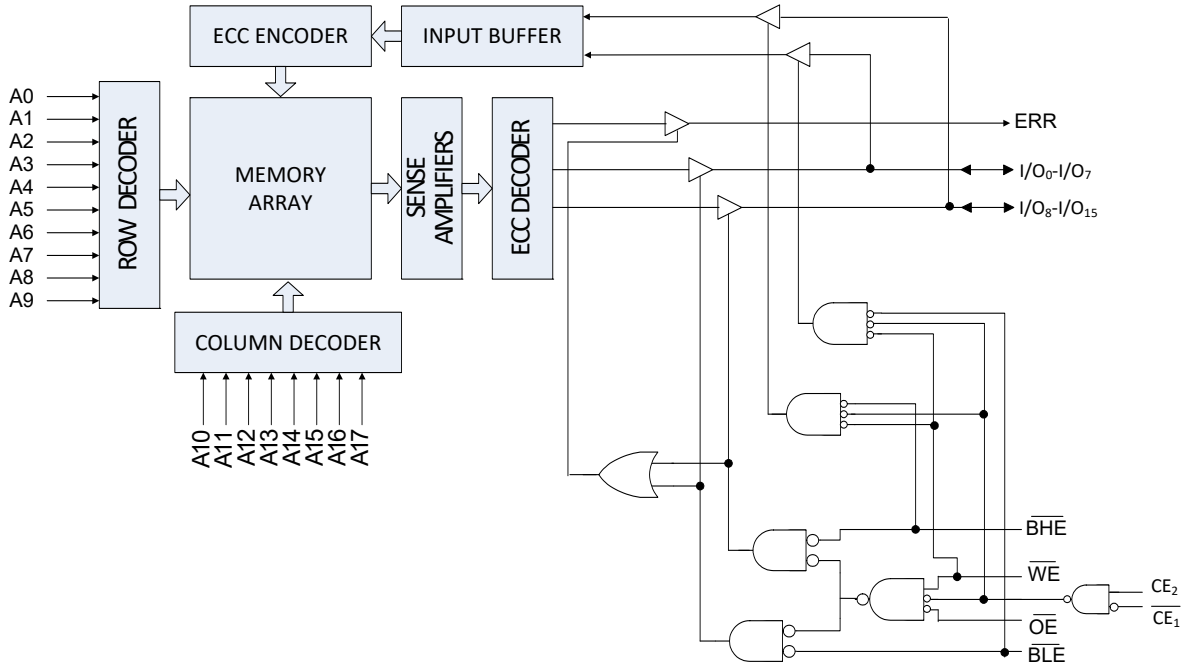

Contents

Pin Configuration – CY62147G **4**
Pin Configuration – CY62147GE **5**
Pin Configuration – CY621472G **6**
Maximum Ratings **7**
Operating Range **7**
DC Electrical Characteristics **7**
Capacitance **9**
Thermal Resistance **9**
AC Test Loads and Waveforms **9**
Data Retention Characteristics **10**
Data Retention Waveform **10**
AC Switching Characteristics **11**
Switching Waveforms **12**
Truth Table – CY62147G/CY62147GE **16**
ERR Output – CY62147GE **16**
Ordering Information **17**
Ordering Code Definitions 18
Package Diagrams **19**
Acronyms **20**
Document Conventions **20**
Units of Measure 20
Document History Page **21**
Sales, Solutions, and Legal Information **22**
Worldwide Sales and Design Support 22
Products 22
PSoC® Solutions 22
Cypress Developer Community 22
Technical Support 22

Pin Configuration – CY62147G

Figure 1. 48-ball VFBGA pinout (Dual Chip Enable without ERR), CY62147G [5]

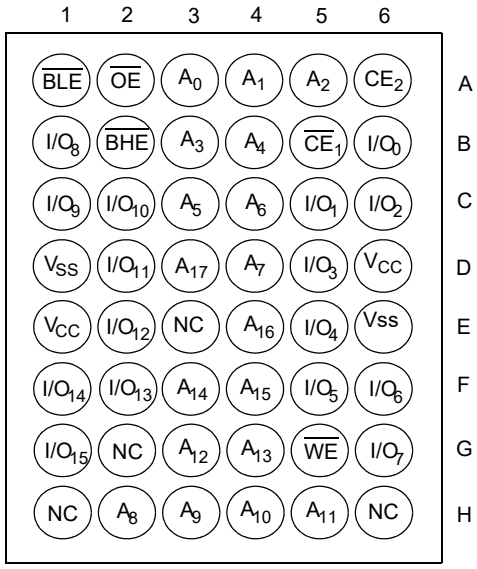


Figure 2. 48-ball VFBGA pinout (Single Chip Enable without ERR), CY62147G [5]


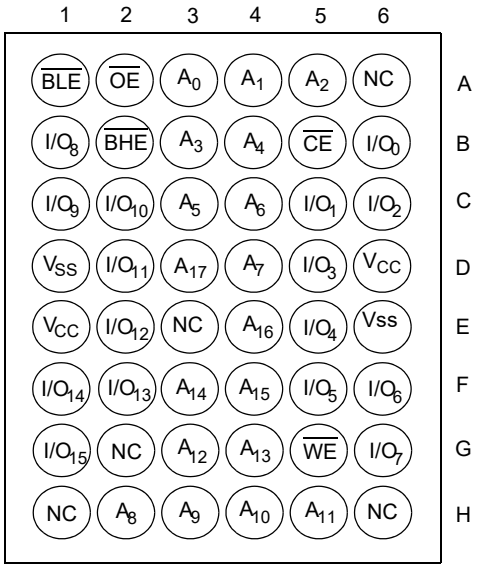


Figure 3. 44-pin TSOP II pinout (Single Chip Enable without ERR), CY62147G [5]

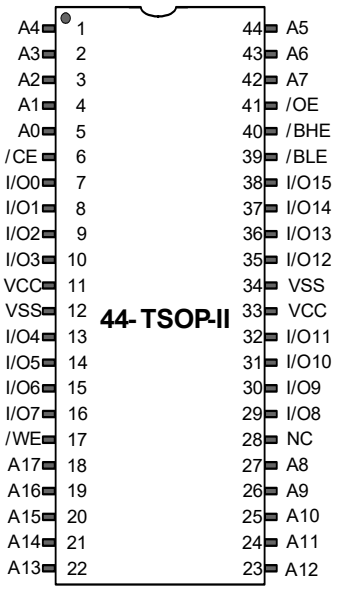

Notes

5. NC pins are not connected internally to the die and are typically used for address expansion to a higher-density device. Refer to the respective datasheets for pin configuration.

Pin Configuration – CY62147GE

Figure 4. 48-ball VFBGA pinout (Dual Chip Enable with ERR), CY62147GE [6, 7]

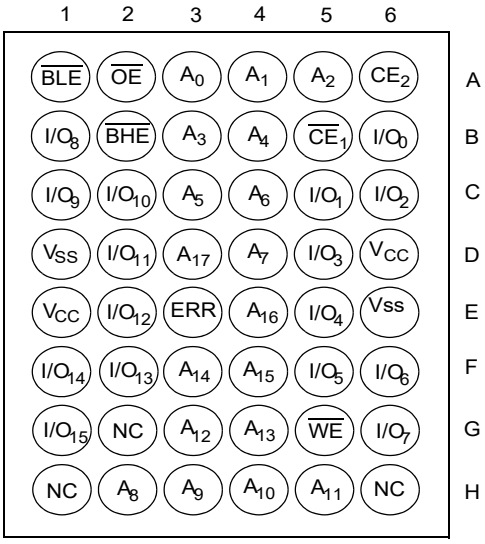


Figure 5. 48-ball VFBGA pinout (Single Chip Enable with ERR), CY62147GE [6, 7]


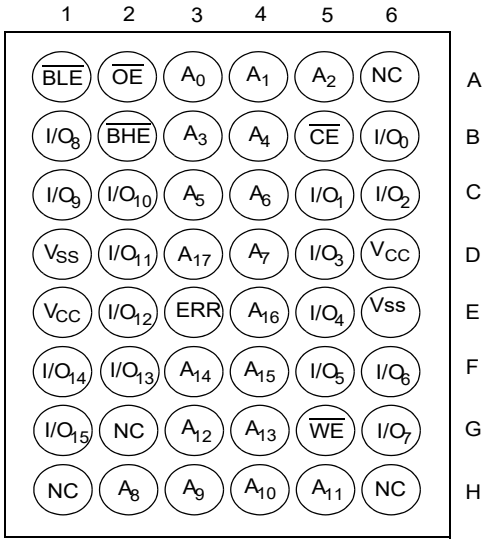



Figure 6. 44-pin TSOP II pinout (Single Chip Enable with ERR), CY62147GE [6, 7]

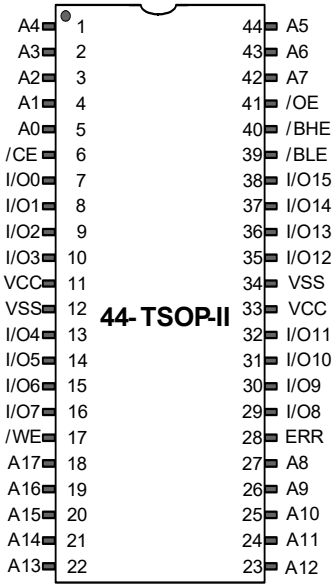

Notes
6. NC pins are not connected internally to the die and are typically used for address expansion to a higher-density device. Refer to the respective datasheets for pin configuration.
7. ERR is an output pin.

Pin Configuration – CY621472G

Figure 7. 44-pin TSOP II pinout (Dual Chip Enable without ERR), CY621472G

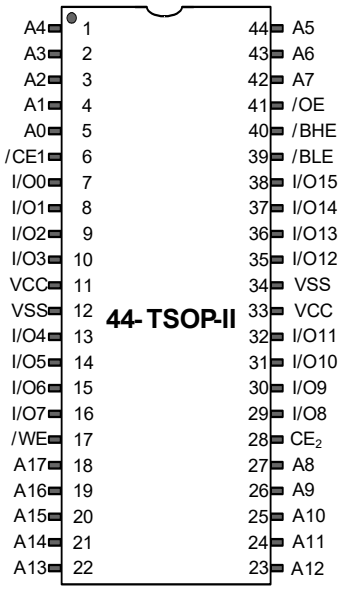

Maximum Ratings

Exceeding maximum ratings may shorten the useful life of the device. User guidelines are not tested.

Storage temperature ..... –65 °C to + 150 °C

Ambient temperature with power applied ..... –55 °C to + 125 °C

Supply voltage to ground potential [8] ..... –0.5 V to V_{CC} + 0.5 V

DC voltage applied to outputs in HI-Z state [8] ..... –0.5 V to V_{CC} + 0.5 V

DC input voltage [8] ..... –0.5 V to V_{CC} + 0.5 V

Output current into outputs (in low state) ..... 20 mA

Static discharge voltage (MIL-STD-883, Method 3015) ..... >2001 V

Latch-up current ..... >140 mA

Operating Range

Grade	Ambient Temperature	V_{CC}
Industrial	–40 °C to +85 °C	1.65 V to 2.2 V, 2.2 V to 3.6 V, 4.5 V to 5.5 V

DC Electrical Characteristics

Over the operating range of –40 °C to 85 °C

Parameter	Description		Test Conditions		45 ns / 55 ns			Unit
					Min	Typ	Max	
V_{OH}	Output HIGH voltage	1.65 V to 2.2 V	V_{CC} = Min, I_{OH} = –0.1 mA		1.4	–	–	V
		2.2 V to 2.7 V	V_{CC} = Min, I_{OH} = –0.1 mA		2	–	–	
		2.7 V to 3.6 V	V_{CC} = Min, I_{OH} = –1.0 mA		2.4	–	–	
		4.5 V to 5.5 V	V_{CC} = Min, I_{OH} = –1.0 mA		2.4	–	–	
		4.5 V to 5.5 V	V_{CC} = Min, I_{OH} = –0.1 mA		V_{CC} – 0.5[9]	–	–	
V_{OL}	Output LOW voltage	1.65 V to 2.2 V	V_{CC} = Min, I_{OL} = 0.1 mA		–	–	0.2	V
		2.2 V to 2.7 V	V_{CC} = Min, I_{OL} = 0.1 mA		–	–	0.4	
		2.7 V to 3.6 V	V_{CC} = Min, I_{OL} = 2.1 mA		–	–	0.4	
		4.5 V to 5.5 V	V_{CC} = Min, I_{OL} = 2.1 mA		–	–	0.4	
V_{IH}	Input HIGH voltage	1.65 V to 2.2 V	–		1.4	–	V_{CC} + 0.2[8]	V
		2.2 V to 2.7 V	–		1.8	–	V_{CC} + 0.3[8]	
		2.7 V to 3.6 V	–		2	–	V_{CC} + 0.3[8]	
		4.5 V to 5.5 V	–		2.2	–	V_{CC} + 0.5[8]	
V_{IL}	Input LOW voltage	1.65 V to 2.2 V	–		–0.2[8]	–	0.4	V
		2.2 V to 2.7 V	–		–0.3[8]	–	0.6	
		2.7 V to 3.6 V	–		–0.3[8]	–	0.8	
		4.5 V to 5.5 V	–		–0.5[8]	–	0.8	
I_{IX}	Input leakage current		GND ≤ V_{IN} ≤ V_{CC}		–1	–	+1	µA
I_{OZ}	Output leakage current		GND ≤ V_{OUT} ≤ V_{CC}, Output disabled		–1	–	+1	µA
I_{CC}	V_{CC} operating supply current		Max V_{CC}, I_{OUT} = 0 mA, CMOS levels	f = 22.22 MHz (45 ns)	–	15	20	mA
				f = 18.18 MHz (55 ns)	–	15	20	mA
				f = 1 MHz	–	3.5	6	mA

Notes
8. $V_{IL(min)}$ = –2.0 V and $V_{IH(max)}$ = V_{CC} + 2 V for pulse durations of less than 20 ns.
9. This parameter is guaranteed by design and not tested.

DC Electrical Characteristics (continued)

Over the operating range of –40 °C to 85 °C

Parameter	Description	Test Conditions		45 ns / 55 ns			Unit
				Min	Typ	Max	
I_{SB1}[10]	Automatic power down current – CMOS inputs; V_{CC} = 2.2 V to 3.6 V and 4.5 V to 5.5 V	$\overline{CE}_1 \geq V_{CC} - 0.2$ V or $CE_2 \leq 0.2$ V, ($\overline{BHE}$ and $\overline{BLE}$) $\geq V_{CC} - 0.2$ V, $V_{IN} \geq V_{CC} - 0.2$ V, $V_{IN} \leq 0.2$ V, f = f_{max} (address and data only), f = 0 ($\overline{OE}$, and $\overline{WE}$), Max V_{CC}		–	3.5	8.7	µA
	Automatic power down current – CMOS inputs V_{CC} = 1.65 V to 2.2 V			–	–	10	
I_{SB2}[10]	Automatic power down current – CMOS inputs V_{CC} = 2.2 V to 3.6 V and 4.5 V to 5.5 V	$\overline{CE}_1 \geq V_{CC} - 0.2$V or $CE_2 \leq 0.2$ V, ($\overline{BHE}$ and $\overline{BLE}$) $\geq V_{CC} - 0.2$ V, $V_{IN} \geq V_{CC} - 0.2$ V or $V_{IN} \leq 0.2$ V, f = 0, Max V_{CC}	25 °C [11]	–	3.5	3.7	µA
			40 °C [11]	–	–	4.8	
			70 °C [11]	–	–	7	
			85 °C	–	–	8.7	
	Automatic power down current – CMOS inputs V_{CC} = 1.65 V to 2.2 V	$\overline{CE}_1 \geq V_{CC} - 0.2$V or $CE_2 \leq 0.2$ V or ($\overline{BHE}$ and $\overline{BLE}$) $\geq V_{CC} - 0.2$ V, $V_{IN} \geq V_{CC} - 0.2$ V or $V_{IN} \leq 0.2$ V, f = 0, Max V_{CC}	25 °C [11]	–	3.5	4.3	
			40 °C [11]	–	–	5	
			70 °C [11]	–	–	7.5	
			85 °C	–	–	10	

Notes
10. Chip enables ($\overline{CE}_1$ and CE_2) must be tied to CMOS levels to meet the I_{SB1} / I_{SB2} / I_{CCDR} spec. Other inputs can be left floating.
11. The I_{SB2} limits at 25 °C, 40 °C, 70 °C, and typical limit at 85 °C are guaranteed by design and not 100% tested.

Capacitance


Parameter [12]	Description	Test Conditions	Max	Unit
C_{IN}	Input capacitance	T_A = 25 °C, f = 1 MHz, V_{CC} = $V_{CC(typ)}$	10	pF
C_{OUT}	Output capacitance		10	pF

Thermal Resistance

Parameter [12]	Description	Test Conditions	48-ball VFBGA	44-pin TSOP II	Unit
Θ_{JA}	Thermal resistance (junction to ambient)	Still air, soldered on a 3 × 4.5 inch, four-layer printed circuit board	31.35	68.85	°C/W
Θ_{JC}	Thermal resistance (junction to case)		14.74	15.97	°C/W

AC Test Loads and Waveforms

Figure 8. AC Test Loads and Waveforms[13]

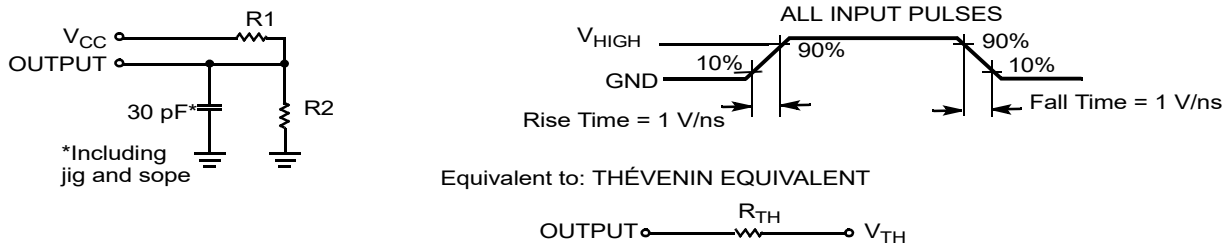

Parameters	1.8 V	2.5 V	3.0 V	5.0 V	Unit
R1	13500	16667	1103	1800	Ω
R2	10800	15385	1554	990	Ω
R_{TH}	6000	8000	645	639	Ω
V_{TH}	0.80	1.20	1.75	1.77	V

Notes
12. Tested initially and after any design or process changes that may affect these parameters.
13. Full-device operation requires linear V_{CC} ramp from V_{DR} to $V_{CC(min)}$ ≥ 100 µs or stable at $V_{CC(min)}$ ≥ 100 µs.


Data Retention Characteristics

Over the Operating range

Parameter	Description	Conditions	Min	Typ[14]	Max	Unit
V_{DR}	V_{CC} for data retention		1	–	–	V
I_{CCDR}[15, 16]	Data retention current	V_{CC} = 1.2 V $\overline{CE}_1 \geq V_{CC} - 0.2$ V or $CE_2 \leq 0.2$ V or ($\overline{BHE}$ and $\overline{BLE}$) $\geq V_{CC} - 0.2$ V, $V_{IN} \geq V_{CC} - 0.2$ V or $V_{IN} \leq 0.2$ V	–	–	13	µA
t_{CDR}[17]	Chip deselect to data retention time		0	–	–	ns
t_R[18]	Operation recovery time		45/55	–	–	ns

Data Retention Waveform

Figure 9. Data Retention Waveform [19]

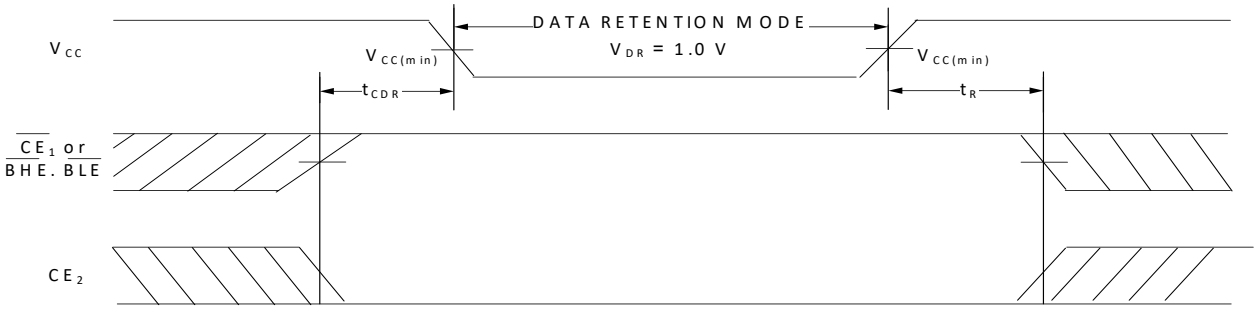

Notes

14. Typical values are included only for reference and are not guaranteed or tested. Typical values are measured at V_{CC} = 1.8 V (for V_{CC} range of 1.65 V–2.2 V), V_{CC} = 3 V (for V_{CC} range of 2.2 V–3.6 V), and V_{CC} = 5 V (for V_{CC} range of 4.5 V–5.5 V), T_A = 25 °C.
15. Chip enables ($\overline{CE}_1$ and CE_2) must be tied to CMOS levels to meet the I_{SB1} / I_{SB2} / I_{CCDR} spec. Other inputs can be left floating.
16. I_{CCDR} is guaranteed only after device is first powered up to $V_{CC(min)}$ and then brought down to V_{DR}.
17. These parameters are guaranteed by design.
18. Full-device operation requires linear V_{CC} ramp from V_{DR} to $V_{CC(min)} \geq 100$ µs or stable at $V_{CC(min)} \geq 100$ µs.
19. $\overline{BHE}$.$\overline{BLE}$ is the AND of both $\overline{BHE}$ and $\overline{BLE}$. Deselect the chip by either disabling the chip enable signals or by disabling both $\overline{BHE}$ and $\overline{BLE}$.

AC Switching Characteristics

Parameter [20, 21]	Description	45 ns		55 ns		Unit
		Min	Max	Min	Max	
Read Cycle						
t_{RC}	Read cycle time	45	–	55	–	ns
t_{AA}	Address to data valid / Address to ERR valid	–	45	–	55	ns
t_{OHA}	Data hold from address change / ERR hold from address change	10	–	10	–	ns
t_{ACE}	$\overline{CE}_1$ LOW and CE_2 HIGH to data valid / $\overline{CE}$ LOW to ERR valid	–	45	–	55	ns
t_{DOE}	$\overline{OE}$ LOW to data valid / $\overline{OE}$ LOW to ERR valid	–	22	–	25	ns
t_{LZOE}	$\overline{OE}$ LOW to Low impedance[21, 23]	5	–	5	–	ns
t_{HZOE}	$\overline{OE}$ HIGH to HI-Z[21, 22, 23]	–	18	–	18	ns
t_{LZCE}	$\overline{CE}_1$ LOW and CE_2 HIGH to Low impedance[21, 23]	10	–	10	–	ns
t_{HZCE}	$\overline{CE}_1$ HIGH and CE_2 LOW to HI-Z[21, 22, 23]	–	18	–	18	ns
t_{PU}	$\overline{CE}_1$ LOW and CE_2 HIGH to power-up[23]	0	–	0	–	ns
t_{PD}	$\overline{CE}_1$ HIGH and CE_2 LOW to power-down[23]	–	45	–	55	ns
t_{DBE}	$\overline{BLE}$ / $\overline{BHE}$ LOW to data valid	–	45	–	55	ns
t_{LZBE}	$\overline{BLE}$ / $\overline{BHE}$ LOW to Low impedance[21, 23]	5	–	5	–	ns
t_{HZBE}	$\overline{BLE}$ / $\overline{BHE}$ HIGH to HI-Z[21, 22, 23]	–	18	–	18	ns
Write Cycle[24, 25]						
t_{WC}	Write cycle time	45	–	55	–	ns
t_{SCE}	$\overline{CE}_1$ LOW and CE_2 HIGH to write end	35	–	45	–	ns
t_{AW}	Address setup to write end	35	–	45	–	ns
t_{HA}	Address hold from write end	0	–	0	–	ns
t_{SA}	Address setup to write start	0	–	0	–	ns
t_{PWE}	$\overline{WE}$ pulse width	35	–	40	–	ns
t_{BW}	$\overline{BLE}$ / $\overline{BHE}$ LOW to write end	35	–	45	–	ns
t_{SD}	Data setup to write end	25	–	25	–	ns
t_{HD}	Data hold from write end	0	–	0	–	ns
t_{HZWE}	$\overline{WE}$ LOW to HI-Z[21, 22, 23]	–	18	–	20	ns
t_{LZWE}	$\overline{WE}$ HIGH to Low impedance[21, 23]	10	–	10	–	ns

Notes

20. Test conditions assume a signal transition time (rise/fall) of 3 ns or less, timing reference levels of 1.5 V (for $V_{CC} \geq 3$ V) and $V_{CC}/2$ (for $V_{CC} < 3$ V), and input pulse levels of 0 to 3 V (for $V_{CC} \geq 3$ V) and 0 to V_{CC} (for $V_{CC} < 3$ V). Test conditions for the read cycle use output loading shown in AC Test Loads and Waveforms section, unless specified otherwise.
21. At any temperature and voltage condition, t_{HZCE} is less than t_{LZCE}, t_{HZBE} is less than t_{LZBE}, t_{HZOE} is less than t_{LZOE}, and t_{HZWE} is less than t_{LZWE} for any device.
22. t_{HZOE}, t_{HZCE}, t_{HZBE}, and t_{HZWE} transitions are measured when the outputs enter a high-impedance state.
23. These parameters are guaranteed by design.
24. The internal write time of the memory is defined by the overlap of $\overline{WE}$ = V_{IL}, $\overline{CE}_1$ = V_{IL}, $\overline{BHE}$ or $\overline{BLE}$, or both = V_{IL}, and CE_2 = V_{IH}. All signals must be ACTIVE to initiate a write and any of these signals can terminate a write by going INACTIVE. The data input setup and hold timing must refer to the edge of the signal that terminates the write.
25. The minimum pulse width in Write Cycle No. 3 ($\overline{WE}$ Controlled, $\overline{OE}$ LOW) should be equal to sum of t_{SD} and t_{HZWE}.

Switching Waveforms

Figure 10. Read Cycle No. 1 of CY62147G (Address Transition Controlled) [26, 27]


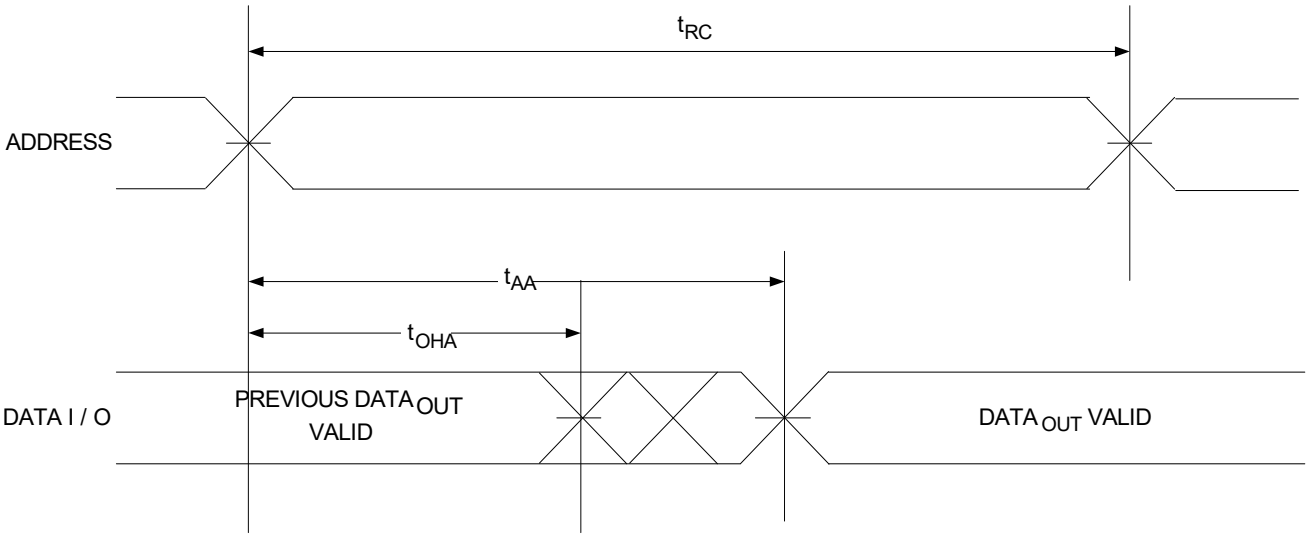


Figure 11. Read Cycle No. 1 of CY62147GE (Address Transition Controlled) [26, 27]

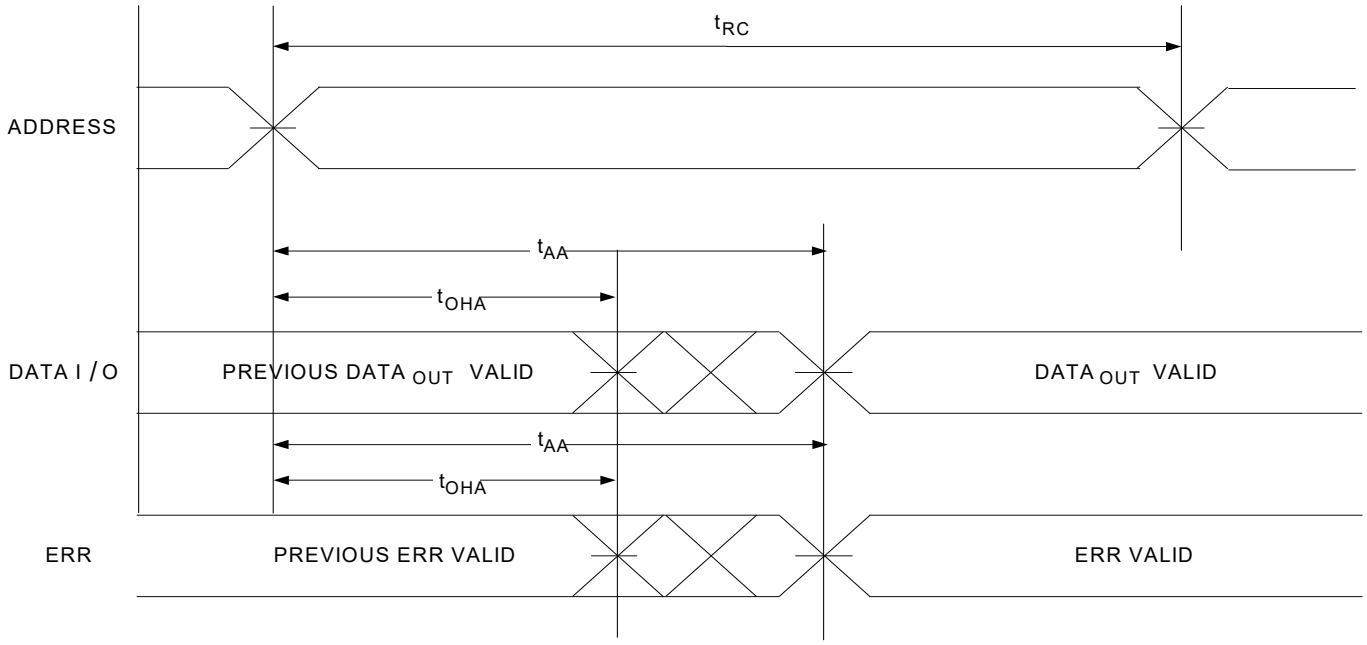

Notes
26. The device is continuously selected. $\overline{OE}$ = V_{IL}, $\overline{CE}$ = V_{IL}, $\overline{BHE}$ or $\overline{BLE}$ or both = V_{IL}.
27. $\overline{WE}$ is HIGH for Read cycle.

Switching Waveforms (continued)

Figure 12. Read Cycle No. 2 (OE Controlled) [28, 29, 30]


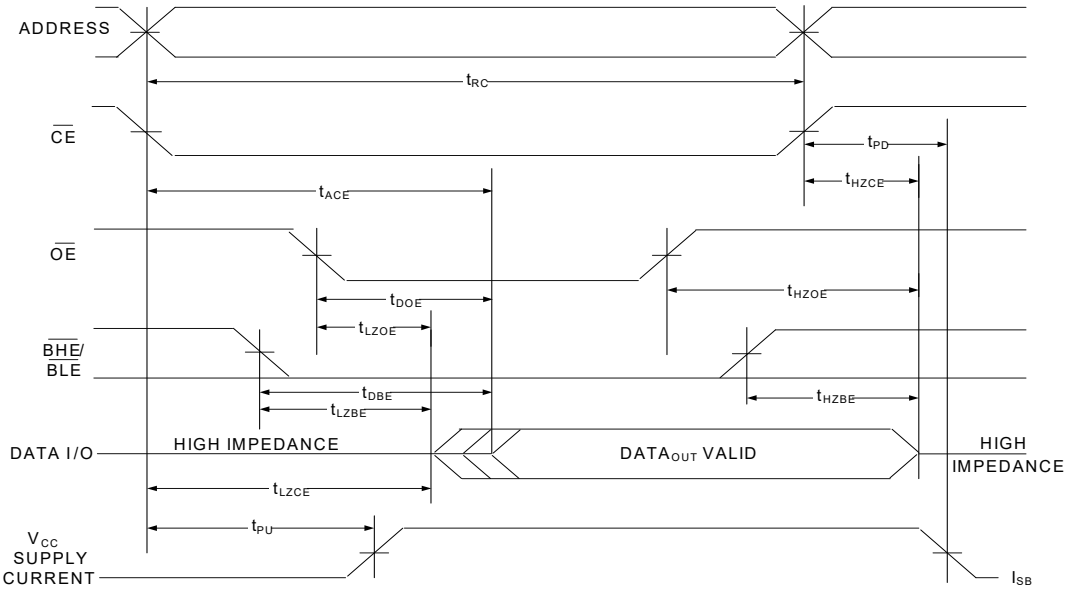


Figure 13. Write Cycle No. 1 (WE Controlled) [29, 31, 32]

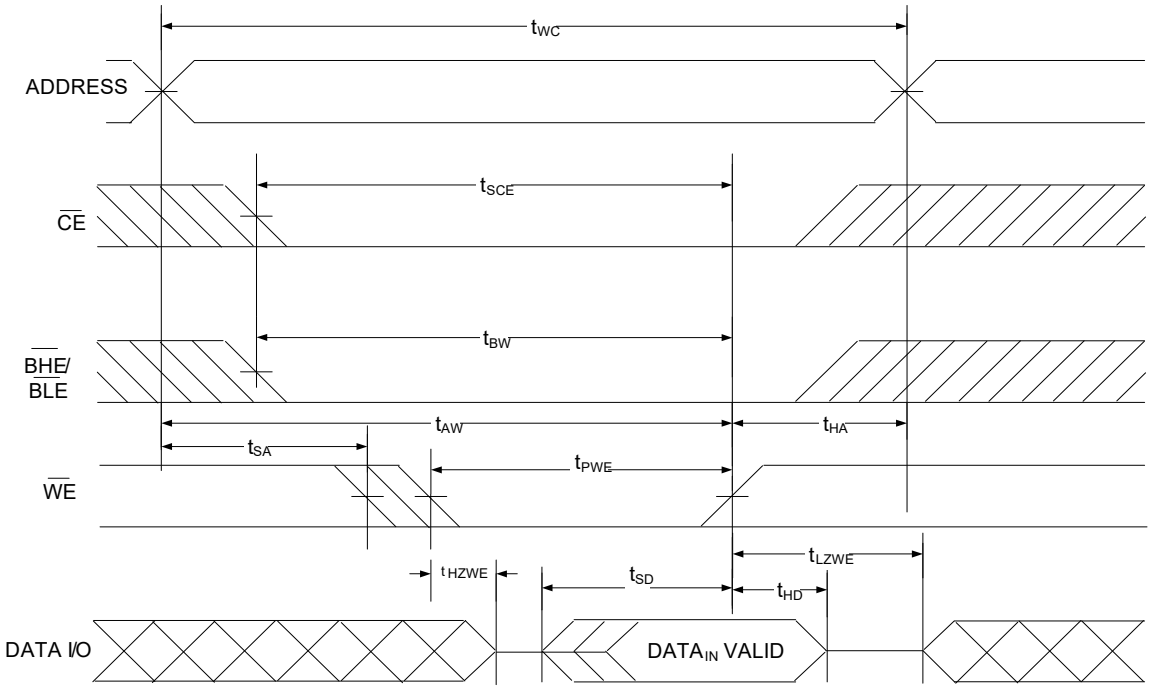

Notes

28. WE is HIGH for Read cycle.
29. For all dual chip enable devices, CE is the logical combination of CE_1 and CE_2. When CE_1 is LOW and CE_2 is HIGH, CE is LOW; when CE_1 is HIGH or CE_2 is LOW, CE is HIGH.
30. Address valid prior to or coincident with CE LOW transition.
31. The internal write time of the memory is defined by the overlap of WE = V_{IL}, CE_1 = V_{IL}, BHE or BLE or both = V_{IL}, and CE_2 = V_{IH}. All signals must be ACTIVE to initiate a write and any of these signals can terminate a write by going INACTIVE. The data input setup and hold timing must refer to the edge of the signal that terminates the write.
32. Data I/O is in a HI-Z state if CE = V_{IH}, or OE = V_{IH} or BHE, and/or BLE = V_{IH}.

Switching Waveforms (continued)

Figure 14. Write Cycle No. 2 ($\overline{CE}$ Controlled) [33, 34, 35]


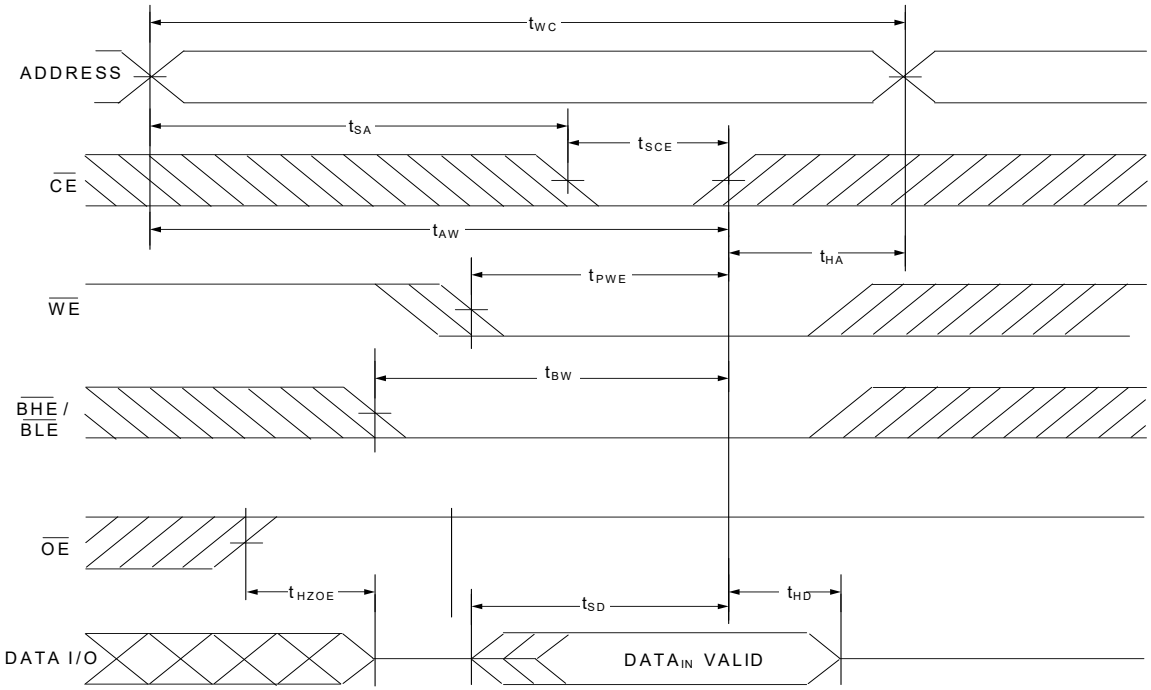


Figure 15. Write Cycle No. 3 ($\overline{WE}$ Controlled, $\overline{OE}$ LOW) [33, 34, 35, 36]

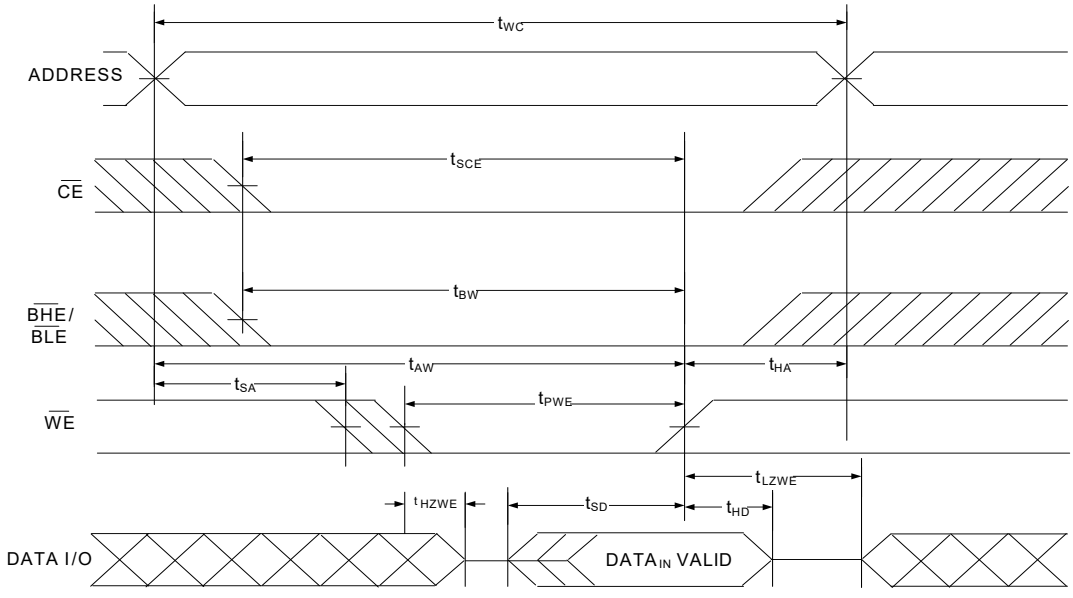


Notes

33. For all dual chip enable devices, $\overline{CE}$ is the logical combination of $\overline{CE}_1$ and CE_2. When $\overline{CE}_1$ is LOW and CE_2 is HIGH, $\overline{CE}$ is LOW; when $\overline{CE}_1$ is HIGH or CE_2 is LOW, $\overline{CE}$ is HIGH.
34. The internal write time of the memory is defined by the overlap of $\overline{WE}$ = V_{IL}, $\overline{CE}_1$ = V_{IL}, $\overline{BHE}$ or $\overline{BLE}$ or both = V_{IL}, and CE_2 = V_{IH}. All signals must be ACTIVE to initiate a write and any of these signals can terminate a write by going INACTIVE. The data input setup and hold timing must refer to the edge of the signal that terminates the write.
35. Data I/O is in HI-Z state if $\overline{CE}$ = V_{IH}, or $\overline{OE}$ = V_{IH} or $\overline{BHE}$, and/or $\overline{BLE}$ = V_{IH}.
36. The minimum write pulse width for Write Cycle No. 3 ($\overline{WE}$ Controlled, $\overline{OE}$ LOW) should be sum of t_{HZWE} and t_{SD}.

Switching Waveforms (continued)

Figure 16. Write Cycle No. 4 ($\overline{BHE}$/$\overline{BLE}$ Controlled) [37, 38, 39]

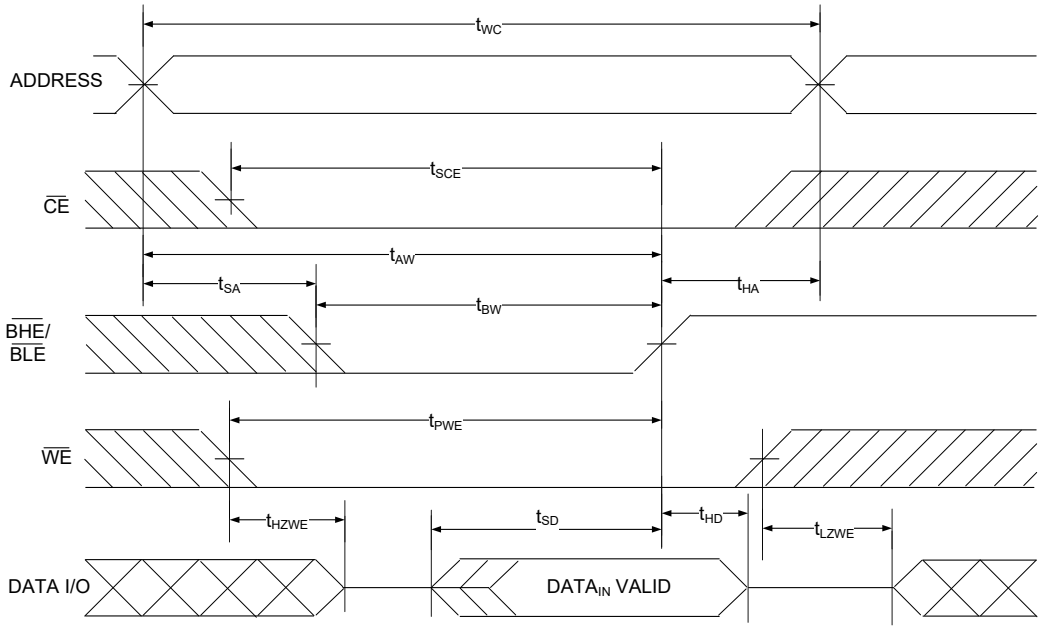

Notes
37. For all dual chip enable devices, $\overline{CE}$ is the logical combination of $\overline{CE}_1$ and CE_2. When $\overline{CE}_1$ is LOW and CE_2 is HIGH, $\overline{CE}$ is LOW; when $\overline{CE}_1$ is HIGH or CE_2 is LOW, $\overline{CE}$ is HIGH.
38. The internal write time of the memory is defined by the overlap of $\overline{WE}$ = V_{IL}, $\overline{CE}_1$ = V_{IL}, $\overline{BHE}$ or $\overline{BLE}$ or both = V_{IL}, and CE_2 = V_{IH}. All signals must be ACTIVE to initiate a write and any of these signals can terminate a write by going INACTIVE. The data input setup and hold timing must refer to the edge of the signal that terminates the write.
39. Data I/O is in a HI-Z state if $\overline{CE}$ = V_{IH}, or $\overline{OE}$ = V_{IH} or $\overline{BHE}$, and/or $\overline{BLE}$ = V_{IH}.

Truth Table – CY62147G/CY62147GE

$\overline{CE_1}$/$\overline{CE}$[40]	CE_2[40]	$\overline{WE}$	$\overline{OE}$	$\overline{BHE}$	$\overline{BLE}$	Inputs/Outputs	Mode	Power
H	X[41]	X	X	X	X	HI-Z	Deselect/Power-down	Standby (I_{SB})
X	L	X	X	X	X	HI-Z	Deselect/Power-down	Standby (I_{SB})
X	X	X	X	H	H	HI-Z	Deselect/Power-down	Standby (I_{SB})
L	H	H	L	L	L	Data Out (I/O_0–I/O_{15})	Read	Active (I_{CC})
L	H	H	L	H	L	Data Out (I/O_0–I/O_7); HI-Z (I/O_8–I/O_{15})	Read	Active (I_{CC})
L	H	H	L	L	H	HI-Z (I/O_0–I/O_7); Data Out (I/O_8–I/O_{15})	Read	Active (I_{CC})
L	H	H	H	L	H	HI-Z	Output disabled	Active (I_{CC})
L	H	H	H	H	L	HI-Z	Output disabled	Active (I_{CC})
L	H	H	H	L	L	HI-Z	Output disabled	Active (I_{CC})
L	H	L	X	L	L	Data In (I/O_0–I/O_{15})	Write	Active (I_{CC})
L	H	L	X	H	L	Data In (I/O_0–I/O_7); HI-Z (I/O_8–I/O_{15})	Write	Active (I_{CC})
L	H	L	X	L	H	HI-Z (I/O_0–I/O_7); Data In (I/O_8–I/O_{15})	Write	Active (I_{CC})

ERR Output – CY62147GE


Output [42]	Mode
0	Read operation, no single-bit error in the stored data.
1	Read operation, single-bit error detected and corrected.
HI-Z	Device deselected/outputs disabled/Write operation

Notes
40. For all dual chip enable devices, $\overline{CE}$ is the logical combination of $\overline{CE}_1$ and CE_2. When $\overline{CE}_1$ is LOW and CE_2 is HIGH, $\overline{CE}$ is LOW; when $\overline{CE}_1$ is HIGH or CE_2 is LOW, $\overline{CE}$ is HIGH
41. The 'X' (Don't care) state for the chip enables refer to the logic state (either HIGH or LOW). Intermediate voltage levels on these pins is not permitted.
42. ERR is an Output pin.If not used, this pin should be left floating

Ordering Information

Speed (ns)	Voltage Range	Ordering Code	Package Diagram	Package Type	Operating Range
45	2.2 V–3.6 V	CY62147G30-45BVXI	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable without ERR	Industrial
		CY62147G30-45BVXIT	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable without ERR, Tape and Reel	
		CY62147GE30-45BVXI	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable with ERR	
		CY62147GE30-45BVXIT	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable with ERR, Tape and Reel	
		CY62147G30-45ZSXI	51-85087	44-pin TSOP II without ERR	
		CY62147G30-45ZSXIT	51-85087	44-pin TSOP II without ERR, Tape and Reel	
		CY62147GE30-45ZSXI	51-85087	44-pin TSOP II with ERR	
		CY62147GE30-45ZSXI	51-85087	44-pin TSOP II with ERR, Tape and Reel	
		CY62147G30-45B2XI	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Dual Chip Enable without ERR	
		CY62147G30-45B2XIT	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Dual Chip Enable without ERR, Tape and Reel	
		CY621472G30-45ZSXI	51-85087	44-pin TSOP II without ERR, Dual Chip Enable	
		CY621472G30-45ZSXIT	51-85087	44-pin TSOP II without ERR, Dual Chip Enable, Tape and Reel	
	4.5 V–5.5 V	CY62147G-45ZSXI	51-85087	44-pin TSOP II without ERR	
		CY62147G-45ZSXIT	51-85087	44-pin TSOP II without ERR, Tape and Reel	
		CY62147GE-45ZSXI	51-85087	44-pin TSOP II with ERR	
		CY62147GE-45ZSXIT	51-85087	44-pin TSOP II with ERR, Tape and Reel	
		CY62147G-45BVXI	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable without ERR	
		CY62147G-45BVXIT	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable without ERR, Tape and Reel	
		CY62147GE-45BVXI	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable with ERR	
		CY62147GE-45BVXIT	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable with ERR, Tape and Reel	
55	1.8 V–2.2 V	CY62147G18-55ZSXI	51-85087	44-pin TSOP II without ERR	
		CY62147G18-55ZSXT	51-85087	44-pin TSOP II without ERR, Tape and Reel	
		CY62147G18-55BVXI	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable without ERR	
		CY62147G18-55BVXIT	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable without ERR, Tape and Reel	
		CY62147GE18-55ZSXI	51-85087	44-pin TSOP II with ERR	
		CY62147GE18-55ZSXIT	51-85087	44-pin TSOP II with ERR, Tape and Reel	
		CY62147GE18-55BVXI	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable with ERR	
		CY62147GE18-55BVXIT	51-85150	48-ball VFBGA (6 × 8 × 1 mm), Single Chip Enable with ERR, Tape and Reel	

Ordering Code Definitions

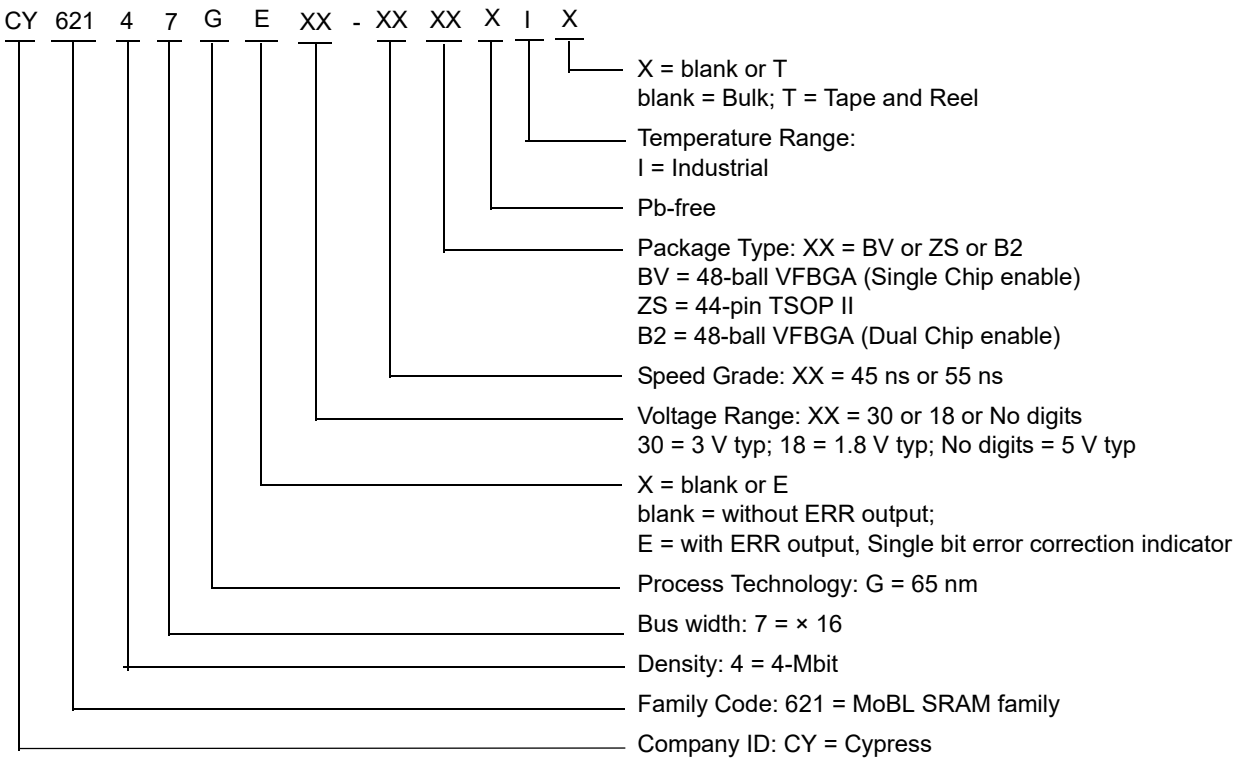

Package Diagrams

Figure 17. 44-pin TSOP II (Z44) Package Outline, 51-85087


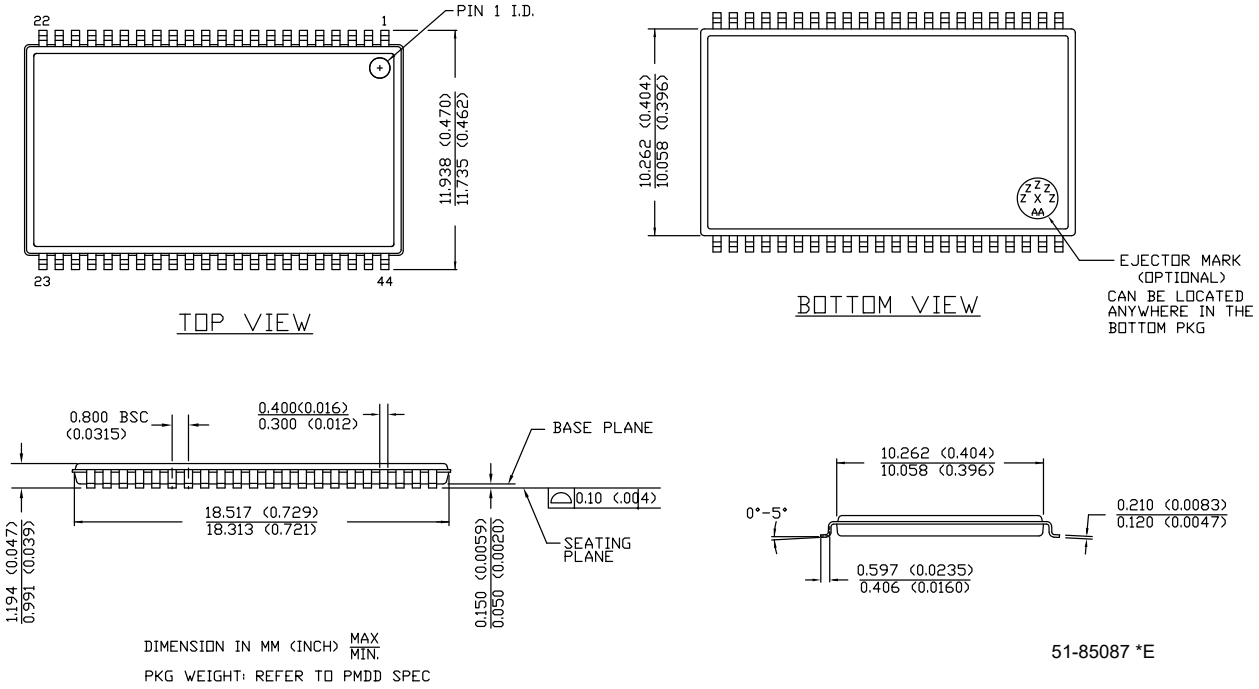


Figure 18. 48-ball VFBGA (6 × 8 × 1.0 mm) BV48/BZ48 Package Outline, 51-85150

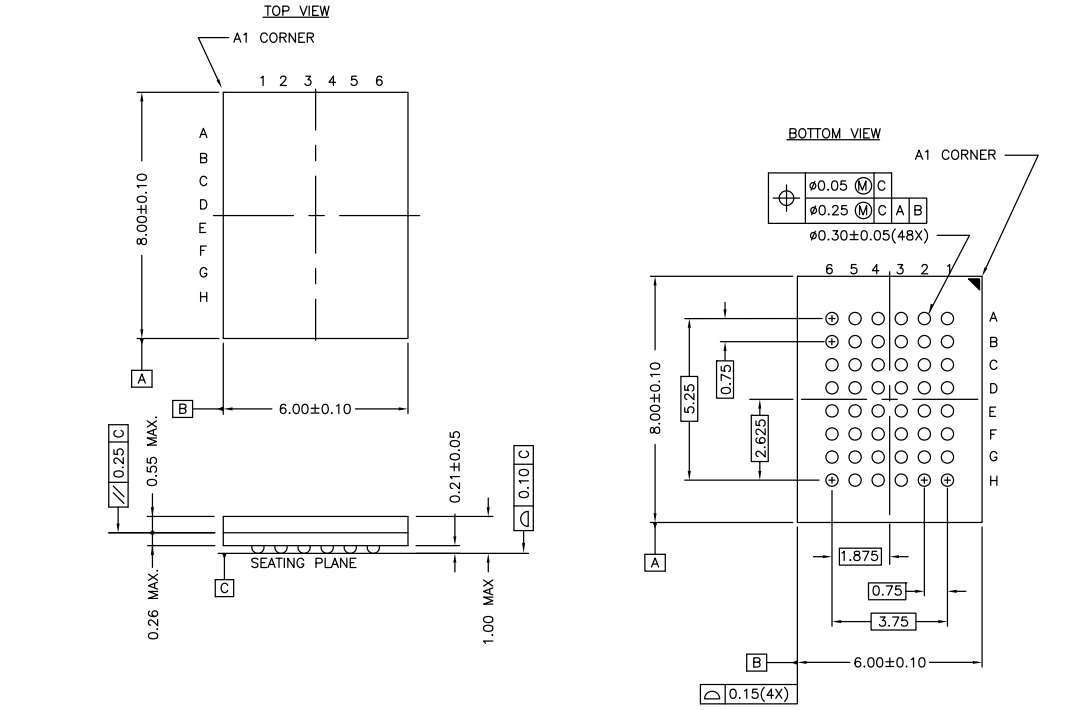

Acronyms

Acronym	Description
$\overline{BHE}$	Byte High Enable
$\overline{BLE}$	Byte Low Enable
$\overline{CE}$	Chip Enable
CMOS	Complementary Metal Oxide Semiconductor
I/O	Input/Output
$\overline{OE}$	Output Enable
SRAM	Static Random Access Memory
TSOP	Thin Small Outline Package
VFBGA	Very Fine-Pitch Ball Grid Array
$\overline{WE}$	Write Enable

Document Conventions

Units of Measure

Symbol	Unit of Measure
°C	degree Celsius
MHz	megahertz
µA	microampere
µs	microsecond
mA	milliampere
mm	millimeter
ns	nanosecond
Ω	ohm
%	percent
pF	picofarad
V	volt
W	watt

Document History Page

Document Title: CY62147G/CY621472G/CY62147GE MoBL®, 4-Mbit (256K words × 16-bit) Static RAM with Error-Correcting Code (ECC) Document Number: 001-92847				
Rev.	**ECN No.**	**Orig. of Change**	**Submission Date**	**Description of Change**
*F	4867081	NILE	07/31/2015	Changed status from Preliminary to Final.
*G	4968879	NILE	10/16/2015	Fixed typo in bookmarks.
*H	5019226	VINI	11/18/2015	Updated Ordering Information: Updated part numbers.
*I	5432584	NILE	09/10/2016	Updated Maximum Ratings: Updated Note 8 (Replaced “2 ns” with “20 ns”). Updated DC Electrical Characteristics: Changed minimum value of V_{IH} parameter from 2.0 V to 1.8 V corresponding to Operating Range “2.2 V to 2.7 V”. Updated Ordering Information: Updated part numbers. Updated to new template.
*J	5787633	NILE	06/27/2017	Updated to new template. Completing Sunset Review.
*K	6245720	NILE	07/13/2018	Updated Features: Added Note 2 and referred the same note in “Embedded ECC for single-bit error correction”. Updated to new template. Completing Sunset Review.

Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at Cypress Locations.

Products

Arm® Cortex® Microcontrollers	cypress.com/arm
Automotive	cypress.com/automotive
Clocks & Buffers	cypress.com/clocks
Interface	cypress.com/interface
Internet of Things	cypress.com/iot
Memory	cypress.com/memory
Microcontrollers	cypress.com/mcu
PSoC	cypress.com/psoc
Power Management ICs	cypress.com/pmic
Touch Sensing	cypress.com/touch
USB Controllers	cypress.com/usb
Wireless Connectivity	cypress.com/wireless

PSoC® Solutions

PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP | PSoC 6 MCU

Cypress Developer Community

Community | Projects | Video | Blogs | Training | Components

Technical Support

cypress.com/support

© Cypress Semiconductor Corporation, 2014–2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. No computing device can be absolutely secure. Therefore, despite security measures implemented in Cypress hardware or software products, Cypress does not assume any liability arising out of any security breach, such as unauthorized access to or use of a Cypress product. In addition, the products described in these materials may contain design defects or errors known as errata which may cause the product to deviate from published specifications. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.

MoBL is a registered trademark, and More Battery Life is a trademark, of Cypress Semiconductor Corporation.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Cypress Semiconductor:

CY7B9940V-5AI CY7B9973V-ACT CY7C1009B-20VC CY7C199CN-12VXAKJ CY22U1SCALGXI-00
CY62148DV30L-70SXI CY8CTMA463-44LQI CY241V8ASXC-12 CY7C4221V-15JC CY62157CV33LL-70BAI
CY7C1263KV18-500BZXC CY8CLEDAC02 S25FL064LABNFA010 CY23EP05SXC-1 CY29658AI
CY7C1011DV33-10BVXIT CY7C1041CV33-12ZCT CG7828AA CY22801KSXC-018 CY2544C
CY62146CV18LL-55BAI CYPAP111A3-10SXQ CY62136VNLL-70BAXA CY7C1020CV26-15ZSXEKJ
CY7C11681KV18-450BZXC CY7C1512KV18-300BZXC CY7C1670KV18-450BZXC CY7C194B-25VCT
CY7C68033-56LTXC CY8CTMA500-48LQI