

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/24/08	
A		REDRAWN	1/12/12	



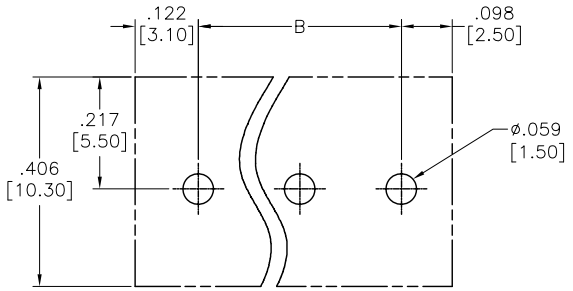

RECOMMENDED PCB LAYOUT

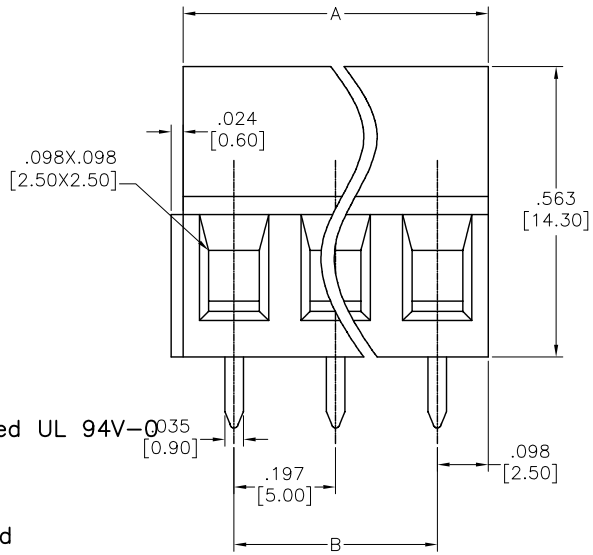

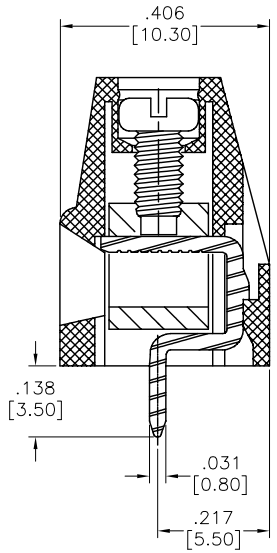

Positions: 2 thru 24
A= .197 [5.00] x No. of Positions
B= .197 [5.00] x No. of Spaces

	Tolerance
2–6P	±.006 [0.15]
7–12P	±.008 [0.20]
13–18P	±.012 [0.30]
19–24P	±.016 [0.40]

SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Clamp: Brass, Nickel plated
Contact: Brass, Tin plated
Screw: Steel, M2.5/Zn plated
Electrical:
Operation voltage: 300 VAC
Current rating: 10 Amps
Withstanding Voltage: 1.6KV
Mechanical :
Solid wire(AWG): 12–22
Stranded wire(AWG): 12–22
Torque(Lb–In): 3.5
Wire strip length(mm): 6–7
Temperature Rating:
Operating temperature: –40°C to +115°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	7/24/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908–687–5000 Fax: 908–687–5710

TITLE: MODULAR EURO BLOCK, VERTICAL, .197" [5.00] PITCH

SIZE	PART NO.	REV.
X	EBAC-XX-C	A

REF: S00007T | SCALE: NTS | SHEET 1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ADAM TECH:

PLCC-52-AT CDH-11 MDJ-009-FS SW-PB7-07LB42CRRG12V SW-PB8-AA00B2GE-2 1CH-A-10 25CH-B-07 ICS640T SD-PNN10-MMLAL-S00-000 DA15-PT-2 DMF-02-S ICM-316-1-GT-HT MTJ-88AX1-FSN-LH-M4S PH1RA-03-UA EBJA-04-C-BK MMI-P1PG10SGG52 SPH2-16-U-SMT BHR-10-VUA DB25-PT-1BLJS PH1RB-02-UA RF55-29L-T-00-50-G-SH SMC-2-08-1-GT SW-PB7-1Z-A-RG-H-3-G2A BHR-20-VUA EB163A-05-C-180 EBSA-02-A PH1-20-U-A RF1-07-T-00-75 2PH1-16-UA-SMT-B ESMC-F-80-SGS-SMT-B-PP-T/R