
ROHS

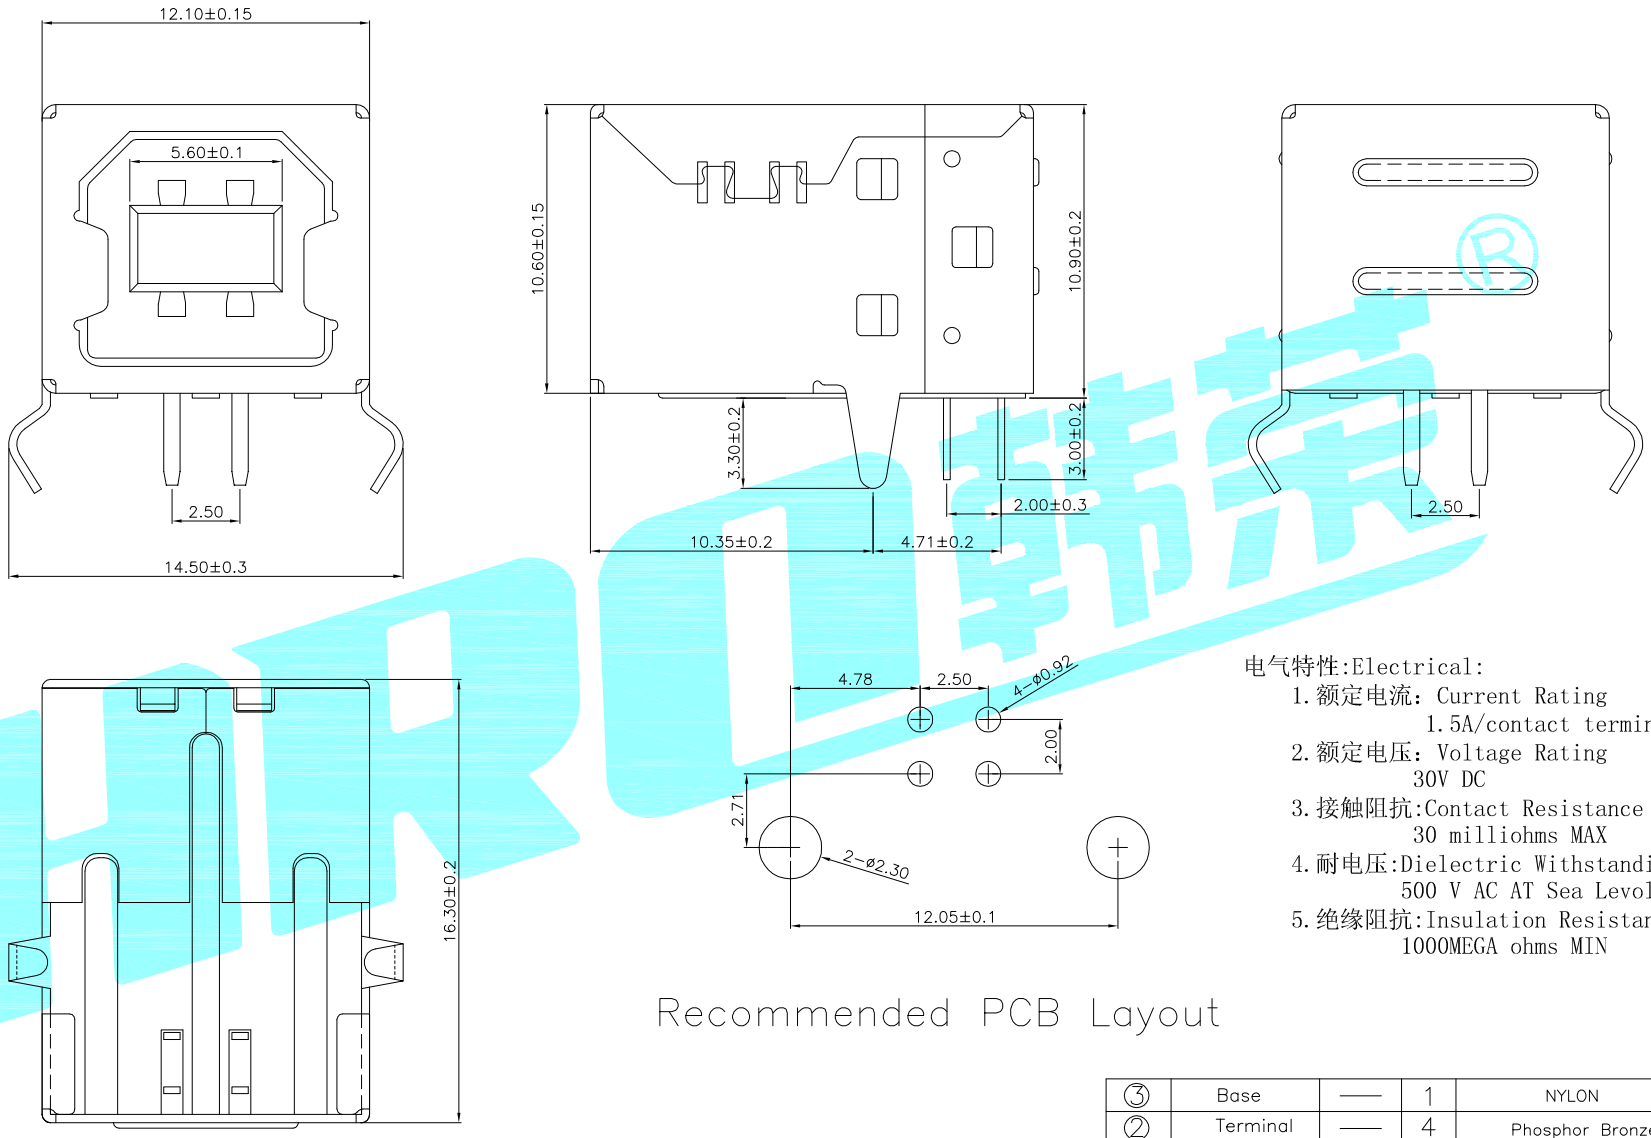

Recommended PCB Layout

电气特性:Electrical:

1. 额定电流：Current Rating
   1.5A/contact terminal
2. 额定电压：Voltage Rating
   30V DC
3. 接触阻抗:Contact Resistance
   30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
   500 V AC AT Sea Levol
5. 绝缘阻抗:Insulation Resistance:
   1000MEGA ohms MIN

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
③	Base	——	1	NYLON	White
②	Terminal	——	4	Phosphor Bronze	Ag Plated
①	Housing	——	1	SPCC/Phosphor Bronze	Ni Plated

APPROVALS		DATE
DRAWN	JIANKUN.LU	2015.03.18
CHECKED		
APPROVALS		

HRO韩荣® ELECTRONICS CO.,LTD

TITLE:	USB CONNECTOR
PART NO.	U-B-M4DD-W-1
UNIT: mm	SCALE: 1:1
DRAWING NO.	——
	PROJ:
	SHEET 1 OF 1

TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.25; 5~10 ±0.20; ~ 5 ±0.15; ANGLE ±2°

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

PJ-399B-6A TYPE-C-31-M-04 DQ-03BP U-C-M5DW-W-1 K3-1346S-F1 K8-5851D-L1 SS-22D03-G4 U-F-M5SS-W-5 U-M-M5DD-W-2 ES-07KP K2-1102AT-A4CW-01 K2-1102BG-I4CW-01 K2-1102DP-S3SW-04 K2-1102SP-K4SC-04 U-C-M5SS-Y-1 K2-1818DP-A3SW-01 PJ-3250-5A SIM-08A U-F-M5DS-Y-1 DS-01BP K5-1617SA-01 U-F-M5DD-W-L U-F-M5DD-Y-L1 K2-1102SP-A5SC-04 K3-2258S-E1 U-F-M5DD-Y-L DA-10RP DC-031A-10A K2-1101DF-A4DW-01 K2-1102DP-G4SW-04