
Technical Data
Data Sheet N2692, Rev.-

RoHS

GF6045TC Power Schottky Module Bypass Diode

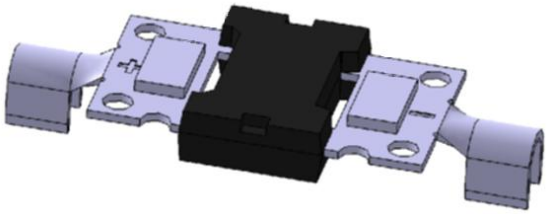

GFM

Features

- Low thermal resistance
- Lower forward voltage drop, low power loss
- Isolate Package design, ideal for heat dispersion
- High forward current capability
- Trench MOS Schottky technology
- Excellent anti-humidity
- Low profile package
- High forward surge capability
- All SMC parts are traceable to the wafer lot
- Additional electrical and life testing can be performed upon request

Mechanical Data

- Case: GFM
- Terminals: Copper
- High temperature soldering guaranteed
- Heated-tool welding 260℃,10seconds
- Marking Code: GF6045TC

Maximum Ratings(limiting values, at 25 °C unless otherwise specified)

Characteristics	Symbol	Condition	Max.	Units
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	-	45	V
Average Rectified Forward Current	$I_{F\ (AV)}$	T_C= 96°C, In DC	60	A
Peak One Cycle Non-Repetitive Surge Current	I_{FSM}	8.3 ms, half Sine pulse	450	A

Electrical Characteristics:

Characteristics	Symbol	Condition	Typ.	Max.	Units
Forward Voltage Drop*	V_{F1}	@ 60A, Pulse, T_J = 25 °C	0.47	0.6	V
Reverse Current*	I_{R1}	@V_R = rated V_R T_J = 25 °C	0.05	0.5	mA
Junction Capacitance	C_T	@V_R = 5V, T_C = 25 °C f_{SIG} = 1MHz	9995	-	pF

* Pulse width < 300 μs, duty cycle < 2%

Technical Data
Data Sheet N2692, Rev.-

RoHS

Thermal-Mechanical Specifications:

Characteristics	Symbol	Condition	Specification	Units
Junction Temperature	T_J	IN DC Forward Mode, without reverse bias, t ⩽1 h	-55 to +200	°C
Storage Temperature	T_{stg}	-	-55 to +150	°C
Typical Thermal Resistance Junction to Case	$R_{\theta JC}$	-	1.5	°C/W

Ratings and Characteristics Curves

Figure1 Typical Forward Characteristics

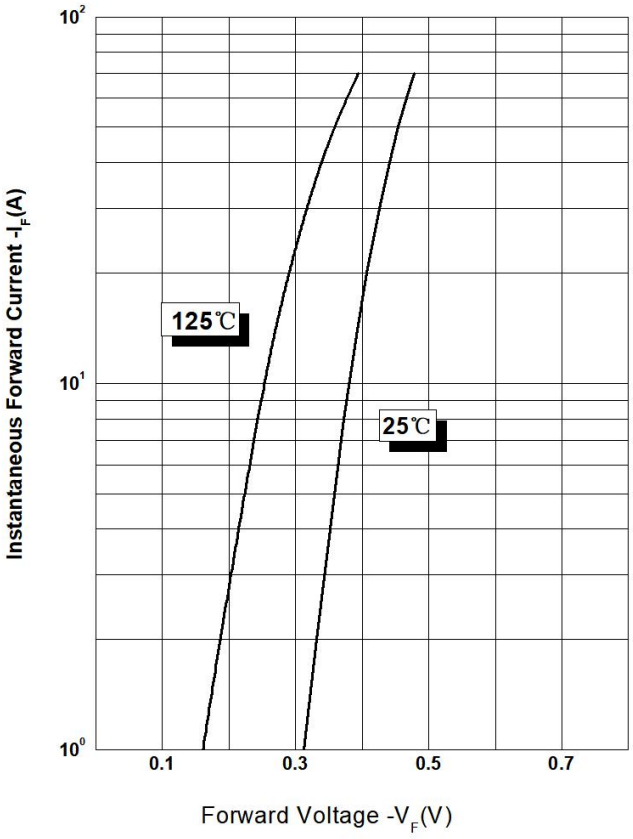


Figure 2 Typical Reverse Characteristics


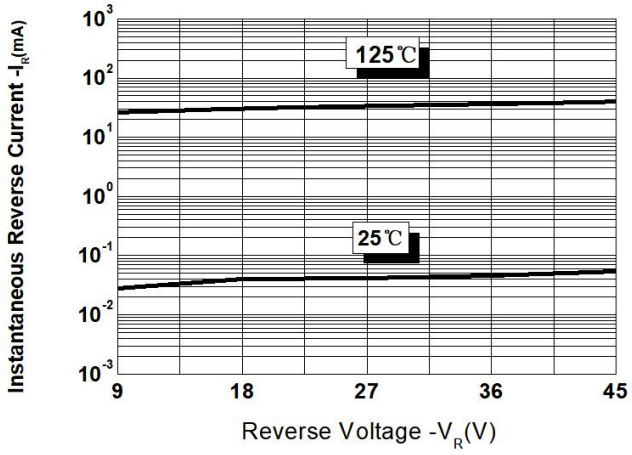


Figure 3 Typical Junction Capacitance

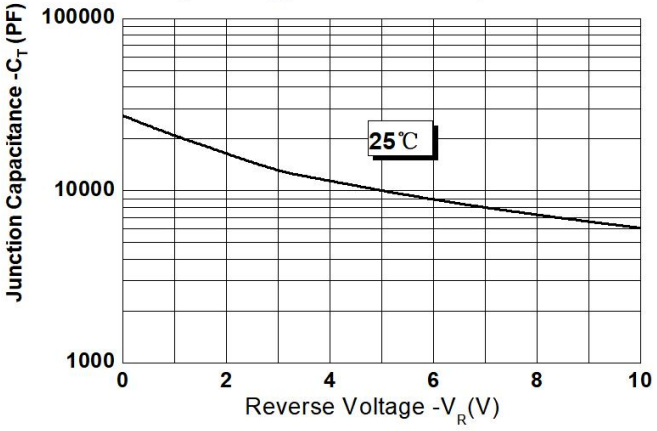


Technical Data
Data Sheet N2692, Rev.-

RoHS

Ordering Information

Device	Package	Shipping
GF6045TC	GFM	30pcs / Tube

Marking Diagram

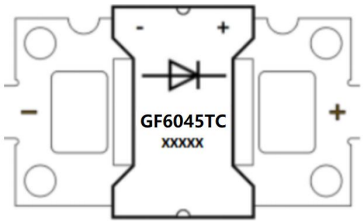

Where XXXXX is YYWWL

GF6045TC	= Marking Code
YY	= Year
WW	= Week
L	= Lot Number

Order P/N	Terminals	Additional
GF6045TC-S1	Tin Plated	None
GF6045TC-S2	Tin Plated	Solder Paste
GF6045TC-S3	Tin Plated	Solder Block
GF6045TC-N1	Nickel Plated	None
GF6045TC-N2	Nickel Plated	Solder Paste
GF6045TC-N3	Nickel Plated	Solder Block



Solder Paste




Solder Block

Technical Data
Data Sheet N2692, Rev.-

RoHS

Mechanical Dimensions GFM (Millimeters)

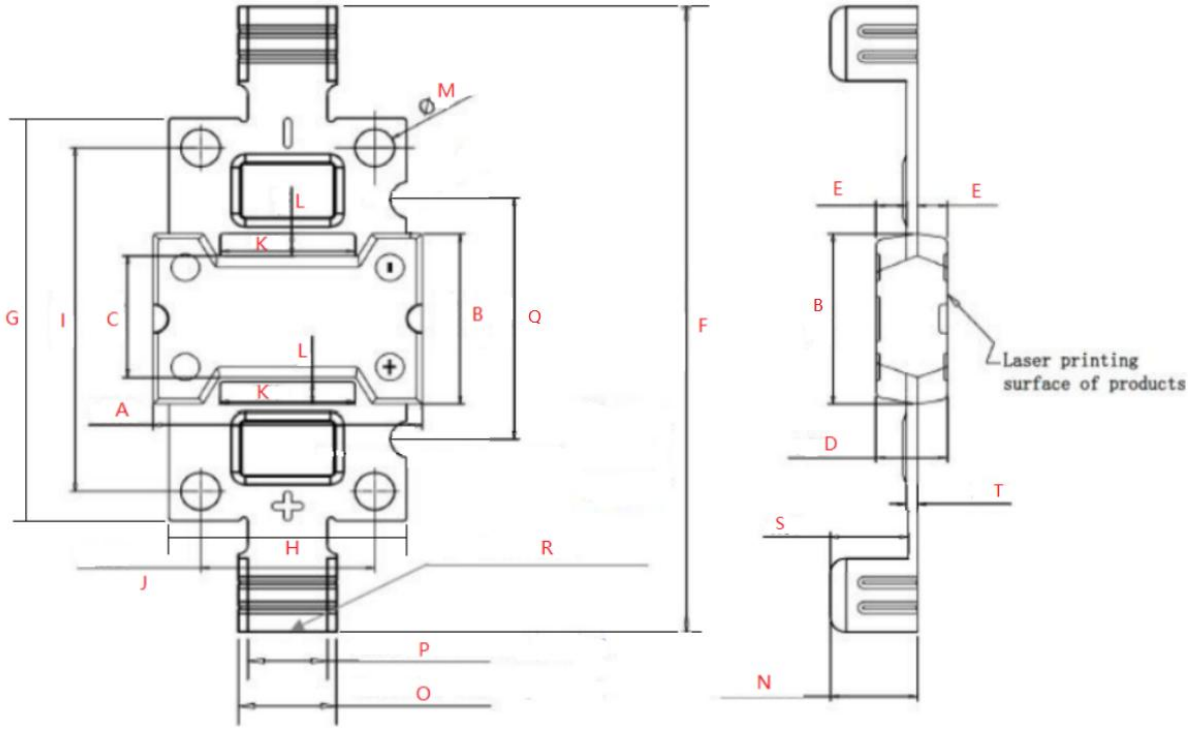

Symbol	Dimensions in millimeters		
	Min.	Typical	Max
A	16.90	17.00	17.10
B	11.38	11.48	11.58
C	8.15	8.20	8.25
D	4.40	4.50	4.60
E	1.85	1.90	1.95
F	41.90	42.00	42.10
G	26.90	27.00	27.10
H	14.90	15.00	15.60
I	22.90	23.00	23.10
J	10.90	11.00	11.10
K	-	8.50	-
L	-	1.50	-
M	-	⌀ 2.50	2.55
N	5.35	5.50	5.65
O	6.20	6.30	6.40
P	4.90	5.00	5.10
Q	15.95	16.00	16.05
R	2.80	2.90	3.00
S	4.75	4.80	4.85
T	0.67	0.70	0.73

Dimension H includes Burrs/cutting residuals.

Technical Data
Data Sheet N2692, Rev.-

RoHS

DISCLAIMER:
1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC Diode Solutions sales department for the latest version of the datasheet(s).
2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment , and safety equipment) , safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement .
3- In no event shall SMC Diode Solutions be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC Diode Solution assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
4- In no event shall SMC Diode Solutions be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC Diode Solutions.
6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC Diode Solutions.
7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

SMC:

3.0SMCJ22CA MBR40200WT MBR4080CT SDUR1040 SMBJ33CATR UG2KB100 MBRF10100CT STD20100CE MBR1550S MBRF2060CT 5.0SMCJ33A MBR30100 SF14G 83CNQ080 151CMQ045 183NQ100R-1 CESD24VD5 MB6F MBR60150CT MBRB10200CT S8ULCC36-2 SCT825B 5.0SMCJ60CA MMSZ5261B SDURD1030 SST24A-800BW STB60100C BZT52B5V1S S2M0120120K SDURB860A