PESD5V0L1BA

Transient Voltage Suppressors for ESD protection

DESCRIPTION

PESD5V0L1BA is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

This device has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD (electrostatic discharge), CDE (Cable Discharge Events),and EFT (electrical fast transients).

FEATURES

- ✧IEC61000-4-2 (ESD) ±15kV (air), ±8kV (contact)
- ✧IEC61000-4-4 (EFT) 40A (5/50ηs)
- ✧Peak power dissipation: 200W (8/20μs)
- ✧Protects one directional I/O line
- ✧Low clamping voltage
- ✧Working voltages : 5V
- ✧Low leakage current

MACHANICAL DATA

- ✧SOD-323 package
- ✧Terminals: Gold plated, solderable per MIL-STD-750, method 2026
- ✧Packaging: Tape and Reel
- ✧Reel size: 7 inch


ORDERING INFORMATION

- ✧Device: PESD5V0L1BA
- ✧Package: SOD-323
- ✧Material: Halogen free
- ✧Packing: Tape & Reel
- ✧Quantity per reel: 3,000pcs

APPLICATIONS

- ✧High Speed Line :USB1.0/2.0, VGA, DVI, SDI,
- ✧Serial and Parallel Ports
- ✧Notebooks, Desktops, Servers
- ✧Projection TV
- ✧Cellular handsets and accessories
- ✧Portable instrumentation
- ✧Peripherals

PIN CONFIGURATION

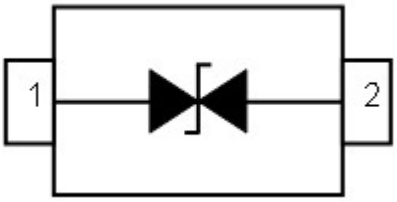

PACKAGE OUTLINE




ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Units
V_{ESD}	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	±15 ±8	kV
P_{PP}	Peak Pulse Power (8/20μs)	100	W
T_{OPT}	Operating Temperature	-40~150	°C
T_{STG}	Storage Temperature	-40~150	°C


ELECTRICAL CHARACTERISTICS (Tamb=25°C)

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V_{RWM}	Reverse Working Voltage				5.0	V
V_{BR}	Reverse Breakdown Voltage	I_T = 1mA	5.6		7.8	V
I_R	Reverse Leakage Current	V_{RWM} = 5V			1.0	μA
V_C	Clamping Voltage	I_{PP} = 5A, t_p = 8/20μs			11.6	V
V_C	Clamping Voltage	I_{PPmax} = 8A , t_p = 8/20μs			16.0	V
C_J	Junction Capacitance	V_R = 0V, f = 1MHz		10	15	pF

ELECTRICAL CHARACTERISTICS CURVE

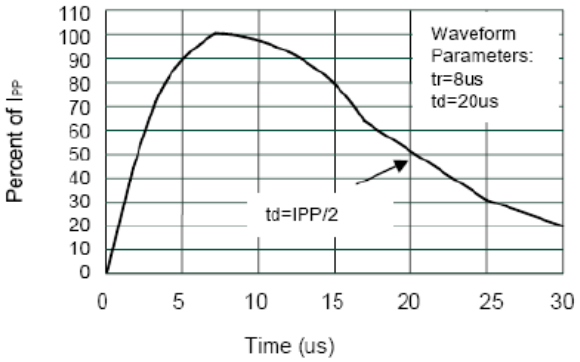


Pulse Waveform

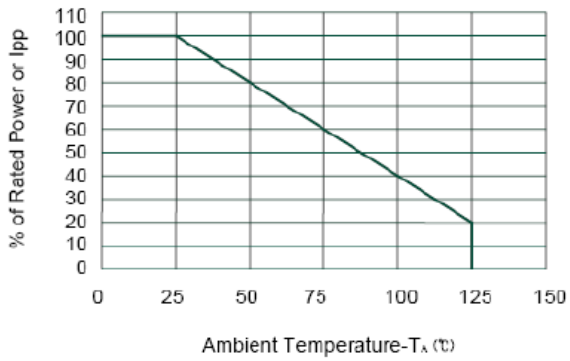


Power Derating Curve

SOD-323 PACKAGE OUTLINE DIMENSIONS

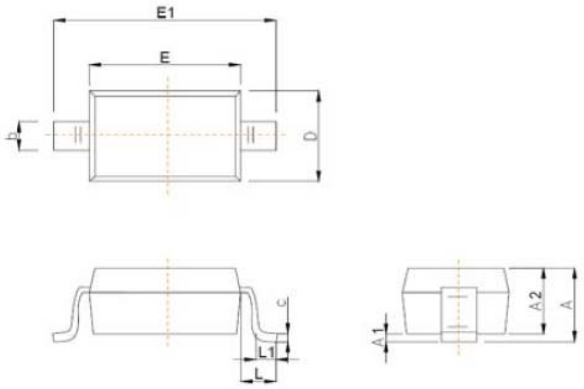

Symbol	Dimensions In Millimeters	
	Min	Max
A		1.00
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
e	1.800	2.040
L	0.475 REF	
L1	0.250	0.400
θ	0°	8°



Recommended Pad outline

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

KUU:

SD103AWS S4 LSMD050 LSMD150 MSMD050/24 SMDJ7.0A 1N60PW KNTC0603/10KF3950 SJD12C15L01 SMDJ7.5CA SMDJ9.0A WNM4002-3/TR 1N5819W S4 BV03C ESD05V32D-LC SMBJ17A ESD3V3D523-2U K1N5819HW-7-F MSMD150 SMBJ6.0CA SMDJ16A SMF15A SM712.TCT SMBJ160CA SMDJ8.5A MBR0540-7-F B340A ESD0301BU GBLC15CI KMOV0402E180C030T PESD12VS1UB