



RoHS

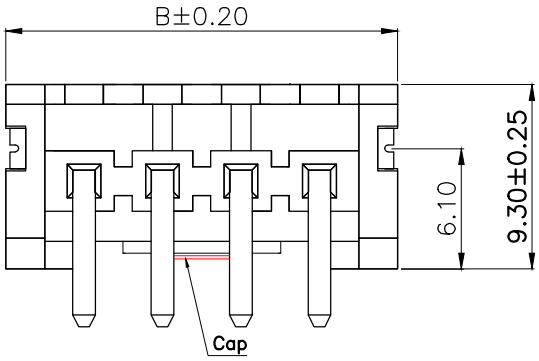

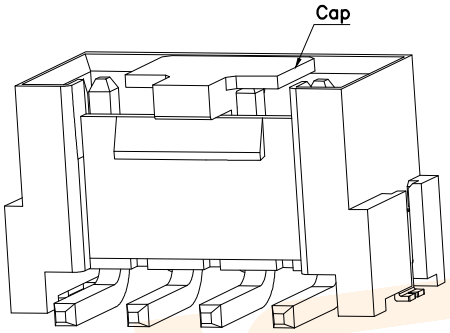


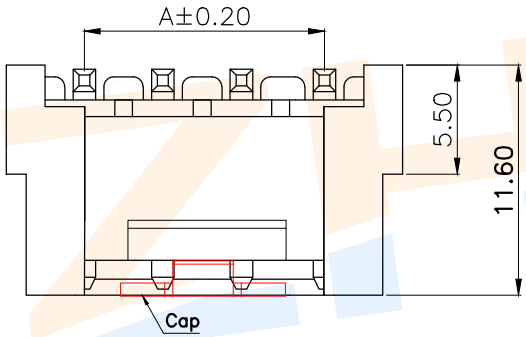


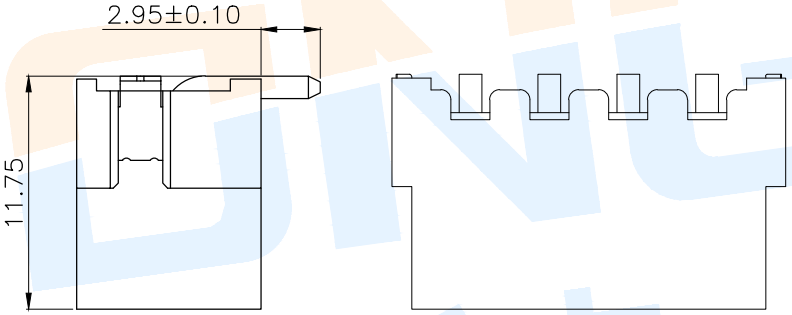


Model No.	Pin	A	B	C
WAFER-VH3.96-2PLT-W1	2	3.96	11.85	8.60
WAFER-VH3.96-3PLT-W1	3	7.92	15.81	12.56
WAFER-VH3.96-4PLT-W1	4	11.88	19.77	16.52
WAFER-VH3.96-5PLT-W1	5	15.84	23.73	20.48
WAFER-VH3.96-6PLT-W1	6	19.80	27.69	24.44
WAFER-VH3.96-7PLT-W1	7	23.76	31.65	28.40
WAFER-VH3.96-8PLT-W1	8	27.72	35.61	32.36
WAFER-VH3.96-9PLT-W1	9	31.68	39.57	36.32
WAFER-VH3.96-10PLT-W1	10	35.64	43.53	40.28
WAFER-VH3.96-11PLT-W1	11	39.60	47.49	44.24
WAFER-VH3.96-12PLT-W1	12	43.56	51.45	48.20
WAFER-VH3.96-13PLT-W1	13	47.52	55.41	52.16
WAFER-VH3.96-14PLT-W1	14	51.48	59.37	56.12

WAFER-VH3.96-□□PLT-W1(-P=盘装,非盘装不启用)

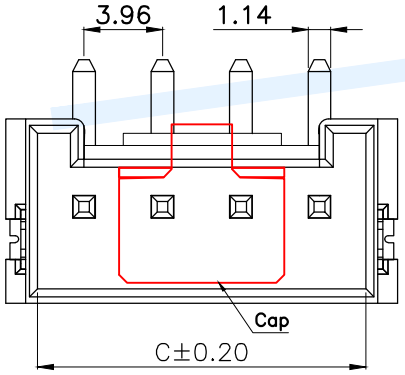

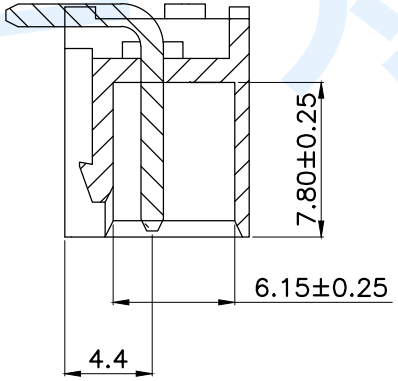

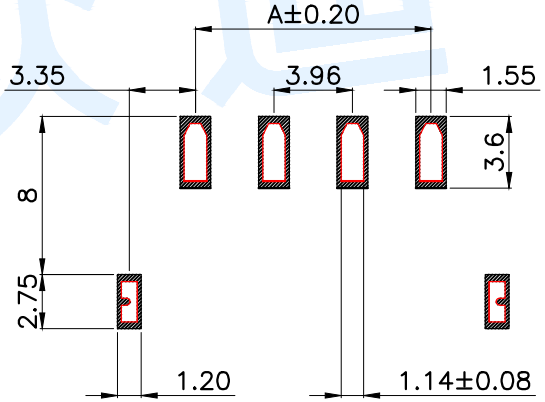

适用线路板(PCB LAYOUT)

Specifications/技术规格:

1.Poles/线数：2～14P
2.Wire range/适用线规：AGW 22#～18#
3.Applicable PC board thickness/ 适用PC板厚度：1.6mm
4.Current rating/额定电流：7.0A
5.Voltage rating/额定电压：250V DC/AC
6.Insulation Resistance/绝缘电阻：1000MΩ Min
7.Dielectric Withstanding/ 耐电压：1500V AC/minute
8.Contact Resistance/ 接触电阻：20mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃

NO.	Name	Number	Qty	Materil	Remarks
Ⓒ	Soldering lug		1	Brass	Plating Sn
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	LCP	Off White

Zhongdi Electronic Technology Co., Ltd

								angle	±2°		design		date		name	WAFER CONNECTOR	
								10~30	±0.30		Review		date				
								5~10	±0.20		Approved		date		model	WAFER-VH3.96-□□PLT-W1	
								~ 5	±0.10	Drawing number:							
				modify		Review		Approved	Tolerance not specified	Proportion	1:1	unit	mm	gape number		A4	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-MX1.25-4PWZ-C22-9T WAFER-SH1.0-11PLT-W1-P WAFER-SHB1.0-13PLT-W1-P
WAFER-VH3.96-3PWT-W1-P WAFER-HY2.0-7PWT-W1-P WAFER-MX1.25-2PWZ-C22-9T
WAFER-SH1.0-8PWT-W1-P WAFER-XH2.54-12PWT-W1-P WAFER-ZH1.5-12PWT-W1-P
WAFER-ZH1.5-4PLT-W1-P WAFER-HY2.0-4PWT-W1-P WAFER-SUR0.8-12PWT-W1-P
WAFER-XHB2.54-7PWT-W1-P WAFER-GH1.25-12PLT-W1-P WAFER-MX1.25-5PLT-W1-P
WAFER-MX1.25-5PZZ-C22-9T WAFER-SH1.0-6PWT-W1-P WAFER-VH3.96-5PWT-W1-P
WAFER-HY2.0-10PWT-W1-P WAFER-HY2.0-6PLT-W1-P WAFER-SUR0.8-4PLT-W1-P
WAFER-ZH1.5-2PLT-W1-P WAFER-ZH1.5-2PWT-W1-P WAFER-PH2.0-2PWT-W1-P
WAFER-TJC8-2.54-12PZZ WAFER-SHB1.0-8PWT-W1-P WAFER-SUR0.8-14PWT-W1-P
WAFER-GH1.25-14PWT-W1-P WAFER-HY2.0-6PWT-W1-P WAFER-TJC8-2.54-2PWZ