
Midget Twist-Lock® Devices
15A, 125V AC, 2 Pole, 3 Wire Grounding
Flanged Receptacle

HUBBELL






Features
- Stainless Steel mounting flange
- High heat resistant phenolic base

Ordering Information

Description	Terminals	UPC	Catalog Number
Stainless steel flanged receptacle.	Covered	783585237831	HBL7598

Listings
Listed to UL 498
Certified to CSA C22.2 No.42

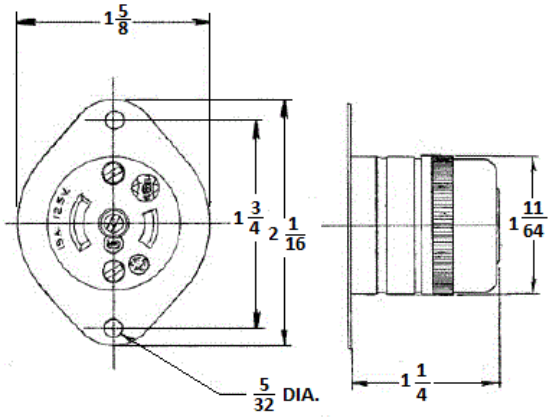

Specifications

Flange	Stainless Steel
Base	Phenolic
Contacts	Brass
Terminal Screws	#5-40 Brass

Performance

Electrical

Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum

Mechanical

Terminal Accommodation	#18 AWG - #14 AWG solid or stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498

Environmental

Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C; Minimum -40°C (w/o impact)

Accessories

Valise® Plug	HBL7594V
Plug	HBL7594
Angled Plug	HBL7570

Resources
Customer Use Drawing
eCatalog

Dimensions in Inches (mm)

HUBBELL® Wiring Device-Kellems

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HUBBELL:

HBL2610AR HBL2831 NP1LA HBL360P6W HBL7484 SHC1022 HBL2836 HBL3100RS1WR HBL4720C SEC75GA 073031211 B2100 HBL20418 SHC1034 CS8464C HBL2321 HBL2423 HBL2711 HBL5100PS1W HBL7594 CS8164C HBL2410SW HBL8013V HBL3331C SHC1015 HBL4586 HBL5366C HBL5669C HBL9450A SHC1059