
Rocker Switch | **SRA1-1H-DC-1-NN**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

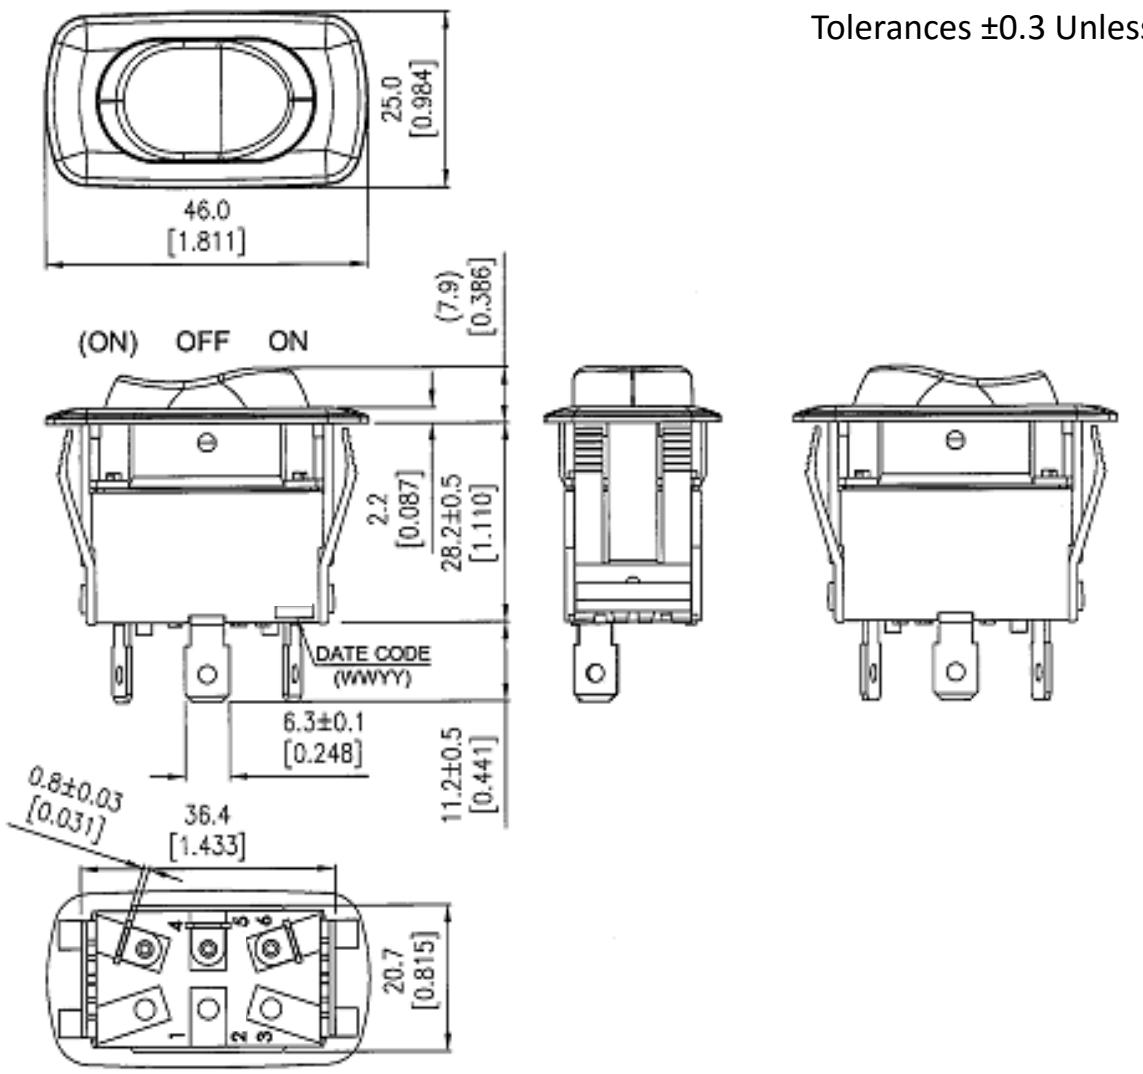


Mounting Hole

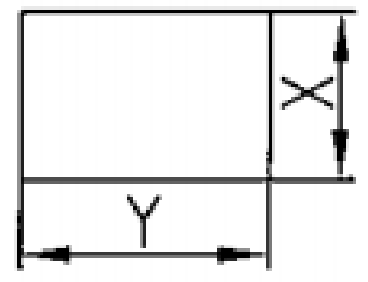

Thickness	X	Y
0.75~1.25	21.2+0.1	36.6+0.1
1.25~2	21.2+0.1	36.8+0.1
2~3	21.2+0.1	37.0+0.1

Circuit Diagram

3P SPDT (ON)-OFF-ON

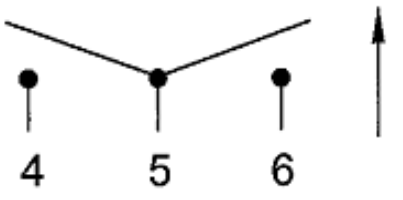

Electrical Specifications

Rating	21A 14V DC, 10A 28V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°C~85°C

Material Specifications

Frame	Black, Nylon 66
Actuator	Black, Nylon 66
Waterproof	IP56

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

PB-1A-DC-2-B SB-1B-DC-3-B SRB1-1G-DC-1-NN SRD2-2F-DC-1-RNN TE3-1A-DC-1-AL SB-1B-DC-3-R SC-B TB1-2H-DC-6 TC6-P1-Z RA4-2A-DC-2-AL SRD2-2F-DC-1-BNN TA2-1G-DC-6-O RD2-1A-DC-1-AL RG3-1A-DC-1-B SRA1-1A-DC-1-NN-2 SRD1-2A-DC-1-BGN TA2-1A-DC-5 RF1-1A-DC-2-B-3 PB-1A-DC-2-RDL PD-1E-DC-9-UL RC-1A-DC-1-AL RF3-1A-DC-2-GL SRC1-1B-DC-1-B TA1-1A-DC-4 TE1-1F-DC-1-PB WR1 PB-1B-DC-2-RIL SRA1-2F-DC-1-NN SRD2-1G-DC-1-BNN TE6-1A-DC-1-UL