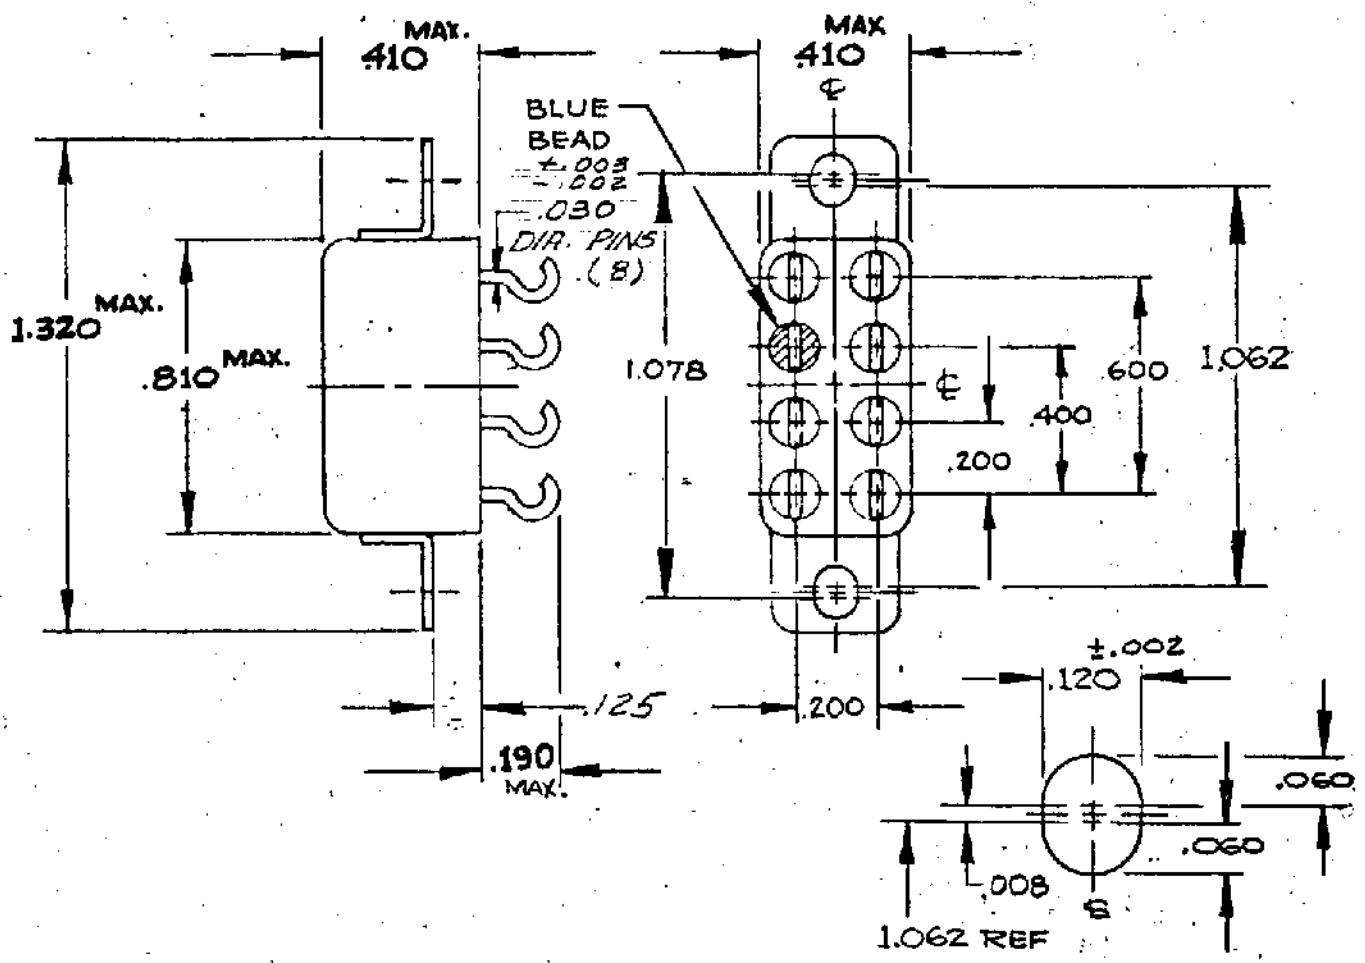


COIL: @ 25° C

RESISTANCE 160 OHMS ± 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 6.0 VDC

MUST RELEASE .7 - 4.0 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS AT 30 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

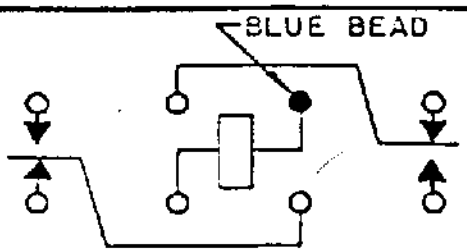

CONTACT RATING: LOW LEVEL TO 2 A @ 28 VDC /10000 OPERATIONS

DRB-18-86 JMB | CK.

Communications Instruments, Inc.

CUST. QPL

CUST. NO. 39016/6-111 L

TYPE HFW RELAY

HFW1130G01

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

RH73H2A40MKTN 3-1393225-0 3631B101LL 1-794222-0 1969656-1 U5254-000005-030PA 175977-2
1903112-2 2380312-2 650075-000 SBCHE154R7K SMW73R0JT 1393431-1 2005330-1 TE50BR39J
CRGCQ2010J3K3 MPT100C18RF SBCHE64R7K 141991-2 1743455-2 2310537-1 2834055-1 936348-1
3430B2F51RTDF 917696-1 CPF0402B37K4E1 2377783-2 ROX05SJ18R 1-962915-1 2-292161-3