

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.1.3	阿树

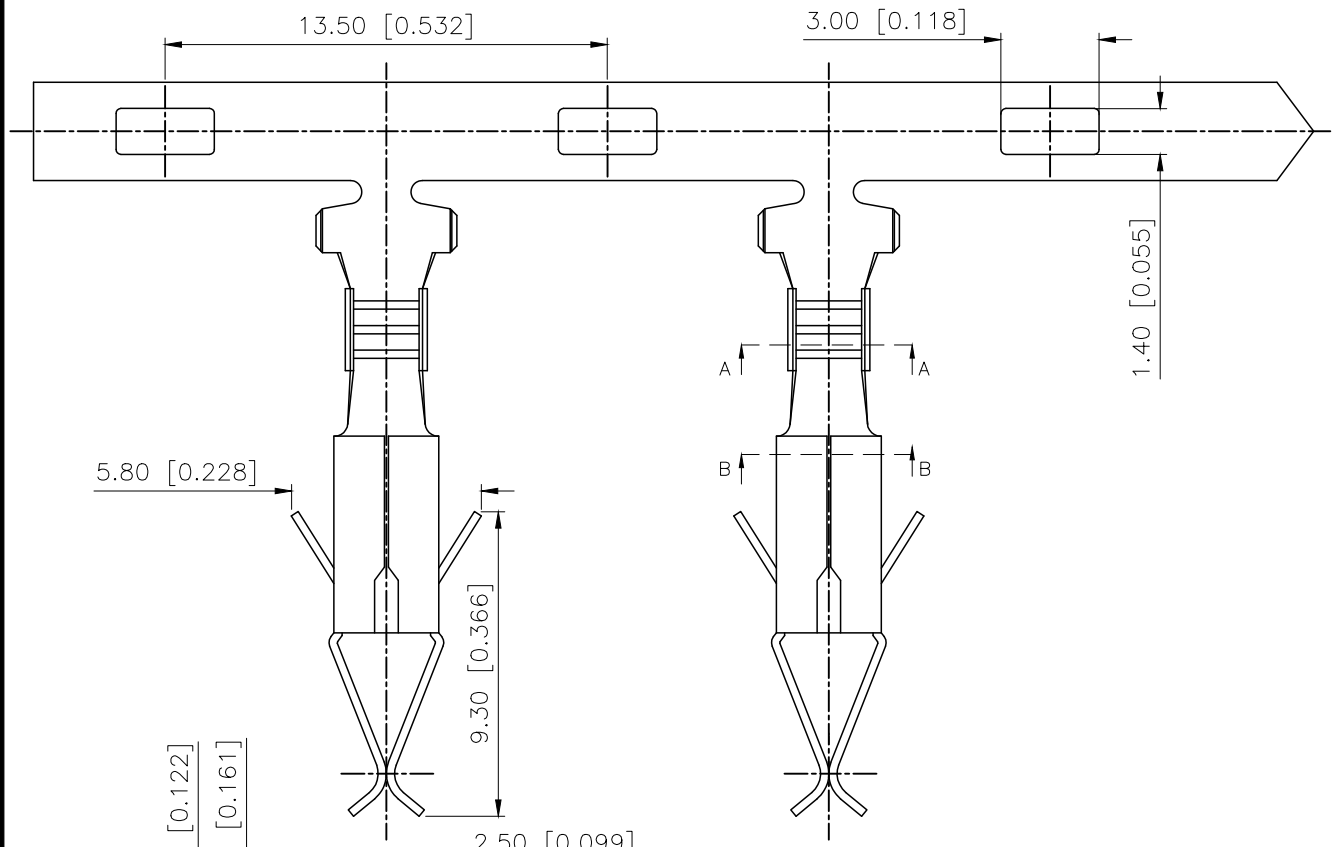

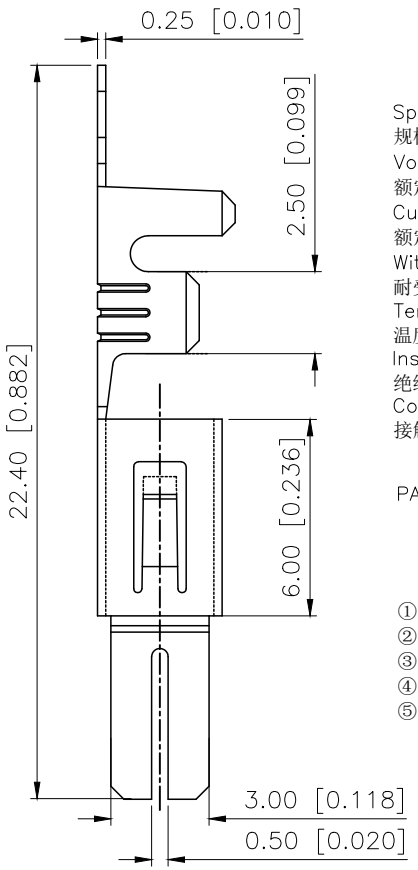

Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:5A AC/DC
额定电流：5A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压：1000V AC/分钟
Temperature range:-40℃-+125℃
温度范围：-40℃-+125℃
Insulation resistance:500MΩ min
绝缘电阻：500MΩ Min
Contact resistance:20mΩ Max
接触电阻：20mΩ Max

PART NO.:

K 602002 T-P SN
① ② ③ ④ ⑤

①K:XKBTEK-Car Connector
②XKB Series No
③Category:T-Terminal
④Material:P-Phosphor Bronze
⑤Plating:SN-Plating Tin

K602002T-PSN	Phosphor Bronze	AWG#20~16	K602202H
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection 星坤

DESIGN	阿树	VIEW:	MODEL TYPE: 6.0mm Automobile connector
CHECKED		UNIT: mm/in	PART NO.: K602002T-PSN
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XKB Connection:

DS-10BLP X0825WT7BL1 X4611WRS-19I-C40D28 U263-241N-4BQC15 X0400WVS-12-LPV01 X6511WVS-18H-C60D48-R1 X8821WVS-04L-LPSN X05A26H20G X0811FVS-80BS-LPV01 X1304WVS-52B-LPV01 TS-1101VS-C-A-B X05A10L20G U263-161N-5BQC10-1 X05A10L10G TM-007-D1-A-04 X1002WRS-04B-9TSN X1321WVS-2x25J-C40D53 X2026WV-2x03-N0SN X4611WR-01I-C40D28 X2011WR-04A-N0SN X5521FR-2x02-C70D32-1743 DC-030CH-SMT TS-1102SD-A-R-R X05A26H35G X1011H-2x25-N0HF X1502WV-08K-N0SN X0502WVS-20D1S-LPSN X9812WVS-2x15-6TV01 XKSIM-004 DC-044AE-2.0