
© 2017 TE Connectivity Ltd. family of companies. All Rights Reserved

HARNESSING

HEAT SHRINK BOOTS

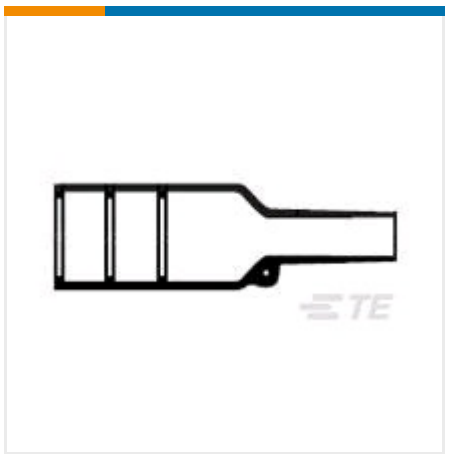

✔ Active

TE CONNECTIVITY (TE)

202K153-3-01-0

Raychem | CAP , CRPS

202K153-3-01-0
TE Internal Number: 822520-000
Alias ID: 6-1196414-3

EU RoHS Compliant
EU ELV Compliant

Lipped Yes

Operating Temperature Range (°C) -55 – 135

Fluid/Chemical Resistance Suitable for occasional exposure to fluids

Adhesive Options S1006 Separate Adhesive, -55°C – 135°C (-67°F – 275°F), S1017 Separate Adhesive, -20°C – 60°C (-4°F – 140°F), S1030 Separate Adhesive, -80°C – 80°C (-112°F – 176°F), S1048 Separate Adhesive, -55°C – 105°C (-67°F – 221°F), S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F)

Material Systems Code 10

PRODUCT DRAWING
English

DOCUMENTATION

Product Drawings

Boot Straight With Lip
PDF
English

Boot, Straight With Lip
PDF **(TIFF AVAILABLE)**
English

Product Specifications

Product Specification

Thermofit Polyolefin Molded Components Flame-Retarded, Semi-Rigid, Heat-Shrinkable

Downloaded from Arrow.com.

PDF

English

Product Environmental Compliance

Safety Data Sheet

EPS Heat Shrinkable Polymeric Products

PDF

French

EPS Heat Shrinkable Polymeric Products

PDF

Italian

EPS Heat Shrinkable Polymeric Products

PDF

Dutch

EPS Heat Shrinkable Polymeric Products

PDF

Danish

EPS Heat Shrinkable Polymeric Products

PDF

English

EPS Heat Shrinkable Polymeric Products

PDF

German

EPS Heat Shrinkable Polymeric Products

PDF

Norwegian

EPS Heat Shrinkable Polymeric Products

PDF

Spanish

EPS Heat Shrinkable Polymeric Products

PDF

Swedish

FEATURES

Please review product documents or contact us for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Type Molded Boot

Configuration Features

Lipped Yes

Downloaded from Arrow.com.

Body Features

Material Systems Code 10
Adhesive Pre-Coat No
Entry Size (Braided or Magneform Adapter) 12, 13, 14, 15
Entry Size (Solid or Fixed Adapter) 8
Entry Size (Spin Coupling Adapter) 12
Entry Size (Tinel-Lock Adapter) 10, 12, 14
Material Modified Polyolefin

Dimensions

Cable Diameter Range 8.4 – 19 mm [.331 – .748 in]
Wire/Cable Outside Diameter .35 in, .39 in, .43 in, .433 in, .47 in, .55 in, .63 in, 10 mm, 11 mm, 12 mm, 14 mm, 16 mm, 9 mm

Usage Conditions

Operating Temperature Range (°C) -55 – 135

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No
Approved Standards BS-G-198-5-DA, DEF Std 59-97 Issue 3 Type DA, SAE AS I 81765/1, Type I, UL 224, File E85381

Other

Fluid/Chemical Resistance Suitable for occasional exposure to fluids
Adhesive Options S1006 Separate Adhesive, -55°C – 135°C (-67°F – 275°F), S1017 Separate Adhesive, -20°C – 60°C (-4°F – 140°F), S1030 Separate Adhesive, -80°C – 80°C (-112°F – 176°F), S1048 Separate Adhesive, -55°C – 105°C (-67°F – 221°F), S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F)
Adhesive Type Adhesive Purchased Separately

PRODUCT COMPLIANCE

Statement of Compliance

Statement of Compliance
PDF

Downloaded from Arrow.com.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2005330-1 282680-1 354022KFT U5254-000005-030PA HT-CT-50M-1-OUT-0 ROX05SJ18R 1-962915-1 175977-2 2310537-1 2380312-2 CPF0402B37K4E1 SBCHE64R7K TE50BR39J 917688-1 1903112-2 292206-2 3-1447221-5 MPT100C18RF SBCHE154R7K 1393454-9 170376-2 SMV1W220KJT T4133012081-000 2-520263-2 3631B101LL HSHC4508K2J RH73H2A40MKTN 2-521104-2 2098557-4 1897725-2