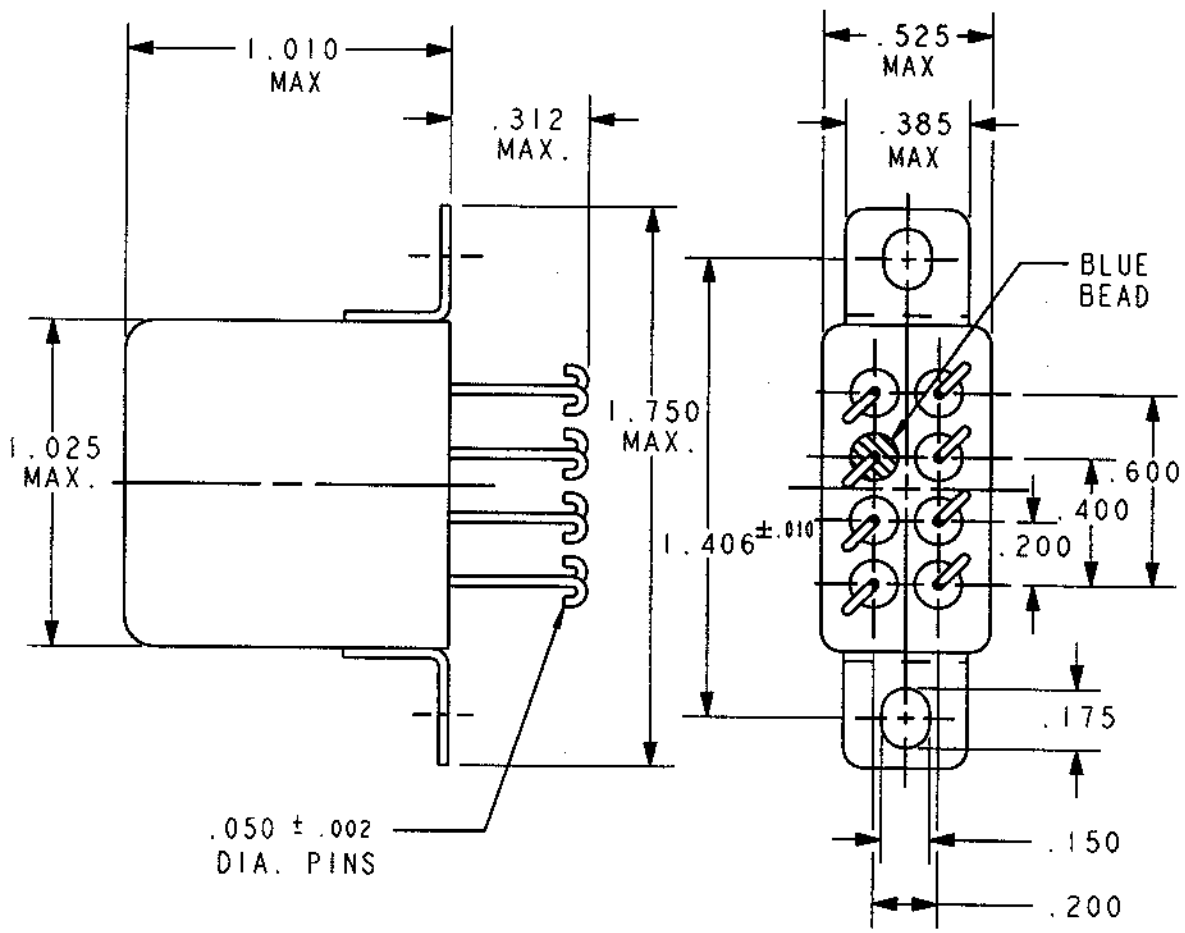


REV. 6
DCO 102710

COIL: @ 25°C

RESISTANCE 300 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.0 VDC

MUST RELEASE 2.3 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 15 MS MAX.
OPERATE BOUNCE 5 MS MAX.
RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

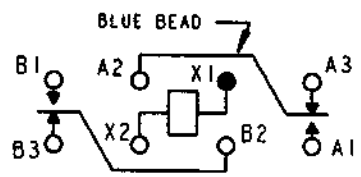

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC
5 AMPS 115 VAC/400 Hz RESISTIVE
50,000 OPERATIONS

DR. BSH 8/17/01 CK. TLG 8-17-01

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/23-002 REV.

"07" RELAY

B07D992BZ2-0050

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1743455-2 2380312-2 3631B101LL 2005330-1 CRGCQ2010J3K3 MPT100C18RF SBCHE154R7K
1-962915-1 1393431-1 141991-2 1969656-1 SMW73R0JT 1903112-2 917696-1 936348-1 SBCHE64R7K
1-794222-0 3430B2F51RTDF ROX05SJ18R 2310537-1 2377783-2 RH73H2A40MKTN 2-292161-3
2834055-1 650075-000 CPF0402B37K4E1 TE50BR39J U5254-000005-030PA 175977-2 3-1393225-0