


ROHS








3D VIEW

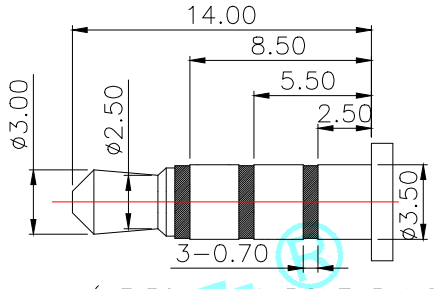



(ø3.50mm 4 POLE PLUG)

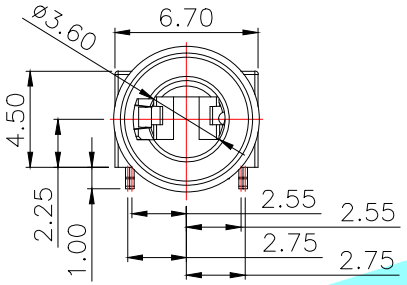

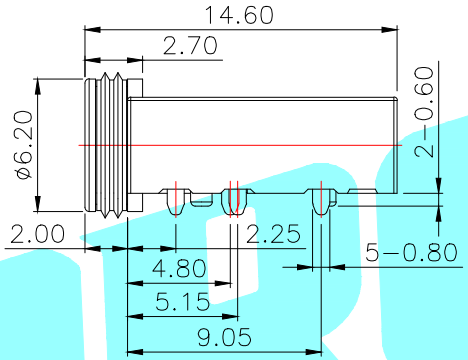

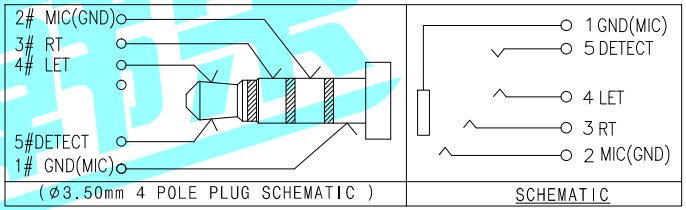



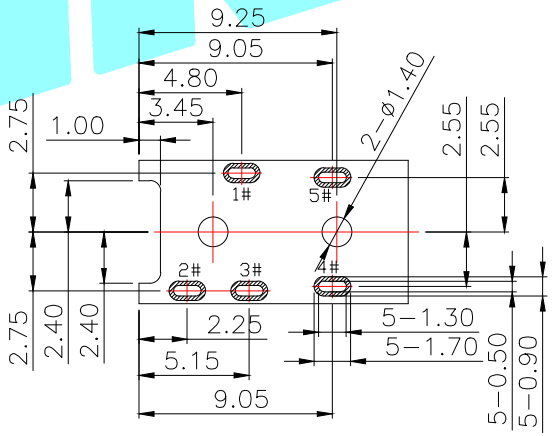

P.C.B LAYOUT(TOP view)

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IPX7;

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Waterproof ring	——	1	Silica gel	——	——
②	Terminal	——	5	Phosphor bronze/SUS	Ni Plating	——
①	Housing	——	1	HTP	Black	——

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD	
DRAWN	LIUCAN	2021.09.13		
CHECKED			TITLE:	PHONE JACKES
APPROVALS			PART NO.	PJ-621C
TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~ 5 ±0.10; ANGLE ±2°			UNIT: mm	SCALE: 1:1
			DRAWING NO.	——
			PROJ:	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HRO:

U-F-M5DD-W-L U-F-M5DD-Y-L DQ-03BP K3-1346S-F1 SIM-08A SS-22D03-G4 U-C-M5DW-W-1 DC-031A-10A K2-1102DP-G4SW-04 PJ-3250-5A U-F-M5SS-W-5 K2-1102AT-A4CW-01 K2-1102SP-K4SC-04 ES-07KP K8-5851D-L1 U-F-M5DD-Y-L1 DA-10RP DS-01BP K2-1102BG-I4CW-01 K2-1102DP-S3SW-04 PJ-399B-6A K2-1102SP-A5SC-04 K3-2258S-E1 K5-1617SA-01 TYPE-C-31-M-04 U-C-M5SS-Y-1 U-F-M5DS-Y-1 U-M-M5DD-W-2 K2-1101DF-A4DW-01 K2-1818DP-A3SW-01