
ESD119B1W01005E6327XTSA1

1-Line Ultra Low Capacitance Bi-directional TVS Diode


Features

- Ultra small package: 0.6x0.3x0.3mm
- Ultra low capacitance: 0.25pF typical
- Ultra low leakage: nA level
- Low operating voltage: 5V
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test
    - Air discharge: ±20kV
    - Contact discharge: ±20kV
  - IEC61000-4-4 (EFT) 40A (5/50ns)
  - IEC61000-4-5 (Lightning) 5A (8/20μs)
- RoHS Compliant

Dimensions DFN0603



Pin Configuration

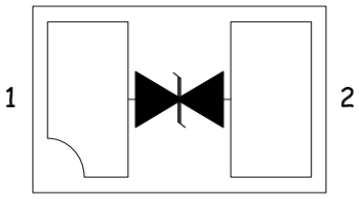

Applications

- Cellular Handsets and Accessories
- Display Ports
- MDDI Ports
- USB Ports
- Digital Visual Interface (DVI)
- PCI Express and Serial SATA Ports

Mechanical Characteristics

- Package: DFN0603
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel:10,000pcs
- Reel Size:7 inch
- Device Marking: ZZ


Absolute Maximum Ratings(Tamb=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	Ppp	125	W
ESD per IEC 61000−4−2 (Air)	V_{ESD}	±20	Kv
ESD per IEC 61000−4−2 (Contact)		±20	
Operating Temperature Range	T_J	-55 to +125	℃
Storage Temperature Range	T_{STJ}	-55 to +150	℃


Electrical Characteristics(TA=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				5	V
Breakdown Voltage	V_{BR}	I_T = 1mA	6.5		9.5	V
Reverse Leakage Current	I_R	V_{RWM} = 5V			0.2	μA
Clamping Voltage	V_C	I_{PP} = 1A (8 x 20 μs pulse)			12	V
Clamping Voltage	V_C	I_{PP} = 5A (8 x 20 μs pulse)			25	V
Junction Capacitance	C_J	V_R = 0V, f = 1MHz		0.26		pF


Typical Performance Characteristics (T_A=25°C unless otherwise Specified)

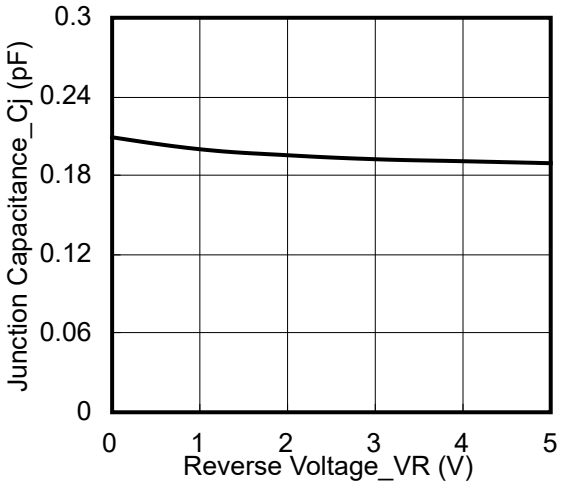


Junction Capacitance vs. Reverse Voltage

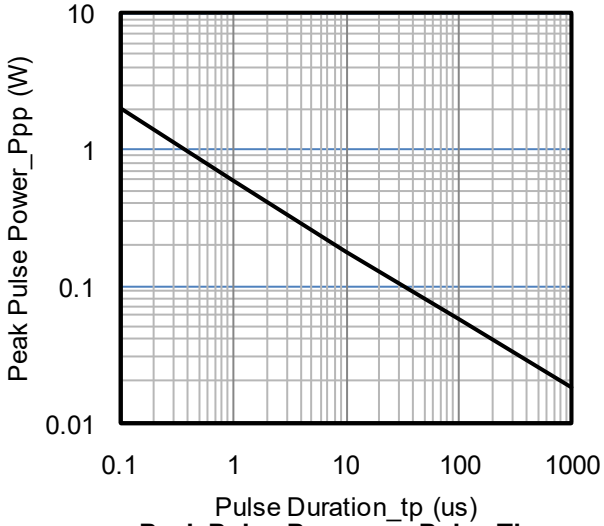


Peak Pulse Power vs. Pulse Time

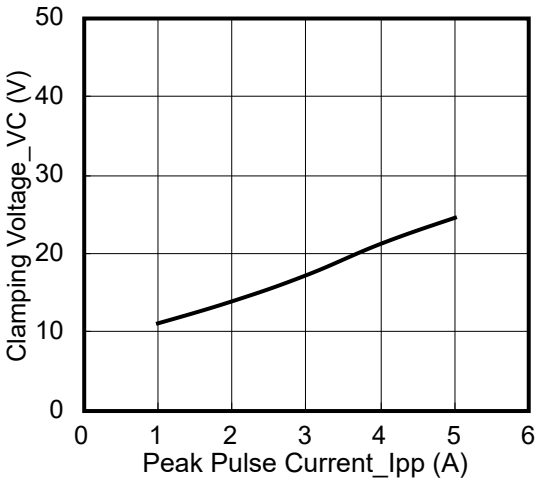


Clamping Voltage vs. Peak Pulse Current

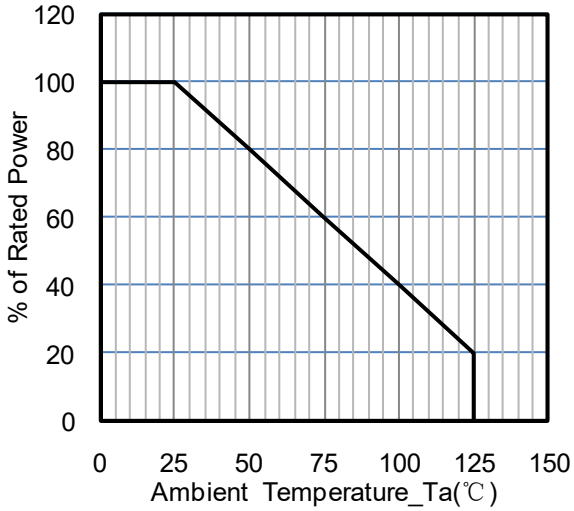

Power Derating Curve

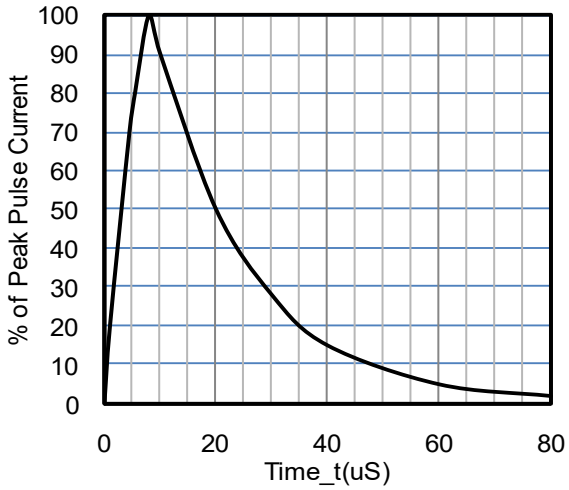


8 X 20uS Pulse Waveform

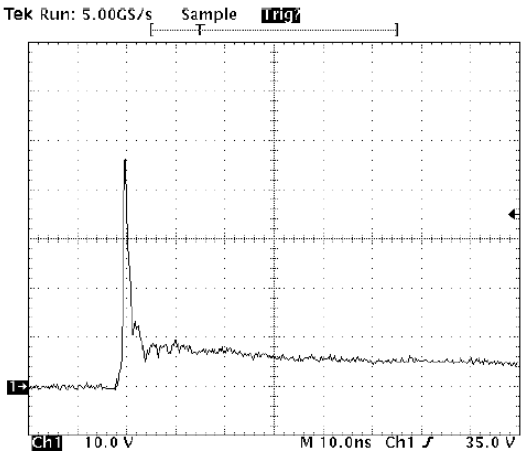

ESD Clamping Voltage


8 kV Contact per IEC61000−4−2

DFN0603 **PACKAGE OUTLINE & DIMENSIONS**

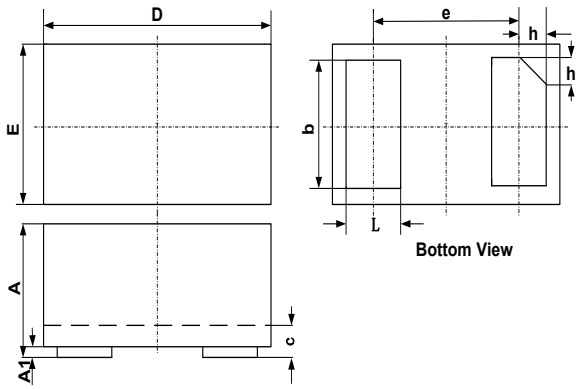

SYM	DIMENSIONS		
	MILLIMETERS		
	MIN	NOM	MAX
A	0.230		0.330
A1	0.000	0.020	0.050
b	0.215	0.245	0.275
c	0.120	0.150	0.180
D	0.550	0.600	0.650
e	0.355 BSC		
E	0.250	0.300	0.350
L	0.160	0.190	0.220
h	0.079 BSC		

Suggested Land Pattern

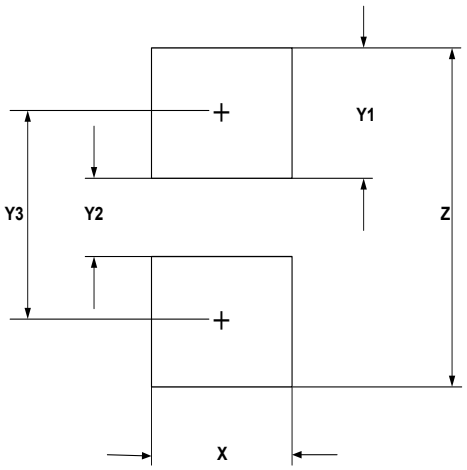

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
X	0.30	0.012
Y1	0.25	0.010
Y2	0.15	0.006
Y3	0.40	0.016
Z	0.65	0.026

Shanghai Leiditech Electronic Co.,Ltd
Email: sale1@leiditech.com
Tel : +86- 021 50828806
Fax : +86- 021 50477059

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Leiditech:

LC24CI P4KE480CA SDA1211CDN SE10F10B3.3A SM8S26A P4KE120A P4KE130A S3301TE
TPD1E1B04DPYR-TP 1.5KE510A NVTR4502P PESD36VS2UT ULC0521C ULC0524BLC LC0534N
PS03CBUL2 STL45N10F7AG 1.5KE9.1CA 5KP9.0A CM1213-08MR P4KE170CA P4KE43CA
P4SMFJ24CA SD33CW TPAOZ8804ADI 5.0SMDJ110CA HY05U-523 LMTL5P02 SMS24C L35L5V0CB2