


REV	DRC26-60S**
A	

REVISIONS

SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. P16250	10/1/99	R.D.R.
A	REVISED PER E.O. P19912	6/20/08	

DRC26-60S01 DRC26-60S02 DRC26-60S03 DRC26-60S04 DRC26-60S05

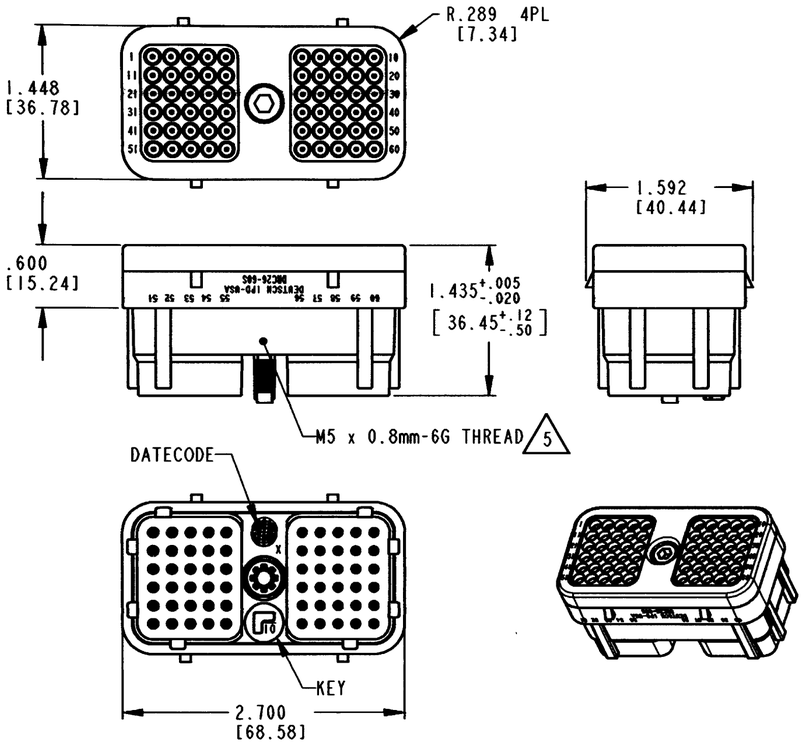

DRC26-60S06 DRC26-60S07 DRC26-60S08 DRC26-60S09 DRC26-60S10



8. MATERIAL: HOUSING: PLASTIC (BLACK); BOLT: SS STEEL; CLIP: STEEL
GROMMET: RUBBER

7. THIS PLUG MATES WITH 0944328L**-**** RECEPTACLE.
(** = KEY ARRANGEMENT; **** = ALL MODIFICATIONS)

6. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.

5. RECOMMENDED RETAINING BOLT TORQUE: 25-28 IN-LB [2.82-3.16Nm]

4. THIS CONNECTOR WILL ACCOMODATE THE FOLLOWING:

CONTACT SIZE	MIN. O.D.	MAX. O.D.	WIRE GAUGE RANGE
20	.040 [1.016]	.095 [2.413]	16 THRU 20 [1.00-0.50mm^2]

3. PLUG IS SUPPLIED WITH DUST CAP. (NOT SHOWN)

2. DIMENSION TOLERANCE: ±.025 [.64]

NOTES: 1. DIMENSIONS ARE IN INCHES [mm].

	SIGNATURE & DATE
DR	D. MEYER 09/10/99
CHK	6/20/08
PE	6/17/08
APPD	6/17/08
SCALE	NONE WT

PLUG
60 CONTACTS
SIZE 20
DRC SERIES

ENVELOPE

EP 075 | MATL. CODE

DEUTSCH INDUSTRIAL
3850 INDUSTRIAL AVE.
HEMET, CA 92545

B | DRC26-60S**

DWG SIZE | CODE 11139 | SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

DRC26-60S07