
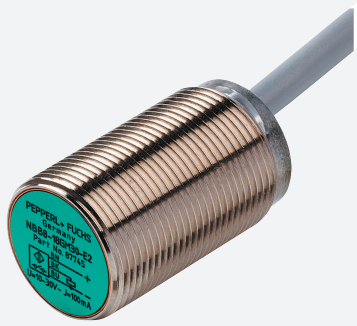


Inductive sensor

NBB8-18GM30-E2

- Basic series
- 8 mm flush
- Increased operating distance

Dimensions



Technical Data


General specifications		
Switching function		Normally open (NO)
Output type		PNP
Rated operating distance	s_n	8 mm
Installation		flush
Output polarity		DC
Assured operating distance	s_a	0 ... 6.48 mm
Reduction factor r_{Al}		0.45
Reduction factor r_{Cu}		0.4
Reduction factor r_{304}		0.7
Output type		3-wire
Nominal ratings		
Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 500 Hz
Hysteresis	H	typ. 5%
Reverse polarity protection		reverse polarity protected

Release date: 2020-03-20 Date of issue: 2020-03-30 Filename: 087745_eng.pdf

Technical Data

Short-circuit protection		pulsing
Voltage drop	U_d	≤ 3 V
Operating current	I_L	0 ... 100 mA
Off-state current	I_r	0 ... 0.5 mA typ. 0.1 µA at 25 °C
No-load supply current	I_0	≤ 15 mA
Time delay before availability	t_v	≤ 20 ms
Switching state indicator		LED, yellow
Functional safety related parameters		
$MTTF_d$		2090 a
Mission Time (T_M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
Standards		EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CSA approval		cCSAus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		cable PVC , 2 m
Core cross-section		0.34 mm^2
Housing material		brass, nickel-plated
Sensing face		PBT
Degree of protection		IP67
Cable		
Cable diameter		4.6 mm ± 0.2 mm
Bending radius		> 10 x cable diameter

Connection



Accessories

	**BF 18**	Mounting flange, 18 mm
	**EXG-18**	Quick mounting bracket with dead stop

Release date: 2020-03-20 Date of issue: 2020-03-30 Filename: 087745_eng.pdf

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

PEPPERL+FUCHS:

114642 GLV30-8-2500/47/73C KLR-C02-2,2-2,0-K70 NBB4-12GM50-A2-V1 OBR12M-R100-2EP-IO-V31-L OQT150-R100-2EP-IO-V31-L NBB2-12GM50-E2 MH4-2057 NBB2-8GM40-E0-V1 24772 CCN15-30GS60-E2-V1 OBD450-18GK40A-E2 OBR5000-18GK40A-E2 UB800-18GM40-I-V1 BF18 NBB0.8-4M25-E0 NBB5-18GM50-E2 UB2000-F42-E6-V15 134143 NBB1-4GM22-E2 OBR2500-12GM40-E5 OQT150-R101-2EP-IO-V31 UBE800-F77-SE2-V31 WCS3-MH1 NBB2-12GM50-A2-V1 34441 NBB0.8-5GM25-E2 NBB5-18GM50-A0 NBB8-18GM50-E0 S1SD-1AI-1U.1