
SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: 0–2 GHz
WORKING VOLTAGE: 335 Vrms
INSULATION RESISTANCE: 5k M ohms min.
TEMPERATURE RANGE: –65°C TO +165°C

PART NO. **RFE-6110**

REV	DESCRIPTION	DWN	DATE	APPROVED
–	ENGINEERING RELEASE	CZS	02/29/08	JDMc

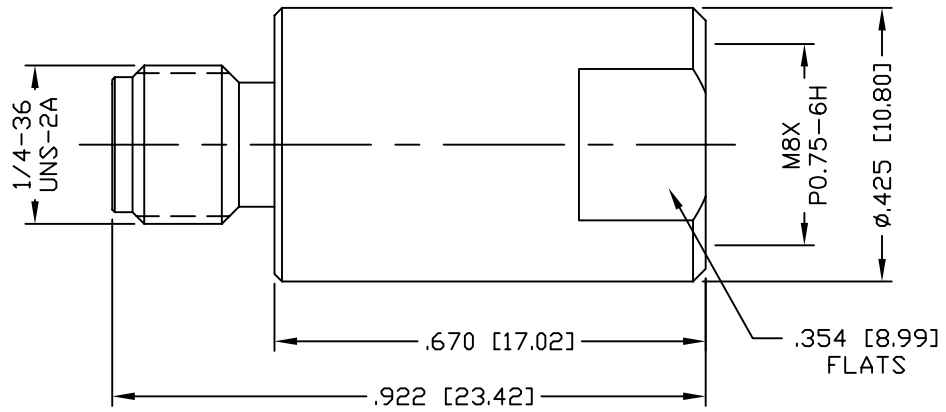

#	DESCRIPTION	QTY	MATERIAL	FINISH
1	BODY	1	BRASS	NICKEL, 100μ"
2	INSULATOR	1	PTFE	---
3	CONTACT	1	PHOS BRONZE	GOLD, 3μ"
4	LOCK RING	1	BRASS	NICKEL, 100μ"
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				

CUSTOMER OUTLINE DRWING

ALL DIMENSIONS ARE REFERENCE ONLY

APPROVALS	DATE
DRAWN C. ZUNIGA	02/29/08
CHECKED	
ORJ DRAWN C. ZUNIGA	02/29/08

RoHS COMPLIANT

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RF connectors
DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549–6340
(858) 549–6345 FAX

SMA JACK TO FME PLUG ADAPTER

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RFE-6110	—

SCALE:	ENGINEERING ID	SHEET
NTS	008974	1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

RF Industries:

RFN-1027-N RQN-1300-X P2RFC-2076-120 RFD-43MS-HPL RSA-3500-141 RMX-9000-1SR0 RFU-600-1X RFN-1005-1SR1 RFU-621 RFU-623-5 RFW-12602-1440 RP-3000-1B1 RFN-1007-X RFB-1124-1X RQN-1300-SR2 RFW-3317-16 RFW-13684-39 P2RFC-2175-48 RFU-632 RFD-1625DS-H1 RFD-1610DS-H8 P2RSA-3705-1 RFN-1000-C2S RFW-13684-12 RFD-1684-4 RSA-3402-1 RSA-3279 RFW-5147-96 RFE-6108 RFE-6110