
- *EPIC*™ (Enhanced-Performance Implanted CMOS) Submicron Process
- Typical V_{OLP} (Output Ground Bounce) < 0.8 V at V_{CC} = 3.3 V, T_A = 25°C
- Typical V_{OHV} (Output V_{OH} Undershoot) > 2 V at V_{CC} = 3.3 V, T_A = 25°C
- ESD Protection Exceeds 2000 V Per MIL-STD-833C, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)
- Latch-Up Performance Exceeds 250 mA Per JEDEC Standard JESD-17
- Supports Mixed-Mode Signal Operation on All Ports (5-V Input/Output Voltage With 3.3-V V_{CC})
- Bus Hold on Data Inputs Eliminates the Need for External Pullup/Pulldown Resistors
- Package Options Include Shrink Small-Outline (DB), Plastic Small-Outline (DW), and Thin Shrink Small-Outline (PW) Packages

DB, DW, OR PW PACKAGE
(TOP VIEW)



description

This octal buffer/line driver is designed for 2.7-V to 3.6-V V_{CC} operation; it can interface to a 5-V system environment.

The SN74LVCH244 is organized as two 4-bit line drivers with separate output-enable ($\overline{OE}$) inputs. When $\overline{OE}$ is low, the device passes data from the A inputs to the Y outputs. When $\overline{OE}$ is high, the outputs are in the high-impedance state.

Active bus-hold circuitry is provided to hold unused or floating data inputs at a valid logic level.

To ensure the high-impedance state during power up or power down, $\overline{OE}$ should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

The SN74LVCH244 is characterized for operation from –40°C to 85°C.

FUNCTION TABLE
(each buffer)


INPUTS		OUTPUT
$\overline{OE}$	A	Y
L	H	H
L	L	L
H	X	Z

EPIC is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.


Copyright © 1995, Texas Instruments Incorporated

logic symbol†

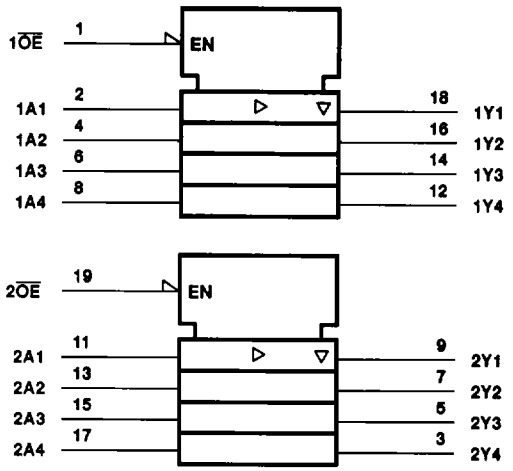

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

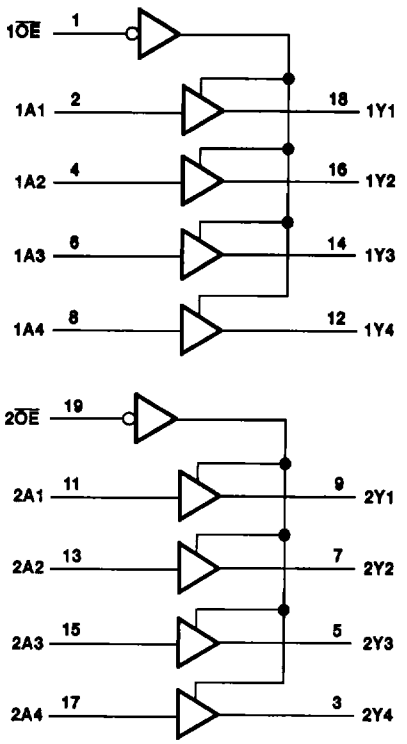

TEXAS INSTRUMENTS
POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V_{CC} ..... −0.5 V to 6.5 V
Input voltage range, V_I (see Note 1) ..... −0.5 V to 6.5 V
Voltage range applied to any output in the high-impedance or power-off state, V_O (see Note 1) ..... −0.5 V to 6.5 V
Voltage range applied to any output in the high or low state, V_O (see Notes 1 and 2) ..... −0.5 V to V_{CC} + 0.5 V
Input clamp current, I_{IK} (V_I < 0) ..... −50 mA
Output clamp current, I_{OK} (V_O < 0) ..... ±50 mA
Continuous output current, I_O (V_O = 0 to V_{CC}) ..... ±50 mA
Continuous current through V_{CC} or GND ..... ±100 mA
Maximum power dissipation at T_A = 55°C (in still air) (see Note 3): DB package ..... 0.6 W
DW package ..... 1.6 W
PW package ..... 0.7 W
Storage temperature range, T_{stg} ..... −65°C to 150°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
2. This value is limited to 4.6 V maximum.
3. The maximum package power dissipation is calculated using a junction temperature of 150°C and a board trace length of 750 mils. For more information, refer to the *Package Thermal Considerations* application note in the 1994 *ABT Advanced BiCMOS Technology Data Book*, literature number SCBD002B.

recommended operating conditions (see Note 4)

			MIN	MAX	UNIT
V_{CC}	Supply voltage	Operating	2	3.6	V
		Data retention only	1.5		
V_{IH}	High-level input voltage	V_{CC} = 2.7 V to 3.6 V	2		V
V_{IL}	Low-level input voltage	V_{CC} = 2.7 V to 3.6 V		0.8	V
V_I	Input voltage data inputs		0	5.5	V
V_O	Output voltage	High or low state	0	V_{CC}	V
		3 state	0	5.5	
I_{OH}	High-level output current	V_{CC} = 2.7 V		−12	mA
		V_{CC} = 3 V		−24	
I_{OL}	Low-level output current	V_{CC} = 2.7 V		12	mA
		V_{CC} = 3 V		24	
$\Delta t/\Delta v$	Input transition rise or fall rate		0	10	ns/V
T_A	Operating free-air temperature		−40	85	°C

NOTE 4: Unused control inputs must be held high or low to prevent them from floating.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS		V_{CC}†	MIN	TYP‡	MAX	UNIT
V_{OH}	I_{OH} = –100 µA		MIN to MAX	V_{CC}–0.2			V
	I_{OH} = – 12 mA		2.7 V	2.2			
			3 V	2.4			
	I_{OH} = – 24 mA		3 V	2.2			
V_{OL}	I_{OL} = 100 µA		MIN to MAX			0.2	V
	I_{OL} = 12 mA		2.7 V			0.4	
	I_{OL} = 24 mA		3 V			0.55	
I_I	V_I = 5.5 V or GND		3.6 V			±5	µA
$I_{I(hold)}$	V_I = 0.8 V		3 V	75			µA
	V_I = 2 V		3 V	–75			
	V_I = 0 to 3.6 V		3.6 V			±500	
I_{OZ}	V_O = V_{CC} or GND		MIN to MAX			±10	µA
	V_O = 3.6 V or 5.5 V					±50	
I_{CC}	V_I = V_{CC} or GND,	I_O = 0	3.6 V			10	µA
ΔI_{CC}	One input at V_{CC} – 0.6 V,	Other inputs at V_{CC} or GND	2.7 V to 3.6 V			500	µA
C_i	V_I = V_{CC} or GND		3.3 V		3.1		pF
C_o	V_O = V_{CC} or GND		3.3 V		5		pF

† For conditions shown as MIN or MAX, use the appropriate values under recommended operating conditions.
‡ All typical values are measured at V_{CC} = 3.3 V, T_A = 25°C.

switching characteristics over recommended operating free-air temperature range, C_L = 50 pF (unless otherwise noted) (see Figure 1)


PARAMETER	FROM (INPUT)	TO (OUTPUT)	V_{CC} = 3.3 V ± 0.3 V		V_{CC} = 2.7 V		UNIT
			MIN	MAX	MIN	MAX	
t_{pd}	A or B	Y	1.5	6.5		7.5	ns
t_{en}	$\overline{OE}$	Y	1.5	8		9	ns
t_{dis}	$\overline{OE}$	Y	1.5	7		8	ns
$t_{sk(o)}$†				1			ns

† Skew between any two outputs of the same package switching in the same direction. This parameter is warranted but not production tested.

operating characteristics, V_{CC} = 3.3 V, T_A = 25°C


PARAMETER			TEST CONDITIONS		TYP	UNIT
C_{pd}	Power dissipation capacitance per buffer/driver	Outputs enabled	C_L = 50 pF,	f = 10 MHz	33	pF
		Outputs disabled			2	

PARAMETER MEASUREMENT INFORMATION

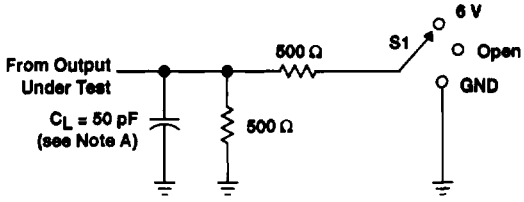


TEST	S1
t_{pd}	Open
t_{PLZ}/t_{PZL}	6 V
t_{PHZ}/t_{PZH}	GND


LOAD CIRCUIT FOR OUTPUTS

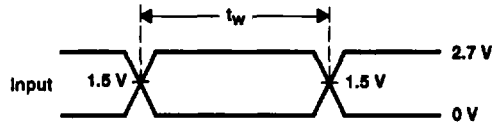


VOLTAGE WAVEFORMS
PULSE DURATION

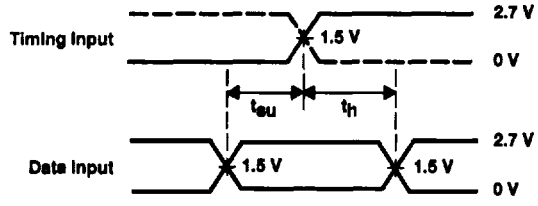

VOLTAGE WAVEFORMS
SETUP AND HOLD TIMES

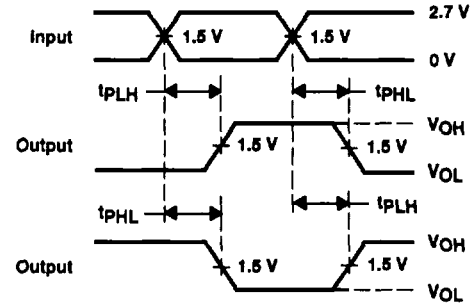

VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES
INVERTING AND NONINVERTING OUTPUTS

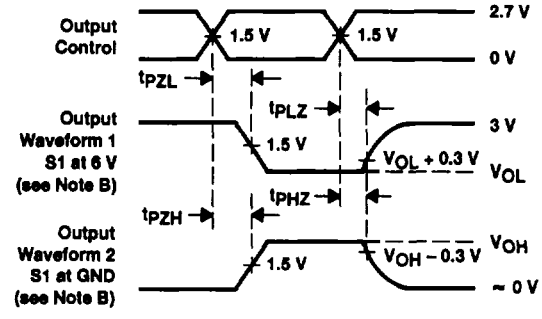

VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES
LOW- AND HIGH-LEVEL ENABLING

NOTES: A. C_L includes probe and jig capacitance.
B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r ≤ 2.5 ns, t_f ≤ 2.5 ns.
D. The outputs are measured one at a time with one transition per measurement.
E. t_{PZL} and t_{PZH} are the same as t_{en}.
F. t_{PLZ} and t_{PHZ} are the same as t_{dis}.
G. t_{PLH} and t_{PHL} are the same as t_{pd}.

Figure 1. Load Circuit and Voltage Waveforms

TEXAS INSTRUMENTS
POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Texas Instruments:

OPA2541BM UCC27210DR MSP430G2403IPW28 BQ24314DSGR TLC085CDR MSP430F2112TRHBT OPT3101RHFR TCAN332DR TPS92200D2DDCR UA9637ACPS ADS8344E DS90C383MTDX/NOPB LMV358MMX/NOPB PCM56U TPS71710DCKR SN75LV4735DBLE TLV990-28PFB TPA6203A1DRBR CC2520RHDR MSP430F47127IPZ MSP430F5131IDA SN74GTL2006PWR MSP430F2001TRSAT SN74LVCZ240APW TPS51125ARGER TPS7A8018DRBR MSP430G2332IN20 OPA643P ISO124U/1K MSP430F5172IRSBT