http://hcdz2017.com/

标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

CKT	DIM A	DIM B	DIM C	DIM D	DIM E
4	1.50	2.56	7.60	6.90	
5	2.00	3.06	8.10	7.40	
6	2.50	3.56	8.60	7.90	
7	3.00	4.06	9.10	8.40	
8	3.50	4.56	9.60	8.90	
9	4.00	5.06	10.10	9.40	
10	4.50	5.56	10.60	9.90	
11	5.00	6.06	11.10	10.40	
12	5.50	6.56	11.60	10.90	
13	6.00	7.06	12.10	11.40	
14	6.50	7.56	12.60	11.90	
15	7.00	8.06	13.10	12.40	
16	7.50	8.56	13.60	12.90	
17	8.00	9.06	14.10	13.40	4.45
18	8.50	9.56	14.60	13.90	
19	9.00	10.06	15.10	14.40	
20	9.50	10.56	15.60	14.90	
21	10.00	11.06	16.10	15.40	
22	10.50	11.56	16.60	15.90	
23	11.00	12.06	17.10	16.40	
24	11.50	12.56	17.60	16.90	
25	12.00	13.06	18.10	17.40	
26	12.50	13.56	18.60	17.90	
27	13.00	14.06	19.10	18.40	
28	13.50	14.56	19.60	18.90	
29	14.00	15.06	20.10	19.40	
30	14.50	15.56	20.60	19.90	
31	15.00	16.06	21.10	20.40	
32	15.50	16.56	21.60	20.90	

CKT	DIM A	DIM B	DIM C	DIM D	DIM E
33	16.00	17.06	22.10	21.40	4.45
34	16.50	17.56	22.60	21.90	
35	17.00	18.06	23.10	22.40	
36	17.50	18.56	23.60	22.90	
37	18.00	19.06	24.10	23.40	
38	18.50	19.56	24.60	23.90	
39	19.00	20.06	25.10	24.40	
40	19.50	20.56	25.60	24.90	
41	20.00	21.06	26.10	25.40	
42	20.50	21.56	26.60	25.90	
43	21.00	22.06	27.10	26.40	
44	21.50	22.56	27.60	26.90	
45	22.00	23.06	28.10	27.40	
46	22.50	23.56	28.60	27.90	5.00
47	23.00	24.06	29.10	28.40	
48	23.50	24.56	29.60	28.90	
49	24.00	25.06	30.10	29.40	
50	24.50	25.56	30.60	29.90	
51	25.00	26.06	31.10	30.40	
52	25.50	26.56	31.60	30.90	
53	26.00	27.06	32.10	31.40	
54	26.50	27.56	32.60	31.90	
55	27.00	28.06	33.10	32.40	
56	27.50	28.56	33.60	32.90	
57	28.00	29.06	34.10	33.40	
58	28.50	29.56	34.60	33.90	
59	29.00	30.06	35.10	34.40	
60	29.50	30.56	35.60	34.90	

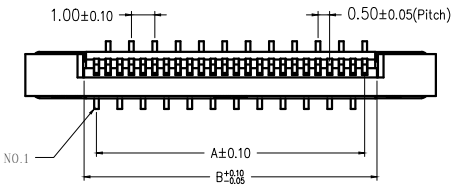

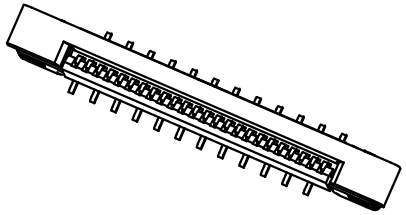

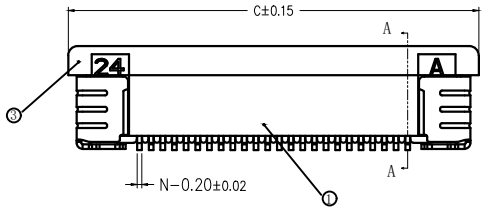



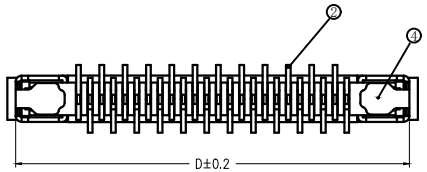



SECTION A-A



With cover

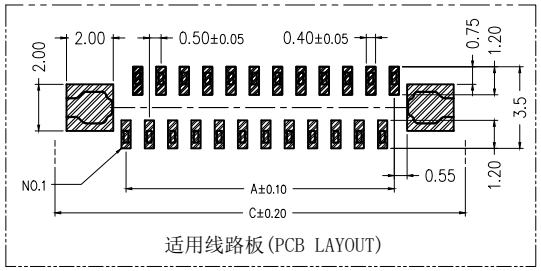

适用线路板(PCB LAYOUT)

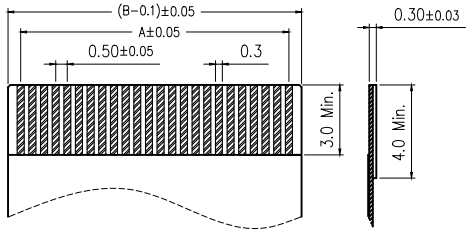

适用扁平线(Applicable Flat Cable)

技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、 缺陷、裂纹等现象.
(The surface of the plastic parts should be smooth,no rough edges,no obvious shrinkage,defects,cracks and other phenomena.)
2. 温度范围(Temperature range): -25° C～+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): ≤0.03Ω.
5. 绝缘电阻(Insulation resistance):≥500MΩ.

序 号	品 名	材 质	电镀/颜色	备 注
2	端子	铜	镀锡	
1	胶芯	LCP	本色	

深圳市虹成电子有限公司	品 名 TITLE	FPC座	
	料 号 PART NO	HC-FPC-0.5-6P-LH20	
GENERAL TOLERANCES (UNLESS SPECIFIED)	比 列 SCALE	1:1	
X. ±.50 .XX ±.10	单 位 UNIT	MM	制 图 DRAW: AhYe
.X ±.20 .XXX ±.05	张 数 PART NO	1 OF 1	审 核 CHECKED: 夏操云
ANGLES ±1°	版 本 REV	A	批 准 APPROVE: 赵亮亮

http://hcdz2017.com/

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HC:

HC-FPC-0.5-6P-CSH20 HC-USB3.0-C34-P HC-FPC-0.5-10P-FH20 HC-FPC-0.5-24P-FH20
HC-FPC-0.5-40P-FH20 HC-USB3.0-L175-2X1-J HC-PM254-8.5H-2x30PZ HC-PZ254-11.5L-1x10PZ
HCZZ0451-4 HC-PM254-8.5H-2x20PS HC-FPC-0.5-50P-FHH20 HC-PM200-4.3H-2x8PS
HC-PZ254-11.5L-2x18PZ HC-USB2.0-L100-093P HCZZ0032-6 HC-PHB2.0-2x4AW
HC-PZ254-11.5L-1x20PZ HC-PM200-4.3H-2x20PZ HC-PM254-5.0H-2x10PZ HC-PZ127-7.2L-2x3PS
HC-PM200-4.3H-2x6PS HC-PM254-8.5H-1x21PZ HC-PZ254-13.8L-1x6PWA HC-USB3.0-C26
HC-USB3.0-L257-J HCZZ0001-2 HCZZ0451-6 HCZZ0576-5 HC-PHB2.0-2x5A HCZZ0514-6