





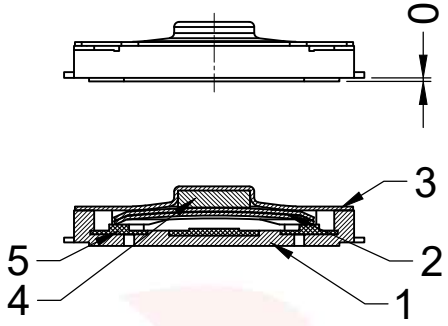

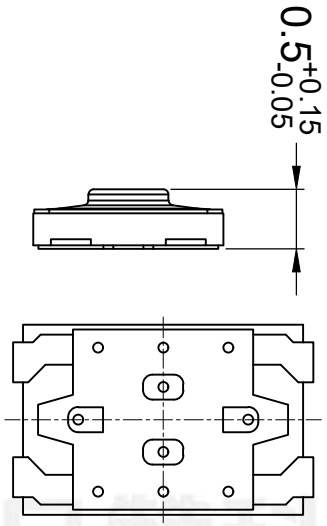

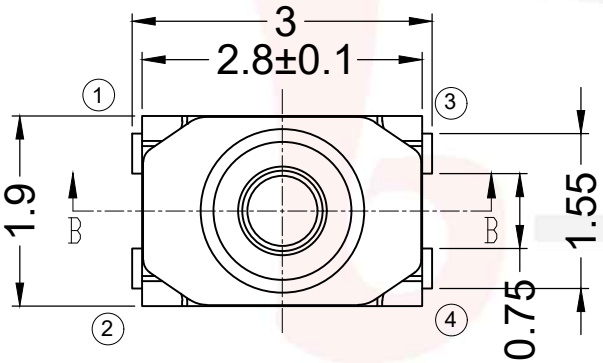

P.C.B LAND DIMENSION

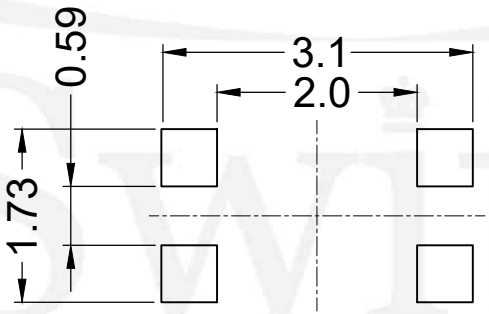

GT-TC201A-H0050-L1


G-SWITCH


Operating Force
A=180gf
B=250gf
C=220gf

Switch Height(㎜)
H0050=0.5mm

Switch lifetime (Force)
L1=100,000 Cycles
L3=300,000 Cycles

Circuit Diagram





Pb Process Capable
RoHS Compliant 2002/95/EC
HALOGEN Compliant Halogen Free

G-Switch Specification:
Operating temperature range：-30℃to+85℃
Rating：50mA.12V DC
Insulation resistance:：100MΩ min.100V DC
Dielectric strength： 250V AC for 1 min
Contact resistance:：100m Ω max.
Travel：0.15±0.05mm

品赞科技 G-Switch®	**G-Switch Electronic (HongKong) CO.,Ltd.**				
Unless otherwise specified, Tolerance: X. ±0.30 X.x ±0.20 X.xx ±0.15 X.xxx ±0.10 Angles ±3°	DESIGN Yvette Chen	DATE 2019.05.29	Molde code: GT-TC201A-H0050-L1		
	CHECKED	DATE			
	APPROVED	DATE			
	http://www.dg-switch.com		REV.: X1	SCALE: 4:1	UNIT: mm
	TEL:0769-82388879		SIZE: A4	SHEET: 1/1	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

G-Switch:

GT-TCB73B-H090-L1 GT-USB-6017 GT-USB-7010H GT-USB-7019D GT-BTP30004-0720B-015A GT-BTP30006-0650B-015A GT-USB-7010EN GT-USB-7012D SS-23H02-G080 GT-BTP30007-0720B-015A ST-0275S00-082-182 GT-BTP16006-0180B-014B GT-BTP25004-0400A-010A GT-TC025D-H0065-L1 GT-TC074A-H050-L1 GT-USB-2201 GT-TC079A-H0040-L1 GT-USB-7084B GT-B0803MSV20-60B0401 GT-F0502SR20-04SMT01 GT-TC155A-H0060-L50 GT-TC193A-H0675-L1 GT-BTP30007-0350B-019B GT-BTR20008-0460A-004A GT-USB-7093B GT-B0403FSV19-50B1101 GT-BTP30004-0350B-019B GT-BTP30006-0500B-015A GT-B0803MSV20-10B0401 GT-BTP30007-0240B-019B