




MAPX	MODIFICATION	DATE

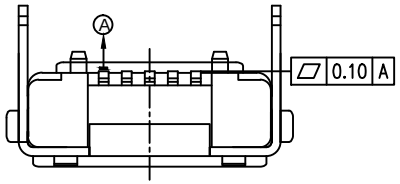











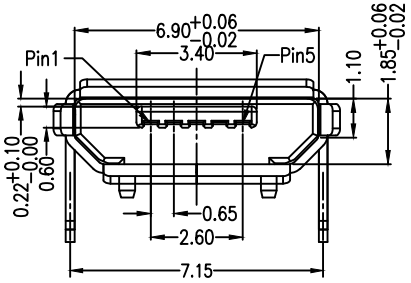

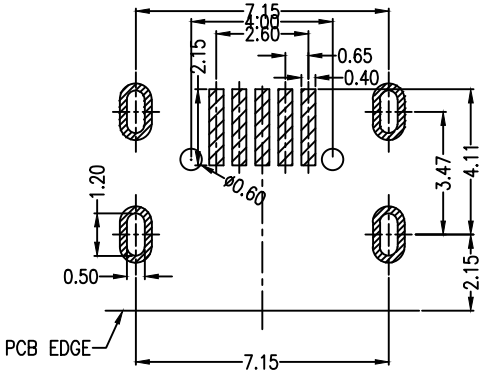

RECOMMANDED PCB LAYOUT

PCB图仅供参考

Note:

1.Material:

1.1 Housing: High temperature thermoplastic with g.f,UL94v-0

1.2 Contact: copper alloy,t=0.20mm

1.3 Shell: copper alloy,t=0.25mm

2.Specification:

2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.

2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 100 MΩ Min.

2.5 Total mating force: 3.57 Kgf Max.

2.6 Total unmating force: 1.0 Kgf Min.

2.7 Temperature range: -30°C~80°C

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERMSE			
X.	±0.35	X.	±5.°
.X	±0.30	.X	±2.°
.XX	±0.25	.XX	±1.°
.XXX	±0.15	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	邱建辉	制图料号 PRODUCT PART NO.	920-A52A2021S10102
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	MICRO 5S B型有边7.2四脚插板有柱前1.6后1.95端子加长0.75
日期 DATE	2012.09.24	核准 APPD	黄国荣	角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

920-154A2021Y10110 904-232B2032S10100 907-111A1022D10200 920-A62A2021S10108
920-C52A2021S10105 906-752B1114D10200 917-B88C201AH70201 904-331B2032S10200
910-151A2021D10100 912-112A1011D10100 920-F52A2021S10105 920-A62A2021S10104
908-351A1011D10100 918-415K3028S40000 905-761A2032S10200 911-221A2021S10100
918-318K2023C40005 918-418K2022Y40011 918-468K2029Y50000 904-232A2031S10100
906-552A1012D10200 907-312A1101Y10210 919-162A1012D10400 920-A64A2091S101A3
920-C62A2021S10103 906-262A1021D10200 912-112A2021S10100 912-312A1012D10100
916-151A1022Y10200 917-P81A202ES60201