
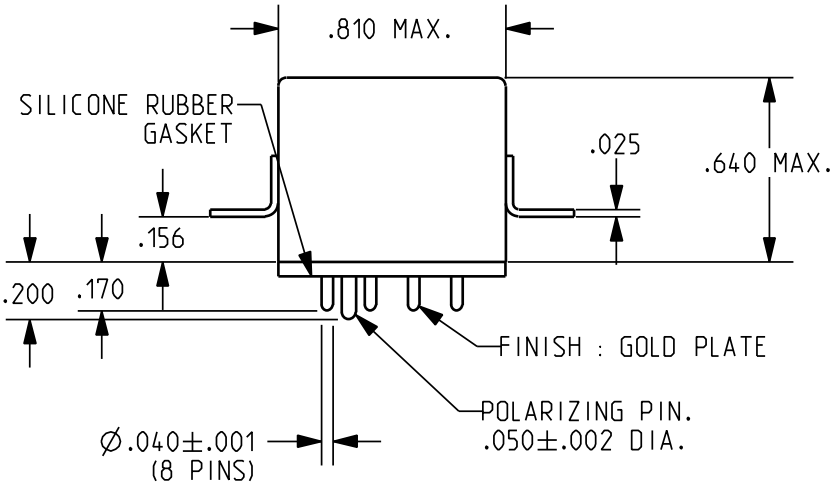


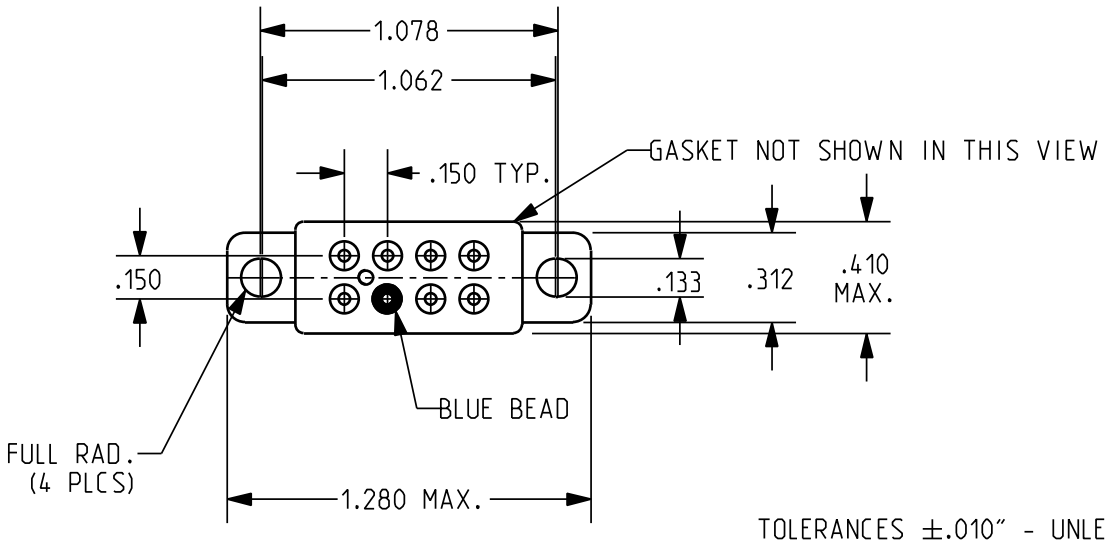

REV. A
DCO 300783

TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C

RESISTANCE	500 OHMS ±10%
NOMINAL VOLTAGE	28 VDC
MUST OPERATE	13.5 VDC MAX.
	TRANSIENT SUPPRESSION - 42 VDC MAX.
MUST RELEASE	5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:


VIBRATION 70 Hz TO 3000 Hz @ 30 g's

SHOCK 200 g's 6 MS. DURATION

TEMPERATURE -70 °C TO +125 °C

NOTES:
1. OPERATE, RELEASE 5 MS MAX.
2. CONTACT STABILIZATION 2.5 MS MAX.
3. CONTACT BOUNCE 1 MS MAX.
4. CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

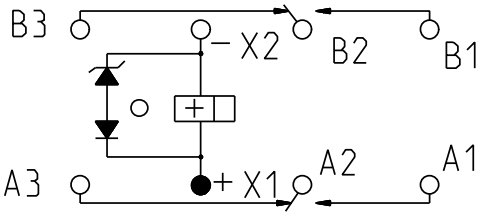

TERMINAL VIEW

CONTACT RATING: LOW LEVEL
TO 5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE,
100,000 OPERATIONS

DR. B.D. 14MAR2008 | CK. J.M.B. 3/17/08

Tyco Electronics
©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. M83536/2-024L
CUST. NO. _____ REV. _____

TE NUMBER
4-1617758-9

CII PART NUMBER
FCB-205-0224L

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-962915-1 1393431-1 1743455-2 1969656-1 2005330-1 2380312-2 CRGCQ2010J3K3 SBCHE64R7K 1-794222-0 1903112-2 2834055-1 3-1393225-0 936348-1 SBCHE154R7K TE50BR39J 2-292161-3 CPF0402B37K4E1 MPT100C18RF SMW73R0JT 2310537-1 3631B101LL RH73H2A40MKTN U5254-000005-030PA ROX05SJ18R 3430B2F51RTDF 650075-000 917696-1 141991-2 175977-2 2377783-2