PDC-4P- 5,0-U80/138FS - Power cable

1430393

https://www.phoenixcontact.com/us/products/1430393

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position, free cable end, on Socket straight 1-3/8"-16UN, coding: Standard, cable length: 5 m

Commercial data

Item number	1430393
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF14
Product key	BF1INA
GTIN	4067923054011
Weight per piece (including packing)	22.22 g
Weight per piece (excluding packing)	22.22 g
Country of origin	MX

Technical data

Notes

Trade restriction

CE note	The products are offered exclusively for export outside the EU and the European Economic Area.

Product properties

Number of positions	4
Shielded	no

Material specifications

Flammability rating according to UL 94	V0
Material of grip body	Thermoplastic
Contact material	CuZn
Contact surface material	Au
Contact carrier material	Thermoplastic
Material for screw connection	Anodized aluminum

Electrical properties

Insulation resistance	5000 MΩ
Nominal voltage U_N	600 V AC
Nominal current I_N	25 A (UL 2237)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	500

Connector

Connection 2

Type	Socket straight 1-3/8"-16UN
Coding type	Standard

Cable/line

Cable length	5 m

TC-ER/600V [U80]

Shielded	no
Cable type	TC-ER/600V
Cable type (abbreviation)	U80
External cable diameter	14.00 mm
Outer sheath, material	TPE
External sheath, color	black

Conductor material	Bare Cu litz wires
Conductor cross section	4 x AWG 10
Material wire insulation	PVC
Single wire, color	black 1, green 2, red 3, white 4
Overall twist	4 wires, twisted
Nominal voltage, cable	600 V 3 wire
Resistance to oil	yes
Flame resistance	FT4
Other resistance	Wet locations
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation)

Environmental and real-life conditions

Ambient conditions


Degree of protection	IP67
Ambient temperature (operation)	-40 °C ... 90 °C (Plug / socket)
	-40 °C ... 90 °C (cable, fixed installation)

Standards and regulations

Standards/specifications	UL 2237
Note	SCCR 65KA
Standard designation	Vibration
Standards/specifications	MIL-STD-202 method 204
Standard designation	Thermal shock
Standards/specifications	MIL-STD-202 method 207
Standard designation	48 hour salt spray
Standards/specifications	MIL-STD-202 method 101


Drawings

Schematic diagram

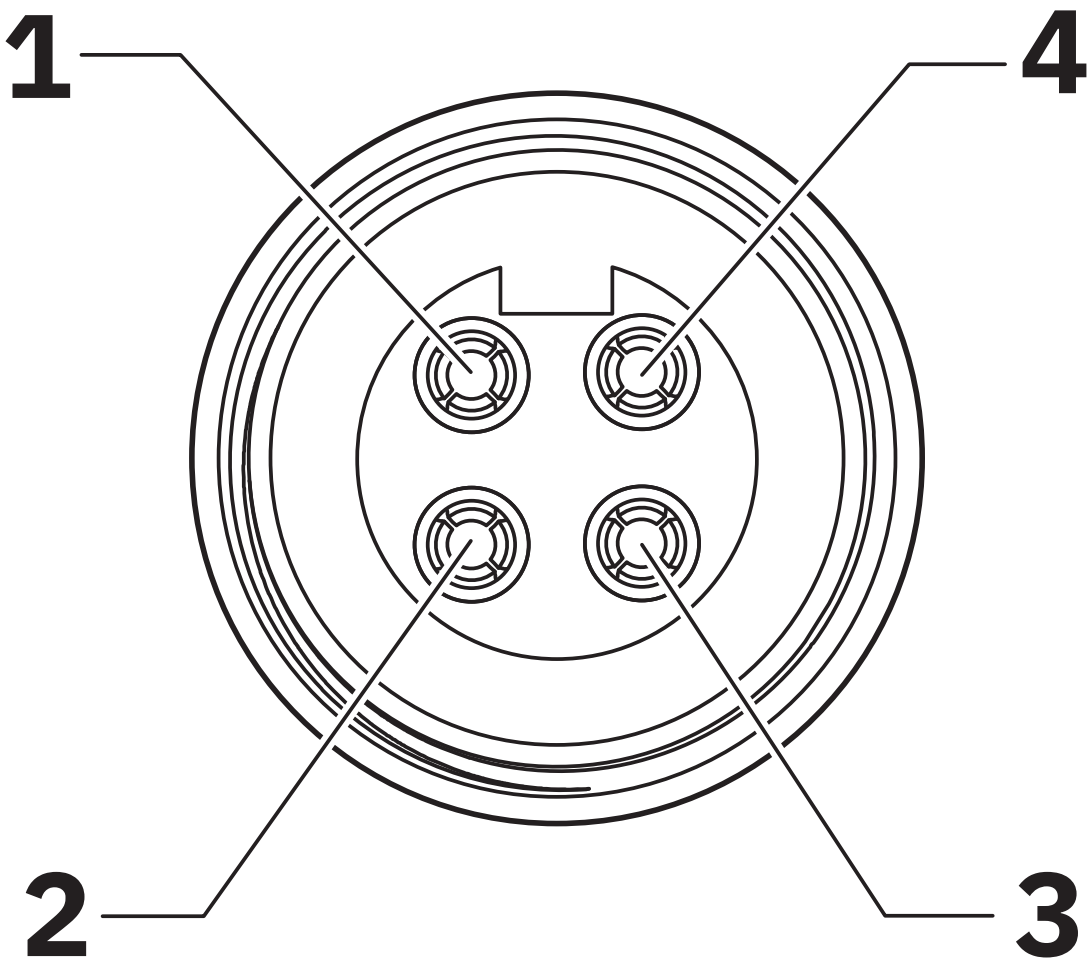


Pin assignment, socket, 1-3/8"-16UN, 4-pos., view of female side

Circuit diagram

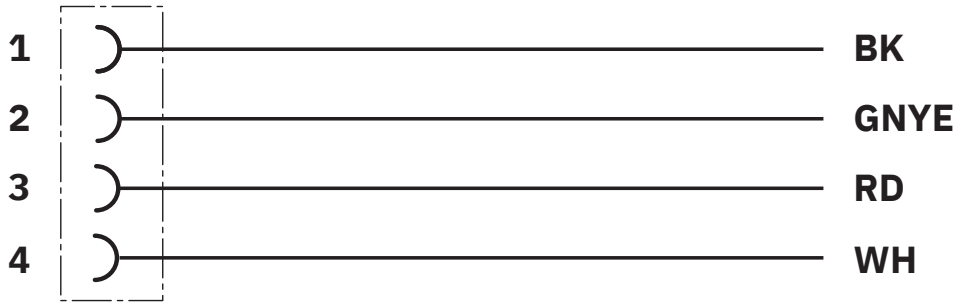

Dimensional drawing

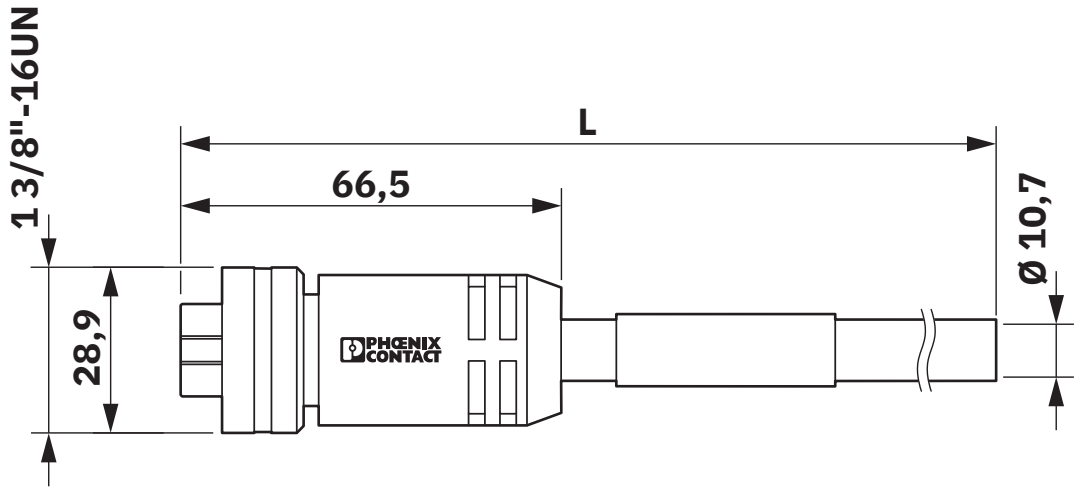

1-3/8"-16UN cordset

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-13.0	27060311

ETIM

ETIM 9.0	EC001855

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com