Power Resistor Thick Film Technology



FEATURES

- 100 W at 25 °C case temperature heatsink mounted
- Direct mounting ceramic on heatsink
- Broad resistance range: 0.8 Ω to 4 kΩ
- Non inductive
- TO-247 package: compact and easy to mount
- Higher pulse absorption, up to 52 J/0.1 s
- **AEC-Q200 qualified**
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS COMPLIANT

LINKS TO ADDITIONAL RESOURCES

3D Models

LTO 100 H is the extension of LTO 100. This unique design is able to absorb 40 % more energy than standard LTO.

DIMENSIONS in millimeters

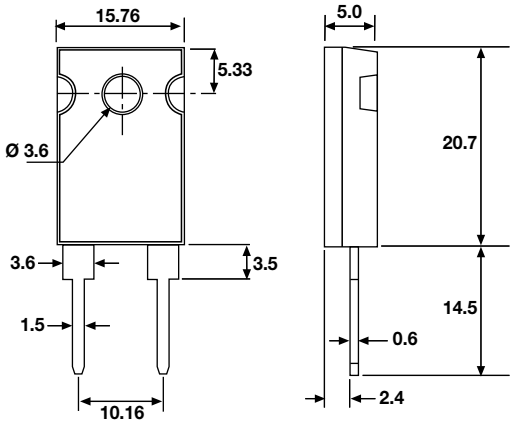

Note

- Tolerances unless stated: ± 0.3 mm

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	SIZE	RESISTANCE RANGE Ω	RATED POWER $P_{25\,°C}$ W	LIMITING ELEMENT VOLTAGE U_L V	TOLERANCE ± %	TEMPERATURE COEFFICIENT ± ppm/°C	CRITICAL RESISTANCE Ω
LTO 100 H	TO-247	0.8 to 4K	100	500	2, 5, 10	200, 350	2.5K

MECHANICAL SPECIFICATIONS

Mechanical Protection	Molded
Resistive Element	Thick film
Substrate	Alumina
Connections	Tinned copper
Weight	4 g max.
Mounting Torque	1 Nm

ENVIRONMENTAL SPECIFICATIONS

Temperature Range	-55 °C to +175 °C
Climatic Category	55 / 175 / 56
Flammability	IEC 60695-11-5 Application time: t_a = 10 s Burning duration: t_b < 30 s

TECHNICAL SPECIFICATIONS

Dissipation and Associated	Onto a heatsink
Power Rating and Thermal Resistance of the Component	100 W at +25 °C (case temp.) $R_{TH\ (j-c)}$: 1.5 °C/W Free air: 3.5 W at +25 °C
Temperature Coefficient	See Performance table ± 200 ppm/°C
Dielectric Strength MIL STD 202	3000 V_{RMS} - 1 min 10 mA max.
Insulation Resistance	≥ 10^4 MΩ
Inductance	≤ 0.1 µH

For technical questions, contact: sferfixedresistors@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

PERFORMANCE		
TESTS	**CONDITIONS**	**REQUIREMENTS**
Momentary Overload	EN 60115-1 1.5 Pr/5 s $U_S < 1.5\ U_L$	± (0.5 % + 0.005 Ω)
Load Life	EN 60115-1 1000 h Pr at +25 °C	± (1 % + 0.005 Ω)
High Temperature Exposure	AEC-Q200 rev. D conditions: MIL-STD-202 method 108 1000 h, +175 °C, unpowered	± (0.25 % + 0.005 Ω)
Temperature Cycling	AEC-Q200 rev. D conditions: JESD22 method JA-104 1000 cycles, -55 °C to +125 °C dwell time -15 min	± (1 % + 0.005 Ω)
Biased Humidity	AEC-Q200 rev. D conditions: MIL-STD-202 method 103 1000 h, 85 °C, 85 % RH	± (1 % +0.005 Ω)
Operational Life	AEC-Q200 rev. D conditions: MIL-STD-202 method 108 2000 h, 90/30, powered, +125 °C	± (1 % +0.005 Ω)
ESD Human Body Model	AEC-Q200 rev. D conditions: AEC-Q200-002 25 kV_{AD}	± (0.5 % +0.005 Ω)
Vibration	AEC-Q200 rev. D conditions: MIL-STD-202 method 204 5 *g*'s for 20 min, 12 cycles test from 10 Hz to 2000 Hz	± (0.5 % +0.005 Ω)
Mechanical Shock	AEC-Q200 rev. D conditions: MIL-STD-202 method 213 100 *g*'s, 6 ms, 3.75 m/s 3 shocks/direction	± (0.5 % +0.005 Ω)
Terminal Strength	AEC-Q200 rev. D conditions: AEC-Q200-006 2 kgf, 60 s	± (0.25 % +0.01 Ω)

SPECIAL FEATURES		
Resistance Values	≥ 0.8	> 20
Tolerances	± 2 % at ± 10 %	
Typical Temperature Coefficient (-55 °C to +175 °C)	± 350 ppm/°C	± 200 ppm/°C

CHOICE OF THE HEATSINK

The user must choose according to the working conditions of the component (power, room temperature).
Maximum working temperature must not exceed 175 °C. The dissipated power is simply calculated by the following ratio:

$$P = \frac{\Delta T}{[R_{TH\ (j-c)}] + [R_{TH\ (c-h)}] + [R_{TH\ (h-a)}]} \quad (1)$$

P: Expressed in W

ΔT: Difference between maximum working temperature and room temperature

$R_{TH\ (j-c)}$: Thermal resistance value measured between resistive layer and outer side of the resistor. It is the thermal resistance of the component.

$R_{TH\ (c-h)}$: Thermal resistance value measured between outer side of the resistor and upper side of the heatsink. This is the thermal resistance of the interface (grease, thermal pad), and the quality of the fastening device.

$R_{TH\ (h-a)}$: Thermal resistance of the heatsink.

Example:

$R_{TH\ (c-h)} + R_{TH\ (h-a)}$ for LTO 100 H power rating 10 W at ambient temperature +25 °C
Thermal resistance $R_{TH\ (j-c)}$: 1.5 °C/W
Considering equation (1) we have:

$$\Delta T = 175\ °C - 25\ °C = 150\ °C$$

$$R_{TH\ (j-c)} + R_{TH\ (c-h)} + R_{TH\ (h-a)} = \frac{\Delta T}{P} = \frac{150}{10} = 15\ °C/W$$


$$R_{TH\ (c-h)} + R_{TH\ (h-a)} = 15\ °C/W - 1.5\ °C/W = 13.5\ °C/W$$

with a thermal grease $R_{TH\ (c-h)}$ = 1 °C/W, we need a heatsink with $R_{TH\ (h-a)}$ = 12.5 °C/W.

For technical questions, contact: sferfixedresistors@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

POWER RATING


The temperature of the case should be maintained within the limits specified.
To improve the thermal conductivity, surfaces in contact should be coated with a silicone grease and the torque applied on the screw for tightening should be around 1 Nm.

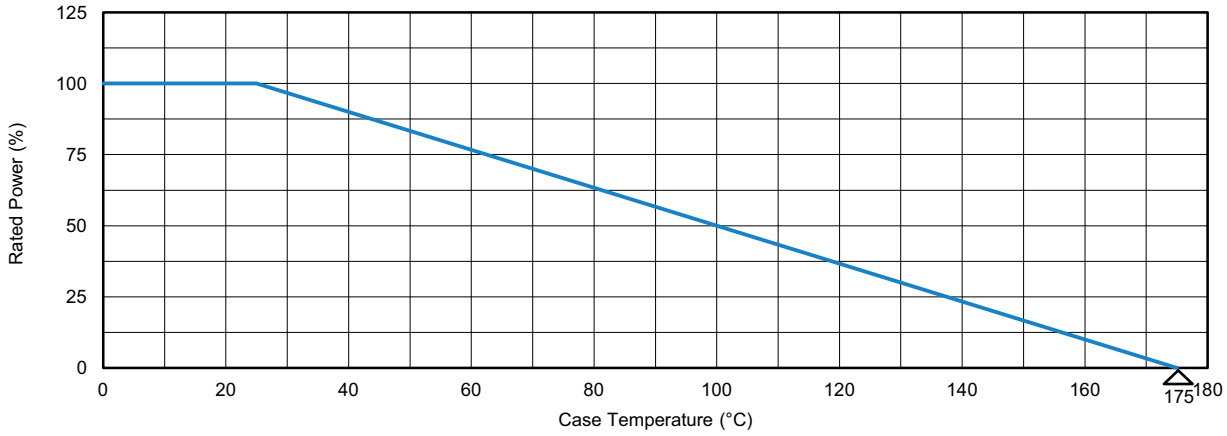


OVERLOADS

In any case the applied voltage must be lower than the maximum overload voltage of 750 V.
The values indicated on the graph below are applicable to resistors in air or mounted onto a heatsink.

ENERGY CURVE

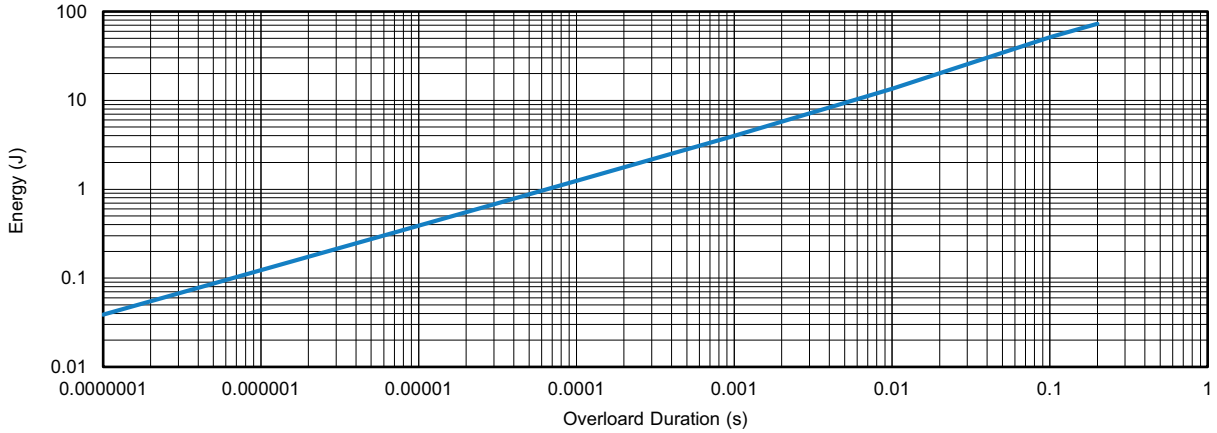

POWER CURVE

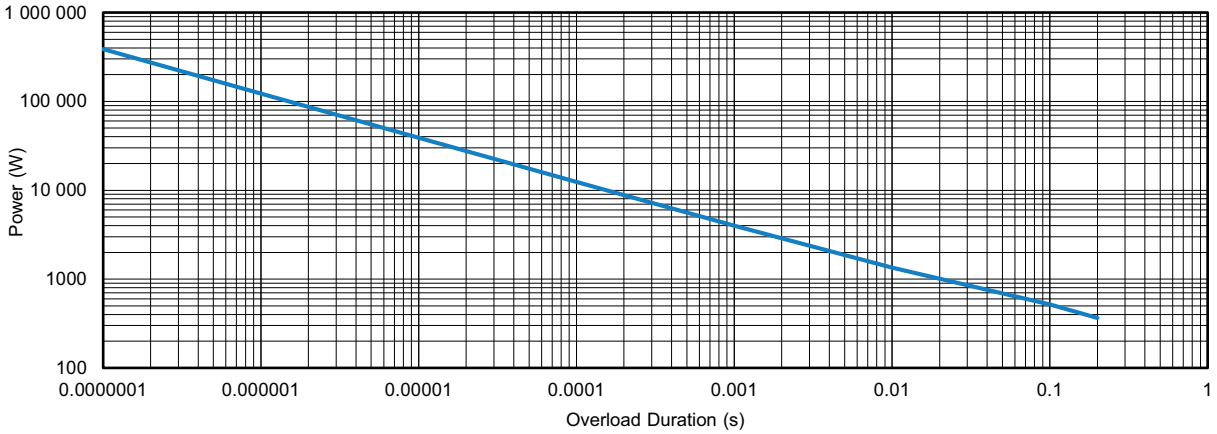

For technical questions, contact: sferfixedresistors@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

PACKAGING

Tube of 30 units

MARKING

Model, style, resistance value (in Ω), tolerance (in %), manufacturing date, Vishay Sfernice trademark.

ORDERING INFORMATION

LTO	100	H	2.7 kΩ	± 5 %	xxx	TU30	e3
MODEL	STYLE	ENERGY	RESISTANCE VALUE	TOLERANCE	CUSTOM DESIGN	PACKAGING	LEAD (Pb)-FREE
				± 2 % ± 5 % ± 10 %	Optional on request: special TCR, shape etc.		

GLOBAL PART NUMBER INFORMATION

L	T	O	1	0	0	H	2	7	0	0	0	J	T	E	3

GLOBAL MODEL	SIZE	ENERGY	OHMIC VALUE	TOLERANCE	PACKAGING	LEAD (Pb)-FREE
LTO	**100**	H = high pulse absorption	The first four digits are significant figures and the last digit specifies the number of zeros to follow. R designates decimal point. **48R70** = 48.7 Ω **27000** = 2700 Ω = 2.7 kΩ	**G** = 2 % **J** = 5 % **K** = 10 %	**T** = tube Tube 30 pieces	**E3** = pure tin

For technical questions, contact: sferfixedresistors@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Vishay Intertechnology:

WSL2512R0300FTB WSL27265L000FEB BRT13-H-X006 ISOA200R11003JT PR03000204700JAC00 PTCCL05H280HTE SM8S43AHE3_A/I VS-50RIA60 1.5SMC91A-E3/57T PR01000101603JR500 CRCW2512150RFKEGHP RCL12183R30FKEK CCF5510K0FKE36 CRCW08051M00FKEA CRCW1206510KFKEA ILHB1806ER600V SE20DLGHM3/I CRCW040213K0FKTD RS0105R000FE12 SMBJ12CA-E3/52 SQD50P08-28_GE3 SS2FN6HM3/H SUD50P04-08-GE3 CRCW1206270KJNEA LTO150H2R200JTE3 PR02000204709JA100 PTF5610K000BYEK 293D337X96R3D2T-E3 LTO150H470R0JTE3 MSS2P3-M3/89A