



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	2May2015	GY	CW
	B	ECR-15-015359	19NOV2015	GY	CW

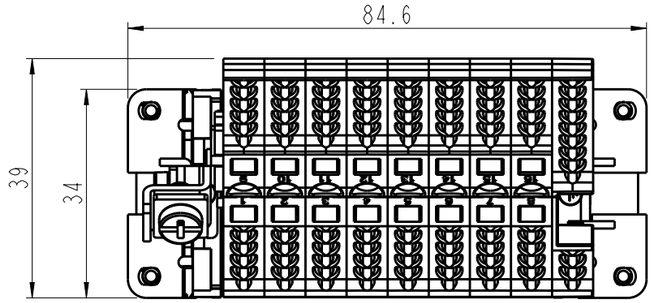

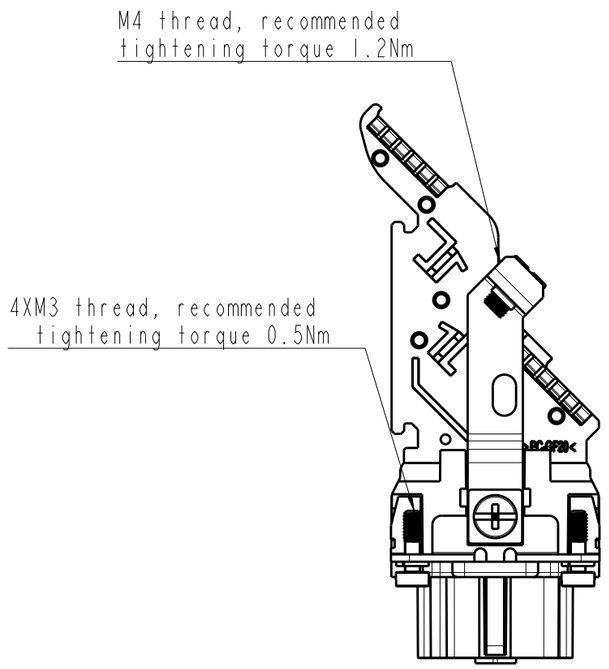

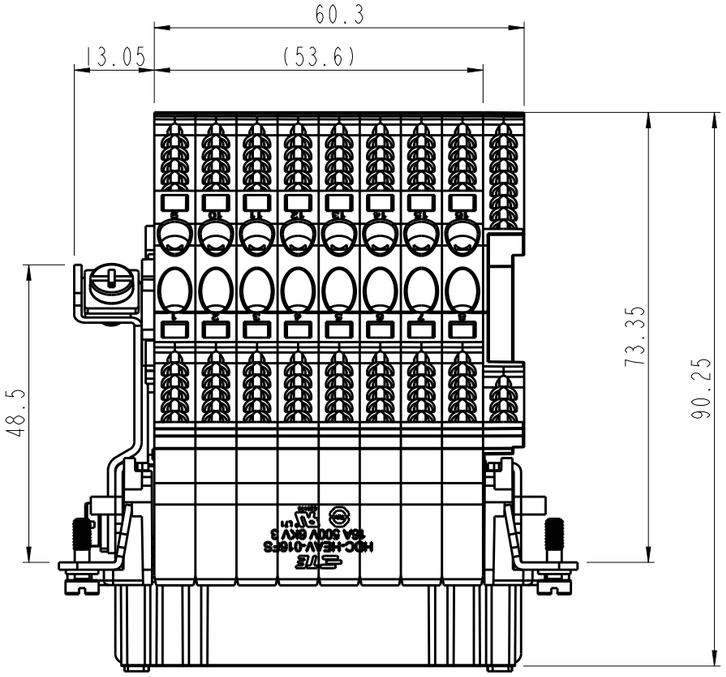

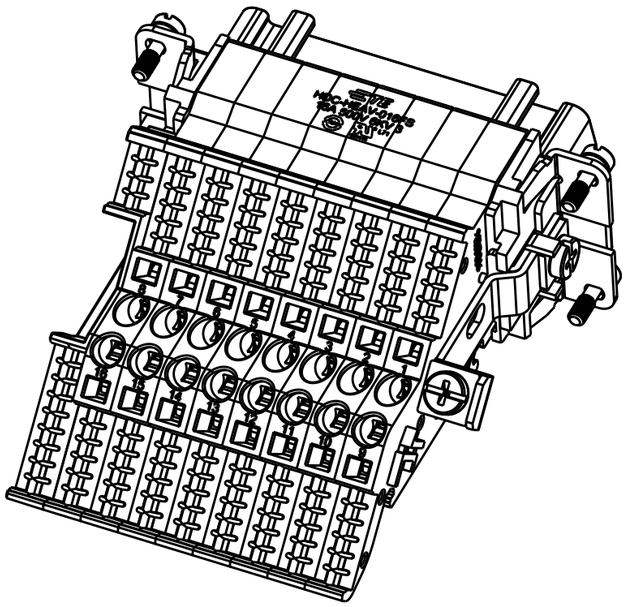

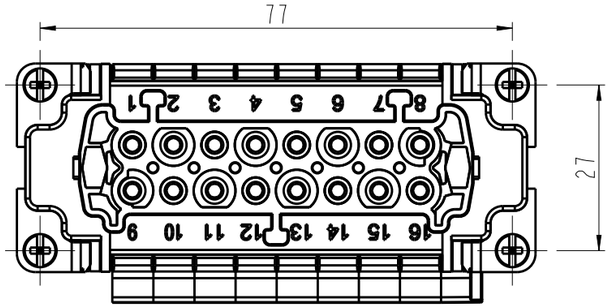

NOTES:

1. TECHNICAL CHARACTERISTICS:
   INSULATION MATERIAL: PC(Gray)
   RATED VOLTAGE: 500V
   RATED CURRENT: 16A
   INSULATION RESISTANCE: >=400MΩ
   RATED IMPULSE VOLTAGE: 6KV
   POLLUTION DEGREE: 3
   CONTACT RESISTANCE: <=5mΩ
   FLAMMABILITY: UL94V-0
   MATING CYCLES: 500
   OPERATION TEMPERATURE: -40°C~+125°C
   WIRE RANGE: 0.2mm²~2.5mm² (AWG24-AWG14)
   CONTACT FINISH: SILVER PLATED
   CONTACT TYPE: SPRING CONTACT

注释:

1. 技术参数:
   绝缘材料: PC(Gray)
   额定电压: 500V
   额定电流: 16A
   绝缘电阻: >=400MΩ
   脉冲电压: 6KV
   污染等级: 3
   接触电阻: <=5mΩ
   阻燃等级: UL94V-0
   插拔次数: 500
   工作温度: -40°C~+125°C
   接线范围: 0.2mm²~2.5mm² (AWG24-AWG14)
   端子表面处理: 镀银
   接线类型: 弹片压接

HEAV-016-FS	T2100163201-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL - -

FINISH - -

DWN Gino.Yao 16FEB2015
CHK Chris.Wang 16FEB2015
APVD Xiang.Xu 16FEB2015
PRODUCT SPEC 108-137075
APPLICATION SPEC 114-137075
WEIGHT -

TE Connectivity

NAME HEAV-016-FS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	-	C-T2100163201000	-

Customer Drawing

SCALE 1:1 SHEET 1 OF 1 REV B

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

141991-2 2310537-1 2380312-2 1-962915-1 CRGCQ2010J3K3 RH73H2A40MKTN SBCHE154R7K
U5254-000005-030PA 2834055-1 1969656-1 917696-1 CPF0402B37K4E1 1903112-2 2-292161-3
2005330-1 2377783-2 3430B2F51RTDF 1-794222-0 1393431-1 1743455-2 MPT100C18RF TE50BR39J
3-1393225-0 3631B101LL 936348-1 ROX05SJ18R SBCHE64R7K SMW73R0JT 175977-2 650075-000