
Rocker Switch | **SRD1-1F-DC-1-BRR**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

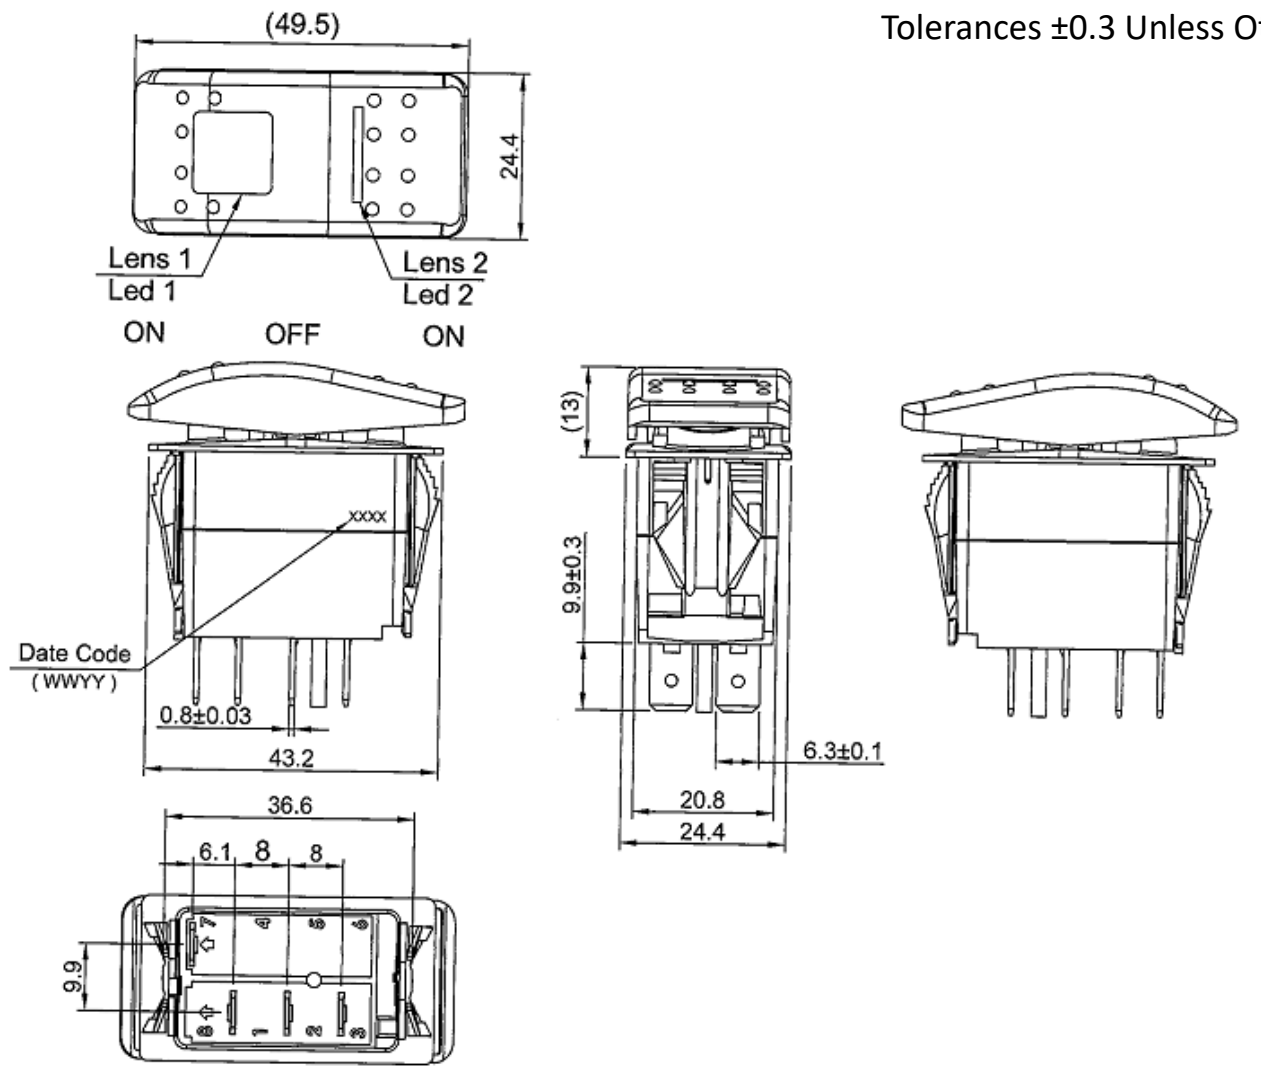


Mounting Hole

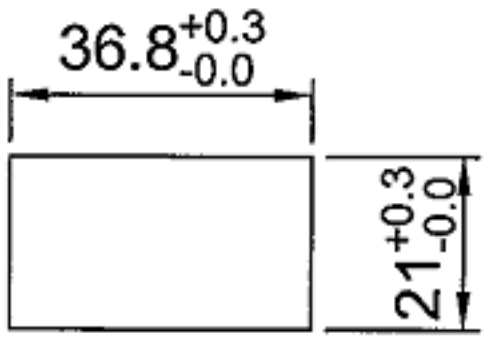

Thickness: 1.0-5.0mm

Circuit Diagram

4P SPDT ON-OFF-ON (LED-D)

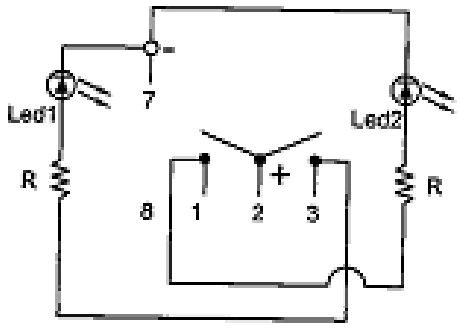

Electrical Specifications

Rating	21A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame/ Actuator	Black, Nylon 66 (94V-2)
Lens (1,2)	White diffused, PC
LED (1,2)	Red, dependent
Terminals	Silver plated copper/ Brass
Waterproof	IP56

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

TA2-1G-DC-6-O TE1-1F-DC-1-PB TE3-1A-DC-1-AL PB-1B-DC-2-RIL RA4-2A-DC-2-AL SB-1B-DC-3-B WR1 PD-1E-DC-9-UL SRD2-1G-DC-1-BNN SRD2-2F-DC-1-BNN TA1-1A-DC-4 SC-B TC6-P1-Z PB-1A-DC-2-B RF1-1A-DC-2-B-3 RG3-1A-DC-1-B PB-1A-DC-2-RDL RC-1A-DC-1-AL RD2-1A-DC-1-AL SRA1-1A-DC-1-NN-2 TA2-1A-DC-5 TB1-2H-DC-6 SB-1B-DC-3-R SRB1-1G-DC-1-NN SRC1-1B-DC-1-B SRD1-2A-DC-1-BGN TE6-1A-DC-1-UL RF3-1A-DC-2-GL SRA1-2F-DC-1-NN SRD2-2F-DC-1-RNN