
Part Number : 901200128
Product Description : 2.54mm Pitch C-Grid III Header, Single Row, Vertical, 8 Circuits, Tin (Sn) Plating
Series Number : 90120
Status : Active
Product Category : PCB Headers and Receptacles

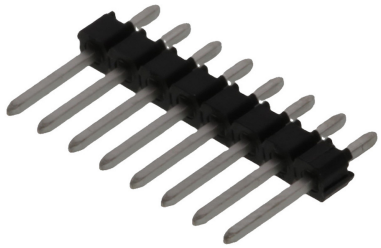

Documents & Resources

Drawings

Drawing_901200128_sd.pdf
Packaging Design Drawing_PK-90120-100-001.pdf

3D Models and Design Files

3D Model_901200128_stp.zip

Specifications

Application Specification_901190001-AS-000.pdf
Product Specification_PS-99020-0001-001.pdf

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 33; 34; 63
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	90120
Description	2.54mm Pitch C-Grid III Header, Single Row, Vertical, 8 Circuits, Tin (Sn) Plating
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Family	C-Grid and C-Grid III Connector Products
Product Name	C-Grid III
UPC	800753720473

Agency

CSA	LR19980
UL	E29179

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	350V AC/DC

Physical

Breakaway	Yes
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	30

First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	0.466/g
Number of Rows	1
Orientation	Vertical
Packaging Type	Tray
PC Tail Length	2.90mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	No
Temperature Range - Operating	-55° to +125°C
Termination Interface Style	Through Hole

Solder Process Data

Max-Duration	5
Lead-Free Process Capability	WAVE
Max-Cycle	1
Max-Temp	260

Mates With / Use With

Mates with Part(s)

Description	Part Number
C-Grid III Vertical Single Row PC Board Connectors	90147
C-Grid III Right-Angle Single Row PC Board Connectors	90148
C-Grid III Modular Single Row Crimp Housings	90123

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

0436400901 190670071 398800403 430451220 190990010 397730002 759001161 760475001
151670255 190690096 430450225 447641402 447642001 0190690033 152660117 447691602
5046940301 0436802002 152670357 190730231 190990009 151660057 436803002 0190700155
152670269 417920538 439151216 444280402 152670251 459705185