


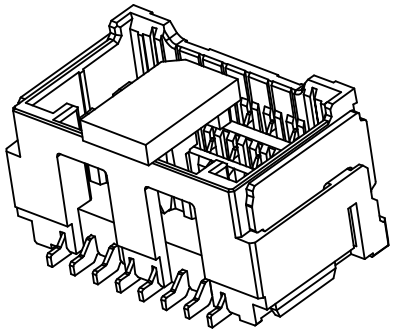


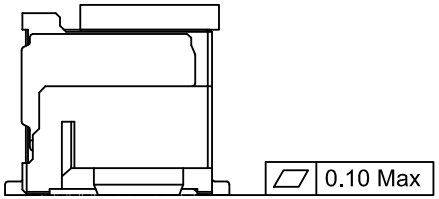

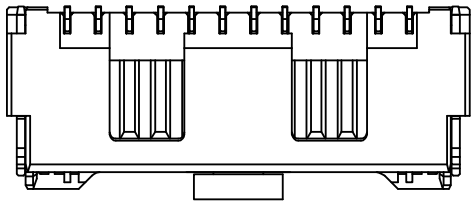


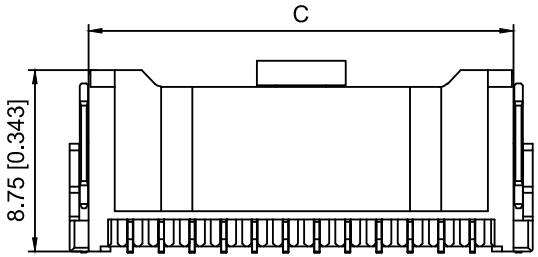


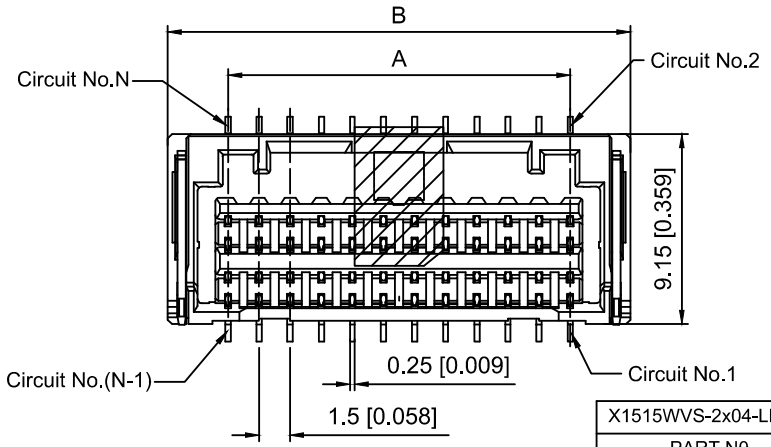

Specifications:
规格：
Voltage rating:100V AC/DC
额定电压：100V AC/DC
Current rating:1.5A AC/DC
额定电流：1.5A AC/DC
Withstanding voltage:500V AC/minute
耐受电压：500V AC/分钟
Temperature range:-40℃-+105℃
温度范围：-40℃-+105℃
Insulation resistance:≥500MΩ
绝缘电阻：≥500MΩ
Contact resistance:≤20mΩ
接触电阻：≤20mΩ

X1515 W V S- 2x04 - LP SW
① ② ③④ ⑤ ⑥ ⑦

1.Series No
2.Category:W-Wafer
3.Welding Board Angle:V-Stright 180°
4.Welding Way:S-SMT
5.Row No.Pin No:2xXX-2x04~2x14P
6.Material:LP-LCP UL94V-0 (Natural)
7.Plating:SW- Matte Tin Plated

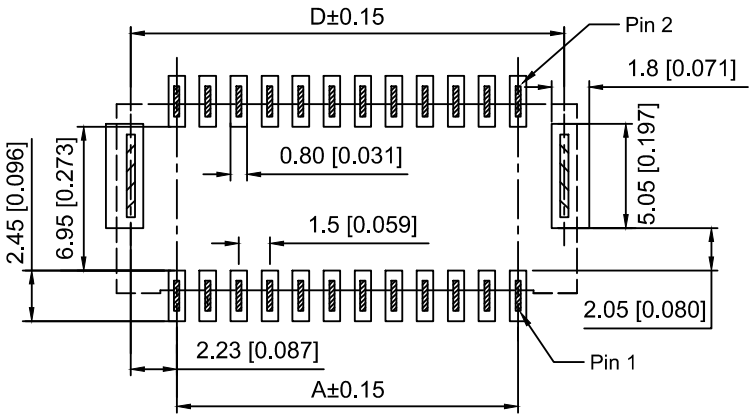


Recommended PCB Layout
Tolerance:±0.05




| Poles | Dimensions(mm) | | | |
|---|---|---|---|---|
| | A | B | C | D |
| 2x04 | 4.50 | 10.30 | 8.50 | 8.95 |
| 2x05 | 6.00 | 11.80 | 10.00 | 10.45 |
| 2x06 | 7.50 | 13.30 | 11.50 | 11.95 |
| 2x07 | 9.00 | 14.80 | 13.00 | 13.45 |
| 2x08 | 10.50 | 16.30 | 14.50 | 14.95 |
| 2x09 | 12.00 | 17.80 | 16.00 | 16.45 |
| 2x10 | 13.50 | 19.30 | 17.50 | 17.95 |
| 2x11 | 15.00 | 20.80 | 19.00 | 19.45 |
| 2x12 | 16.50 | 22.30 | 20.50 | 20.95 |
| 2x13 | 18.00 | 23.80 | 22.00 | 22.45 |
| 2x14 | 19.50 | 25.30 | 23.50 | 23.95 |

| X1515WVS-2x04-LPSW | LCP | Phosphor Bronze | X1515H-A |
|---|---|---|---|
| PART N0 | Material | Material(Pin) | Suitable XKB Housing |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED |
|---|---|---|---|---|
| | | | | |
| ΔX | | | | |
| ΔX | | | | |
| ΔX | | | | |

REVISIONS

| UNSPECIFIED TOLERANCES | |
|---|---|
| ANGLAR | ±5° |
| L≤ 4 | ±0.2 |
| 4<L≤ 16 | ±0.3 |
| 16<L≤ 63 | ±0.4 |
| L> 63 | ±0.5 |

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB INDUSTRIAL PRECISION CO.,LIMITED

| | | | |
|---|---|---|---|
| DSND | | SCALE: N/A | MODEL TYPE: 1.5mm Crimp Style Connector |
| DWN | | VIEW: | PART NO.: X1515WVS-2x04-LPSW |
| CHKD | | UNIT: mm/in | DWG NO.: X-X1515WVS-2x04-LPSW |
| APPD | | SIZE: A4 | |

| WEIGHT | SHEET | REVISION |
|---|---|---|
| | 1/1 | A0 |