


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/04/11	XXXXXX	INITIAL RELEASE

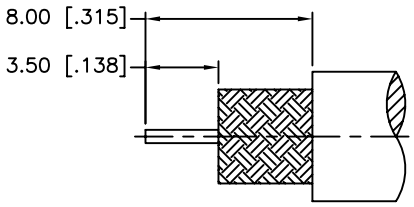

RECOMMENDED
CABLE STRIPPING DIM'S

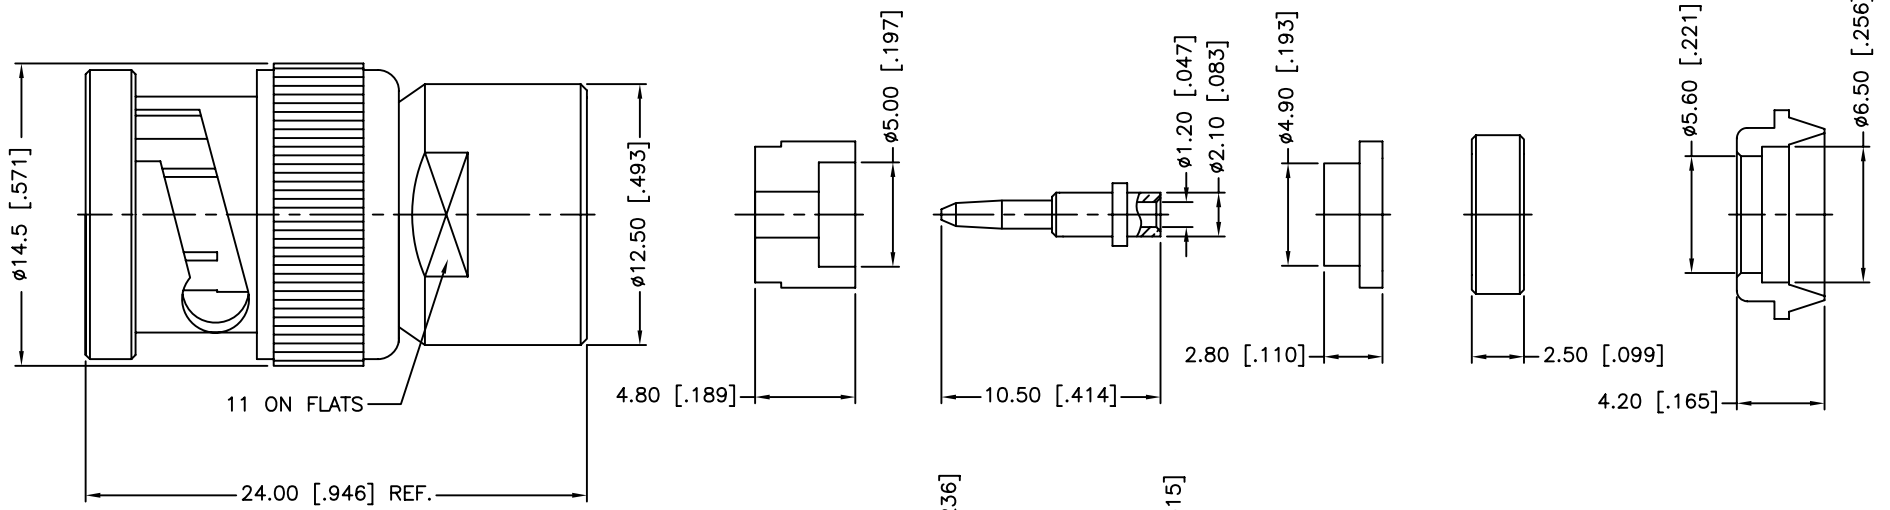

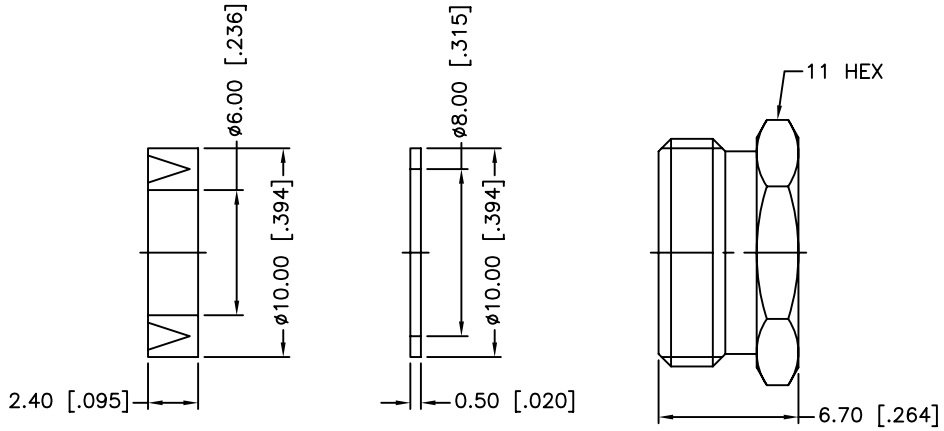

1 .CONTACT PIN TO SOLDER

	DESCRIPTION	MATERIAL	FINISH	QTY
14	HEX NUT	BRASS	NICKEL	1
13	WASHER	BRASS	NICKEL	1
12	GASKET	SILICONE	RED	1
11	BRAID CLAMP	BRASS	NICKEL	1
10	RING	BRASS	NICKEL	1
9	INSULATOR	DELRIN	NATURAL	1
8	CONTACT PIN	BRASS	GOLD	1
7	INSULATOR	DELRIN	NATURAL	1
6	WASHER	BRASS	NICKEL	1
5	SPRING	SK5	NICKEL	1
4	RETAINER RING	BRASS	NICKEL	1
3	GASKET	RUBBER	RED	1
2	BODY	BRASS	NICKEL	1
1	SHELL	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	01/04/11
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/CONNEX/112335.DWG

Amphenol Connex

PART DESCRIPTION
BNC CLAMP PLUG
(FOR RG-59/U CABLE)

PART NO. 112335

DWG. NO. 112335.DWG | REV. NC | SIZE A | SCALE NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

DEM09P032N 86093968191755E3LF 86093968813H45V1LF 863013A 86093488314745V1LF 95157-140LF DCMF37P 68001-108HLF D15P13A6RV12LF 68000-236HLF 68001-200HLF 69192-408HLF 70218-1116LF 76384-316LF RJE061661210 54202-G0805CLF 67996-204HLF 70234-112LF 70430-164LF 86093967896755LF 86130202123355E1LF DAPO15S365TLF LD25S33E4GV00LF 65781-158 68002116HLF LD15P33E4GV00LF RJSBE5080C2 54202-S08-07LF 91614-403ALF CD15S13E4RV09LF