


CAD FILE:


技术指标(Technical Index):


1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena)
2. 锁扣窗口：2～3PIN为1个，≥4PIN为2个.(Lock Configuration: 2 to 3Pin is 1, ≥4Pin is 2)
3. 不同Pin位吸盖加入/取出力有差异，实属正常现象.
(It is normal that there are differences between suction cap and suction cap at different Pin positions)
4. 温度范围(Temperature range)：-65° C～125° C.
5. 额定电压(Rated voltage)：125V，AC/DC(=等效).
6. 接触电阻(Contact resistance)：≤0.02Ω.
7. 绝缘电阻(Insulation resistance):≥100MΩ
8. 产品料号(Product material No.)：

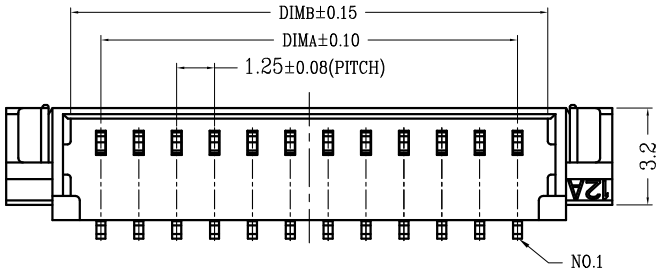


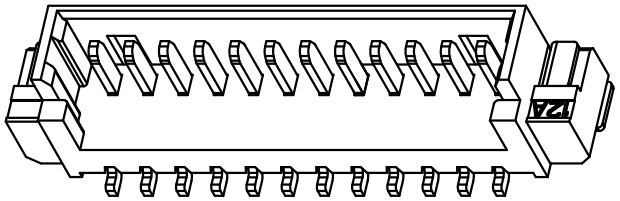

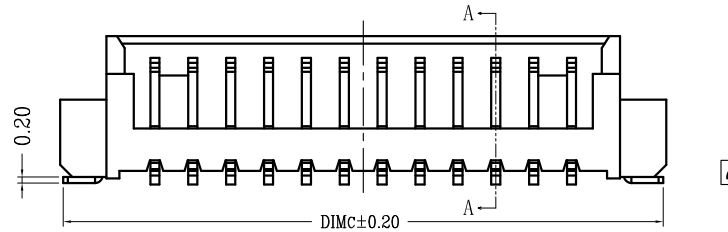






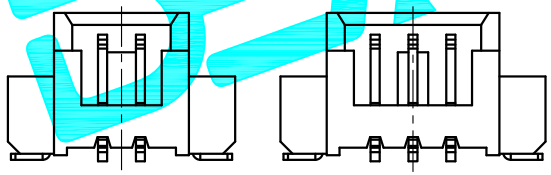

LOCK CONFIGURATION (锁扣位置)

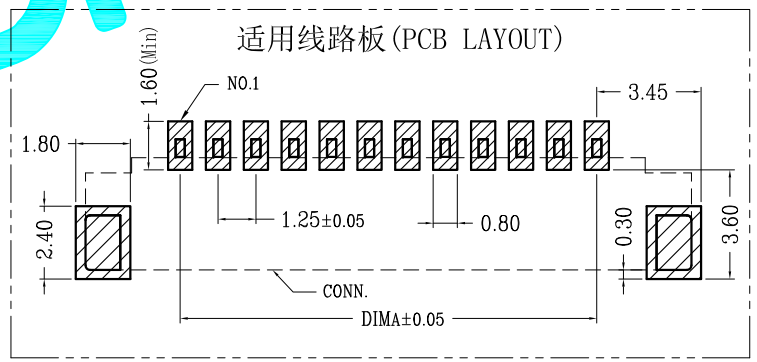

CKT	DIM A	DIM B	DIM C	DIM D
2	1.25	3.25	7.30	7.50
3	2.50	4.50	8.55	8.75
4	3.75	5.75	9.80	10.00
5	5.00	7.00	11.05	11.25
6	6.25	8.25	12.30	12.50
7	7.50	9.50	13.55	13.75
8	8.75	10.75	14.80	15.00
9	10.00	12.00	16.05	16.25
10	11.25	13.25	17.30	17.50
11	12.50	14.50	18.55	18.75
12	13.75	15.75	19.80	20.00
13	15.00	17.00	21.05	21.25
14	16.25	18.25	22.30	22.50
15	17.50	19.50	23.55	23.75
16	18.75	20.75	24.80	25.00
17	20.00	22.00	26.05	26.25
18	21.25	23.25	27.30	27.50
19	22.50	24.50	28.55	28.75
20	23.75	25.75	29.80	30.00

APPROVALS		DATE
DRAWN	G.M.Chen	2015/7/17
CHECKED		
APPROVALS		

DEALON 德之隆® ELECTRONICS CO.,LTD

TITLE: 1.25 Pitch 立式

PART NO. 1.25-口口PS

UNIT: mm SCALE: 1:1 SHEET 1 OF 1

DRAWING NO. ——— PROJ:

TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~5 ±0.10; ANGLE ±2°

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	A	———	NEW	———	———	———

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

DEALON:

PH-2PWB USB-TYPE-C-019 DM254R-11-04-85 DW254S-22-04-85 DZ254S-11-02-48 DZ254S-11-03-48 USB-TYPE-C-009 USB-TYPE-C-018 1.25-3PS DW254W-11-06-85 DZ127R-11-06-25 DZ254R-11-04-63 1.25-3PWB 1.25-4PWB 1.25-5PWB 1.25-8PWB DW127R-22-12-23 DZ254S-22-04-75 DZ254R-11-09-63 MK-12C01-G1.5 XH-4A XHB-2A DW254S-22-06-85 XH-2PWB XH-4PS XH-4PWB 1.0-4PWB 1.25-4PS 1.25-5PS DZ127S-22-06-55