

Radiall	TECHNICAL DATA SHEET	617030

Series		Issue:	Page
EPX	SIZE 15 SOCKET COAX CONTACT FOR RG316 CABLE, FILECA F1709/8 CABLE AND FILECA F1709/6 CABLE, RG188 AND RG179 CABLE	July. 23, 2014	1/1

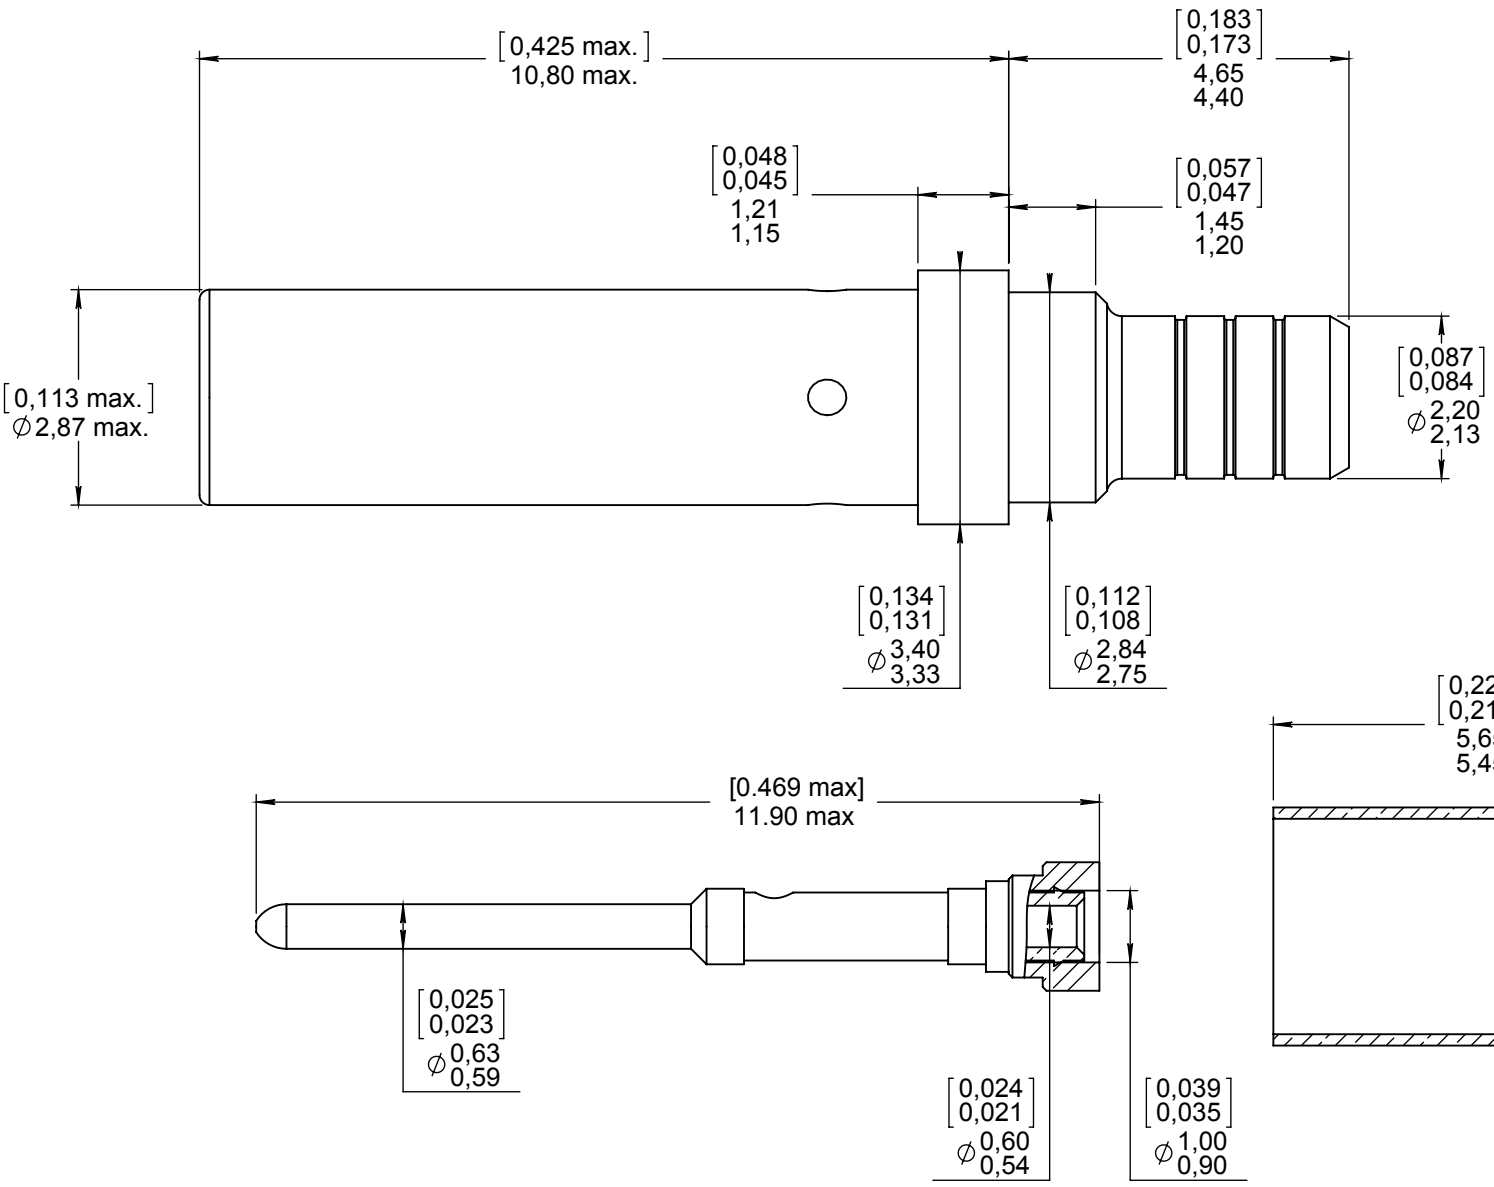

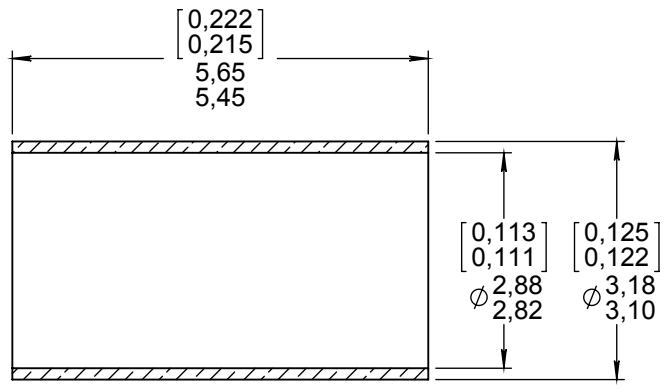

MATERIALS & FINISHES :

Outer, center contacts & ferrule : Copper alloy ; Gold over Nickel plated.
Sleeve : stainless steel ; passivated.
Insulators : PTFE

WIRING INSTRUCTION : See RP4185

CHARACTERISTIQUE IMPEDANCE :

- Contact : 23 Ω

- RG316 cable, FILECA F1709/6 cable, RG188 cable : 50 Ω
- FILECA F1709/8 cable, RG179 cable : 75 Ω

DIMENSIONS : mm (inch are given for information only)

Estimated weight : 0.47 g

CREATION				
PEN:	July 23th, 14	KX22 cable replaced by RG316 cable KX22 is only for french standards and cable impedances added	Moutault	Vieira
NOM: L . FALETTI	Jan 20, 14	Title updated : contact impedance added	Pailot N.	Legloahec Y
DATE: Sept 4, 87	Aug 25, 08	Add RG179 CABLE	Pailot N.	Legloahec Y
APPR.:	Dec 7, 07	Add RG188 CABLE	Surault	Pessard M.
	Issue	Revisions	Name	Approved

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL
This information is given as an indication.In the continual goal to improve our products,we reserve the right to make any modifications judged necessary.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radiall:
617030