




REV.	SPECIFICATION	ECN NO.	APPD.







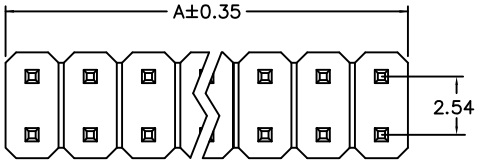


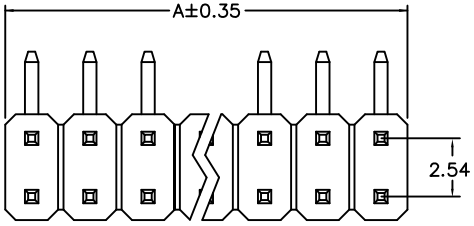


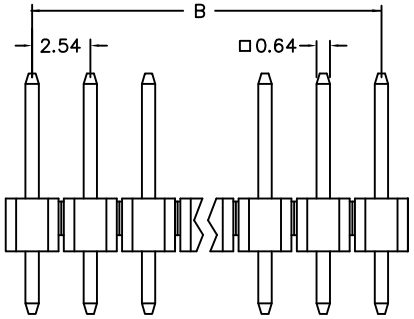



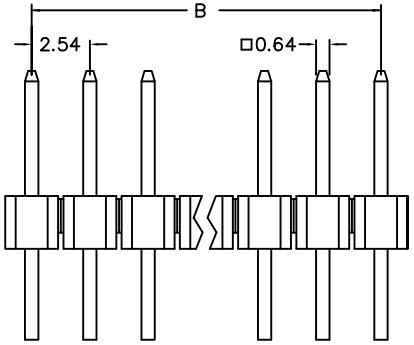

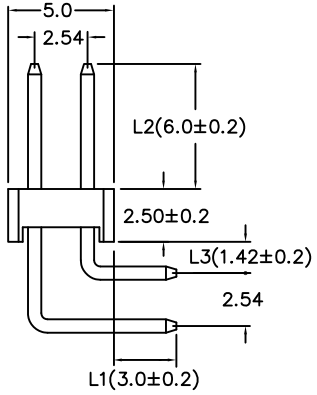

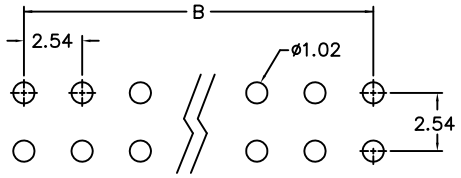

P.C. Board Layout

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 3 AMP.
Dielectric Withstanding Voltage: AC 1000V for 1 minute.
Insulator Resistance: 5000MΩmin. at DC 500V.
Contact Resistance: 20mΩmax. at DC 100mA .
Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

2011-	2	X	xx	G	00	x	B
Series	Double Row		No. of Pin Per Row	G: Gold Plated T: Tin Plated	00: G/F 10: 10 μ″ 15: 15 μ″ 30: 30 μ″	S: Straight R: Right Angle	B: Bulk Package

Custom Design: Straight (i.e 2011-2X40G00S-L1-L2)
: Right Angle (i.e 2011-2X40G00R-L1-L2-L3)

Position	4 Thru 80
Dimension	
A	2.54 X No. of Positions/2 −0.25
B	2.54 X No. of Positions/2 −2.54

Tolerances	Dwg No.	2011D01004	Title: 2011 Series Pin Header 2.54mmX2.54mm	OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
x = ±0.5 .x = ±0.25 .xx = ±0.15	Projection			P/N: 2011−2XxxG00xB
	Unit mm	Scale 1:1		SHEET 1/1 Ver.No. A9
	Drawn By	Vic Lyu10/21'15	① 535	