
Power PCB Relay T9V Solar

- **1 pole 40A, 1 form A (NO) contact**
- **Contact gap >1.8mm (suffix S)**
- **350mW hold power[1)]**
- **Ambient temperature up to 85°C at 35A**
- **The appliance is able to meet VDE V 0126-1-1**
- **Product in accordance to IEC 60335-1**
- **EN61095: AC7a at 85°C**

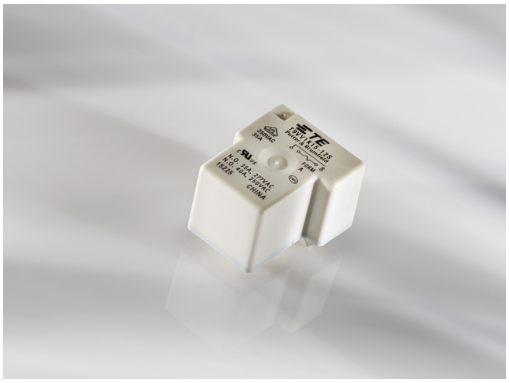

f0156_bc_inv

Typical applications
Electrical vehicle loading stations
Electrical vehicle
Photovoltaic inverter

Approvals

VDE 40030974, UL E58304, CQC16002145203, TUV R50369970
Technical data of approved types on request

Contact Data

Contact arrangement	1 form A (NO)
Contact gap	>1.8mm
Rated voltage	277VAC (1.8mm gap)
Rated current	40A[2)]
Breaking capacity max.	10 000 VA
Contact material	AgNi
Initial contact resistance	75mΩ max. at 1A 6VDC
Frequency of operation, with/without load	6/300min^{-1}
Operate/release time max., incl bounce time	18/15ms

Contact ratings[3)]

Type	Contact	Load	Cycles
IEC 61810			
T9VV1K15-12S	A (NO)	35A, 250VAC, cosφ=1, 85°C	20x10^3
UL 508			
T9VV1K15-12S	A (NO)	35A, 250VAC, resistive, 85°C	20x10^3
T9VV1K15-12S	A (NO)	40A, 30VDC, resistive, 70°C	60x10^3
CQC			
T9VV1K15-12S	A (NO)	40A, 250VAC, resistive, 60°C	20x10^3
TUV			
T9VV1K15-12S	A (NO)	40A, 30VDC, resistive, 70°C	60x10^3

Mechanical endurance, DC coil	5x10^5 operations

Coil Data

Rated coil voltage	12VDC
Coil insulation system according UL	class F

Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power W
12	12[1)]	9.6	0.8	64+10%	2.25 / min. 0.35 hold

All figures are given for coil without pre-energization, at ambient temperature +23°C.
Other coil voltages on request.

Insulation Data

Initial dielectric strength	
between open contacts	2500V$_{rms}$
between contact and coil	4000V$_{rms}$
Initial surge withstand voltage	
between contact and coil	6kV
Clearance/creepage	
between contact and coil	3/4mm
Material group of insulation parts	III
Tracking index of relay base	PTI 325

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter	
Ambient temperature	-40 to +85°C[2)]
Category of environmental protection	
IEC 61810	RTII - flux proof
Vibration resistance (functional)	10g
Shock resistance (functional)	10g
Shock resistance (destructive)	100g
Terminal type	PCB-THT
Mounting	see note[2)]
Mounting distance	≥10mm
Weight	appr. 30g
Resistance to soldering heat THT	
IEC 60068-2-20	260°C/5s
Packaging unit	box/500 pcs.

1) After the energization time of 100ms with 12 VDC the coil requires a reduction of the coil voltage to 4.7...6.0 VDC.
2) The relay connections and wiring have to be designed with an adequate cross sections to ensure the current flow and heat dissipation.
3) Contact ratings with relay properly vented.

08-2019, Rev. 0819
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company


Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.


Power PCB Relay T9V Solar (Continued)

Dimensions

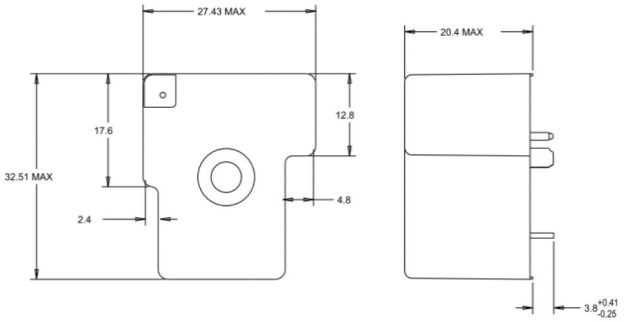

PCB layout / terminal assignment

Bottom view on solder pins

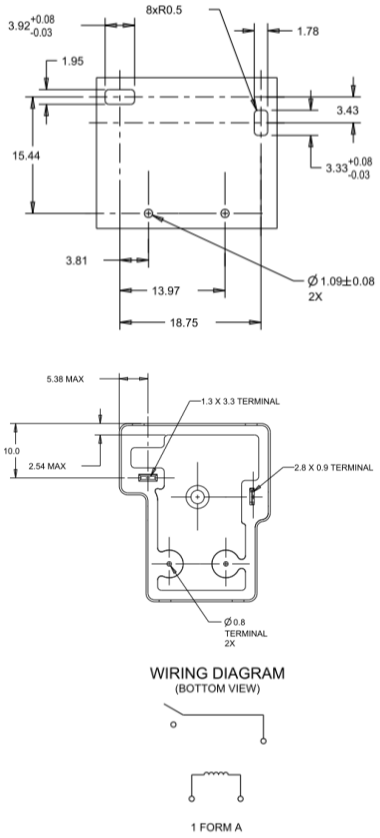

Notes

1) General tolerance

Diagram Dimension	Tolerance
< 1 mm	±0.1
1 ~ 3 mm	±0.2
> 3 mm	±0.3

2) Dimensions of the pins after tin soldering

a) +0.4 for the width and the thickness
b) +1.0 for the length

Product code structure

Typical product code: **T9V V 1 K 1 5 -12 S**

Type
T9V Power Relay T9V Series

Enclosure
V Flux-proof plastic case **S** Wash tight

Contact arrangement
1 1 Form A (1NO)

Coil input
K DC coil, 2.25W

Mounting and termination
1 PCB mounting; PCB terminals for coil and contacts

Contact material
5 AgNi

Coil voltage
Coil code: Please refer to coil version table

Contact gap
blank 1.5mm contact gap **S** 1.8mm contact gap

Product code	Version	Contact arrangement	Contact material	Contact gap	Coil	Part Number
T9VV1K15-12S	PCB, flux tight	1 form A (NO) contact	AgNi	>1.8mm	12VDC	2027395-5

Note. This list represents the most common types and does not show all variants covered by this datasheet, other types on request.

08-2019, Rev. 0819
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1393431-1 1903112-2 RH73H2A40MKTN TE50BR39J 2380312-2 CRGCQ2010J3K3 SBCHE64R7K SMW73R0JT 1743455-2 175977-2 917696-1 SBCHE154R7K 1969656-1 2-292161-3 MPT100C18RF 1-962915-1 2310537-1 3430B2F51RTDF 650075-000 ROX05SJ18R 3-1393225-0 3631B101LL CPF0402B37K4E1 2377783-2 2834055-1 936348-1 U5254-000005-030PA 1-794222-0 141991-2 2005330-1