ESD234-B1-W0201

Bi-directional ESD protection device, 5.5 V, 56 pF, 0201

Order now | Technical documents | Simulation | Support

Product description

This Infineon ESD (electrostatic discharge) protection device has a bi-directional and symmetric *I*/*V* characteristic and excellent clamping performance.

Feature list



- ESD / transient protection according to:
  - IEC61000-4-2 (ESD): ±19 kV (air) / ±19 kV (contact)
  - IEC61000-4-4 (EFT): ±2 kV / ±40 A (5/50 ns)
  - IEC61000-4-5 (Surge): ±7 A (8/20 µs)
- Bi-directional maximum working voltage: V_{WM} = ±5.5 V
- Line capacitance: C_L = 56 pF at f = 1 MHz
- Clamping voltage: V_{cl} = 12.5 V at I_{TLP} = 16 A with R_{dyn} = 0.15 Ω
- Very low leakage current: I_L =1 nA
- Small form factor SMD size 0201, low profile (0.58 x 0.28 x 0.15 mm^3)

Potential applications

- Keypads, touchpads, buttons, convenience keys, LCD displays, cameras, audio lines
- Mobile communication, notebooks, tablets, desktop computers, modules (WIFI, fingerprint, flash)

Product validation

Qualified for industrial applications according to the relevant tests of JEDEC47/20/22.

Device information




Figure 1 **Pin configuration with marking (bottom view)**

Table 1 **Part information**

Product name / Ordering code	Package	Pin configuration	Marking	Pieces / Reel
ESD234-B1-W0201/ESD234B1W0201E6327XTSA1	WLL-2-1	1 line, bi-directional	Y	15 k

Table of contents

Product description 1
Feature list 1
Potential applications 1
Product validation 1
Device information 1
Table of contents 2
1 Absolute maximum ratings 3
2 Electrical characteristics 4
3 Typical characteristic diagrams 6
4 Package information WLL-2-1 12
5 References 13
6 Revision history 13
Disclaimer 14

1 Absolute maximum ratings

Table 2 Absolute maximum ratings at T_A = 25°C, unless otherwise specified

Parameter	Symbol	Values		Unit	Note or test condition
		Min.	Max.		
Working voltage	V_{WM}	-5.5	+5.5	V	
ESD discharge voltage	V_{ESD} (contact)	-19	+19	kV	Discharge network: R = 330 Ω, C = 150 pF [1]
	V_{ESD} (air)	-19	+19		
Peak pulse power	P_{PK}	–	84	W	Stress pulse: 8/20 µs current waveform [2]
Peak pulse current	I_{PP}	-7	+7	A	
Operating temperature	T_{op}	-55	+125	°C	
Storage temperature	T_{stg}	-65	+150		

Attention**: **Stresses above the maximum values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings. Exceeding only one of these values may cause irreversible damage to the component.

1 Based on IEC61000-4-2.
2 Based on IEC61000-4-5.

2 Electrical characteristics

Note: *T_A = 25°C, unless otherwise specified. Device is electrically symmetrical.*

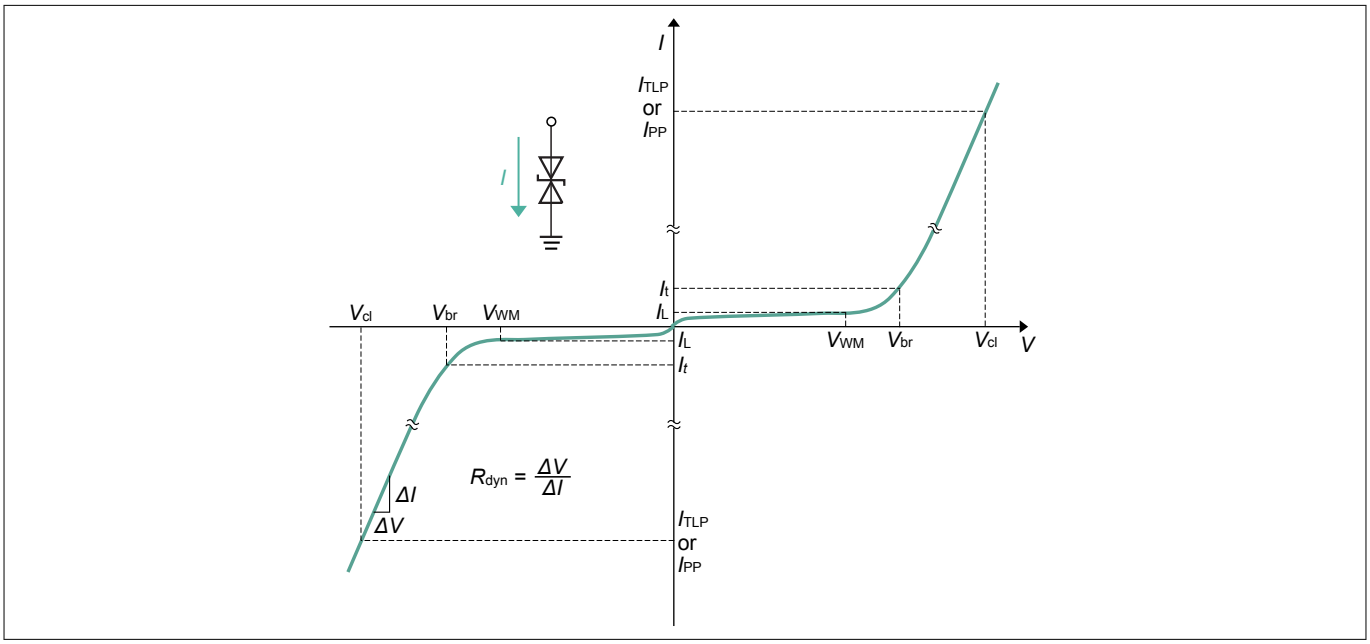


Figure 2 ***I/V* characteristic curve**

Table 3 ***I/V* characteristic parameters**

Symbol	Parameter
I_L	Leakage current
I_{PP}	Peak pulse current, based on IEC61000-4-5
I_t	Test current
I_{TLP}	TLP current
R_{dyn}	Dynamic resistance
V_{br}	Breakdown voltage
V_{cl}	Clamping voltage
V_t	Test voltage
V_{WM}	Maximum working voltage

2 Electrical characteristics

Table 4 DC characteristics

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Breakdown voltage	V_{br}	7.5	8.6	9.7	V	I_t = 1 mA
Leakage current	I_L	–	1	100	nA	V_{WM} = 5.5 V

Table 5 AC characteristics

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Line capacitance	C_L	45	56	67	pF	V = 0 V, f = 1 MHz
		–	56	–		V = 0 V, f = 1 GHz
Series inductance	L_S	–	<1	–	nH	Extracted from S-parameters

Table 6 Protection characteristics

Parameter	Symbol	Values			Unit	Note or test condition
		Min.	Typ.	Max.		
Clamping voltage (TLP) [3] [4]	V_{cl}	–	9.5	–	V	I_{TLP} = 1 A
		–	10.2	–		I_{TLP} = 4 A
		–	11	–		I_{TLP} = 8 A
		–	12.5	–		I_{TLP} = 16 A
		–	14.5	–		I_{TLP} = 30 A
Clamping voltage (8/20 µs) [5]		–	9.5	–		I_{PP} = 1 A
		–	10.5	–		I_{PP} = 3 A
		–	12	–		I_{PP} = 7 A
Dynamic resistance [3]	R_{dyn}	–	0.15	–	Ω	

3 TLP parameters: Z_0 = 50 Ω, t_p = 100 ns, t_r = 0.6 ns, averaging window 30-60 ns.
4 Refer to application note AN210 *[2]*
5 t_p = 8/20 µs. Stress pulse based on IEC61000-4-5.

3 Typical characteristic diagrams

Note: *T_A = 25 °C, unless otherwise specified.*

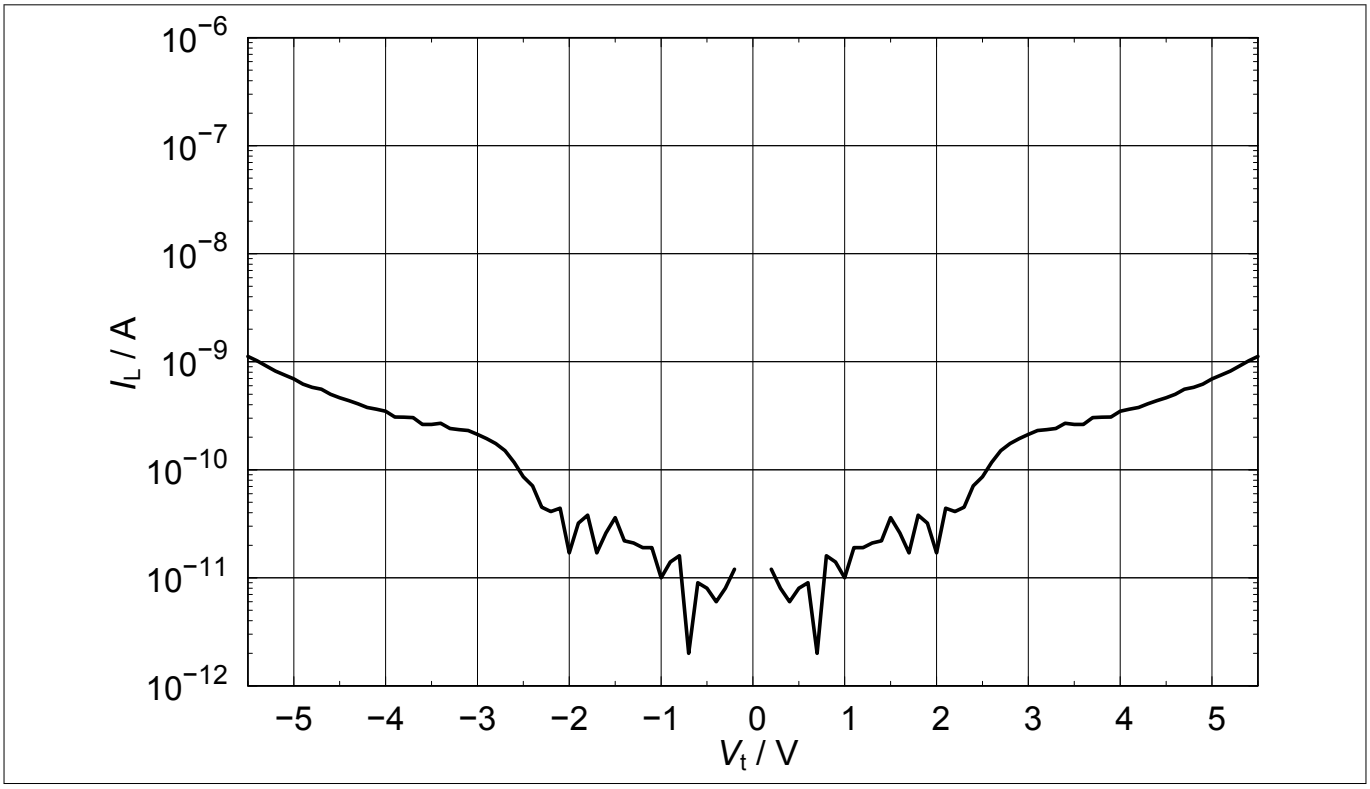


Figure 3 **Leakage current: I_L = f(V_t)**

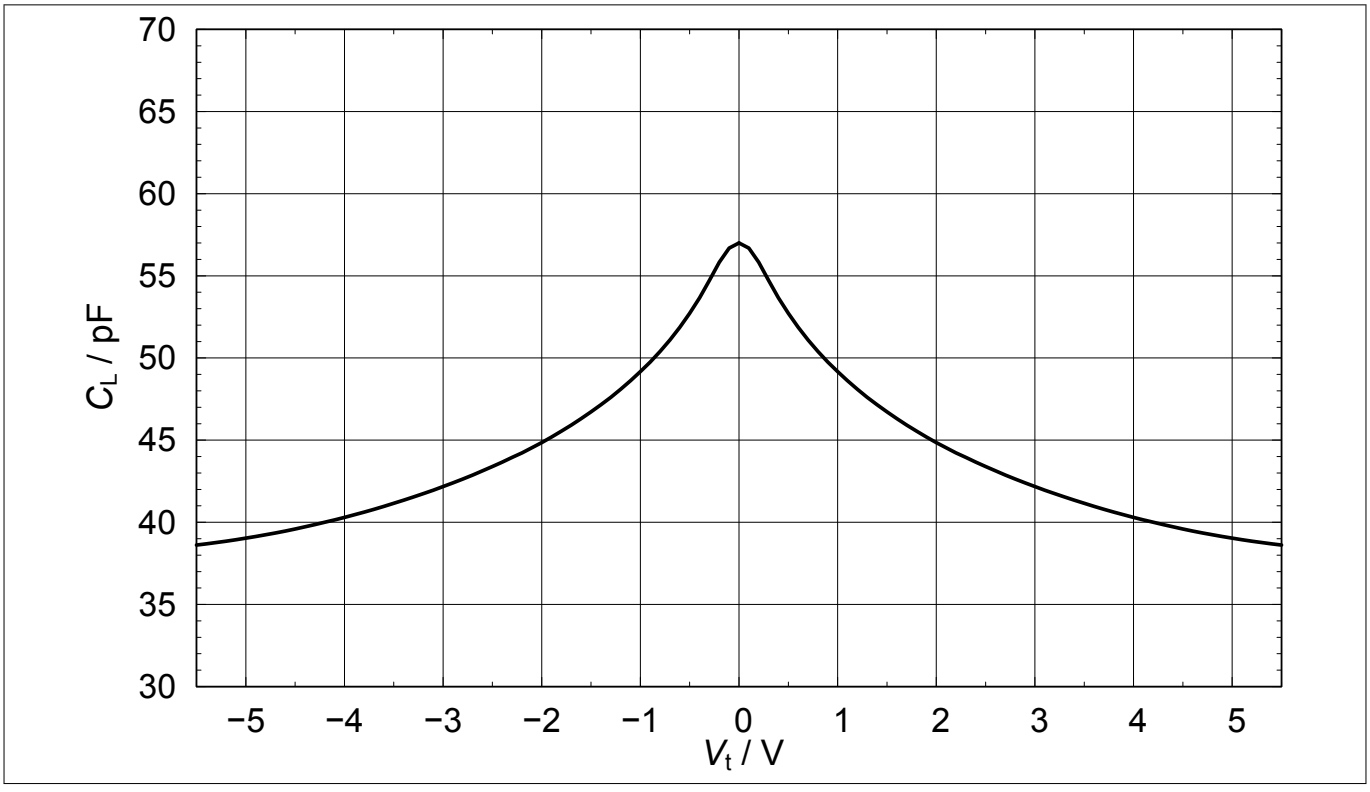


Figure 4 **Line capacitance: C_L = f(V_t), f = 1 MHz**

3 Typical characteristic diagrams

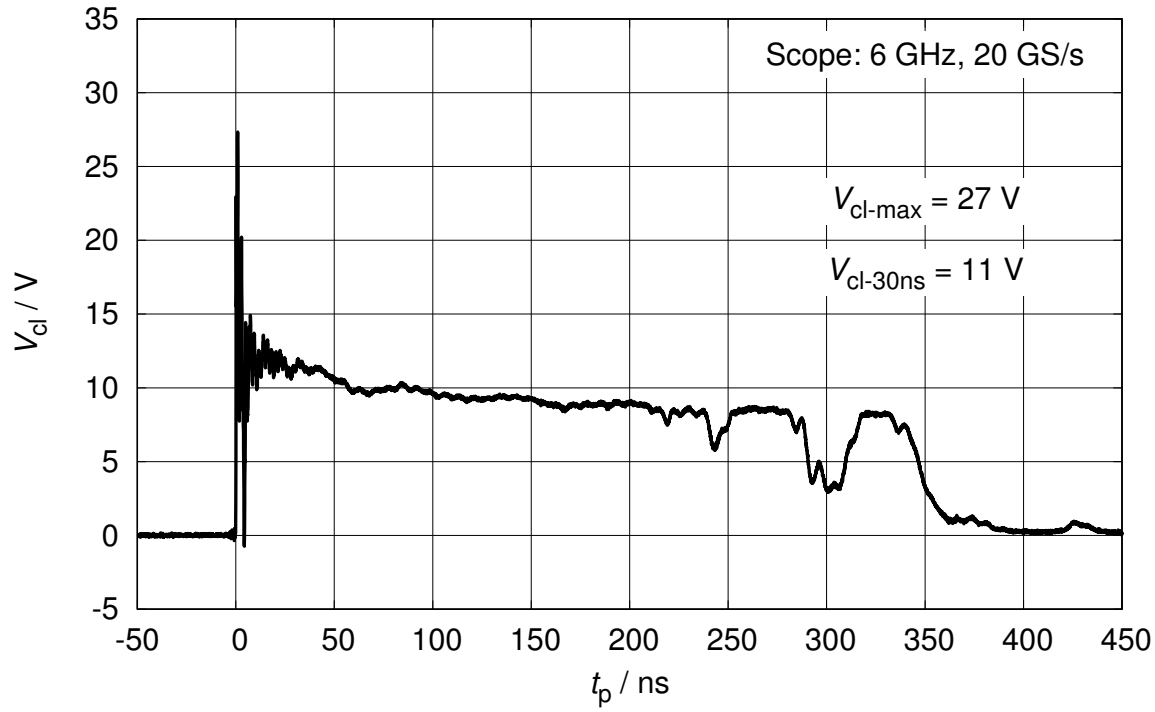


Figure 5 **Clamping voltage (ESD): V_{cl} = f(t_p), 8 kV positive pulse based on IEC61000-4-2**

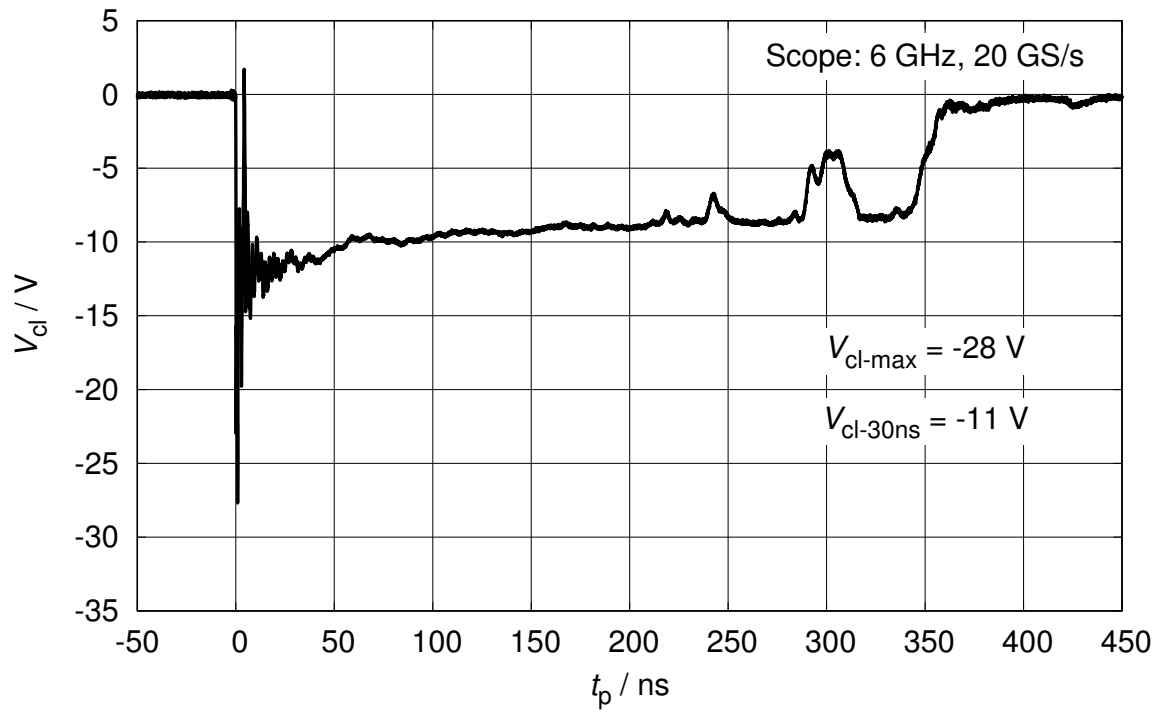


Figure 6 **Clamping voltage (ESD): V_{cl} = f(t_p), 8 kV negative pulse based on IEC61000-4-2**

3 Typical characteristic diagrams

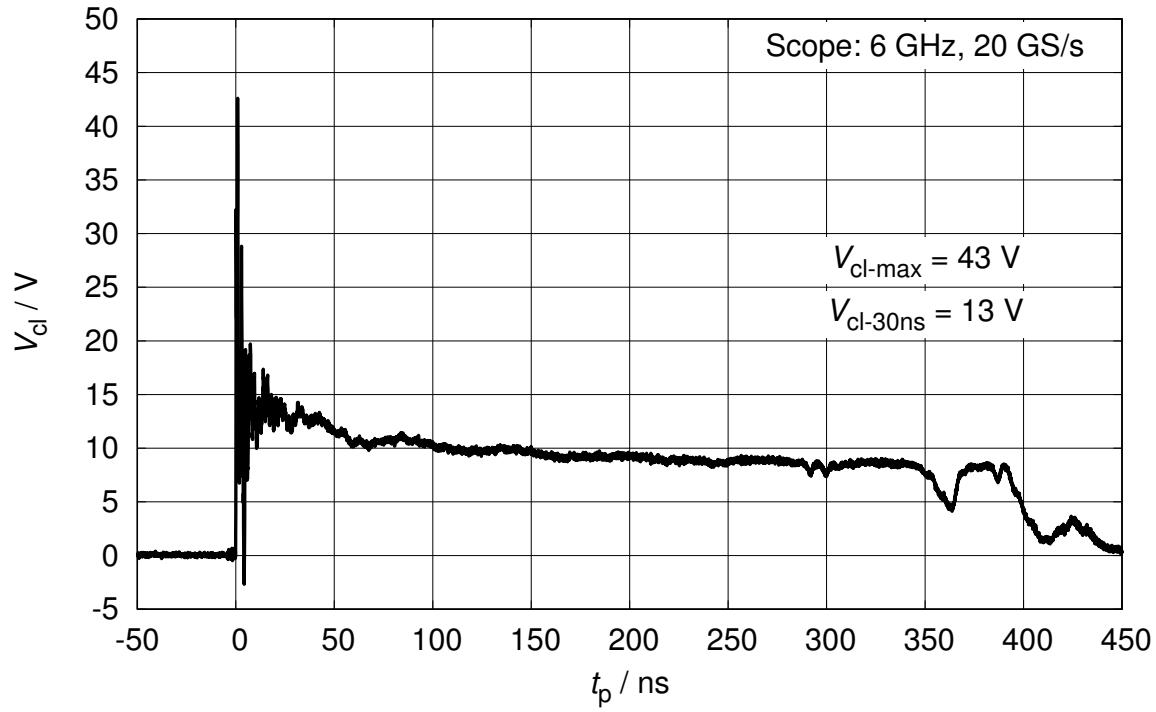


Figure 7 **Clamping voltage (ESD): V_{cl} = f(t_p), 15 kV positive pulse based on IEC61000-4-2**

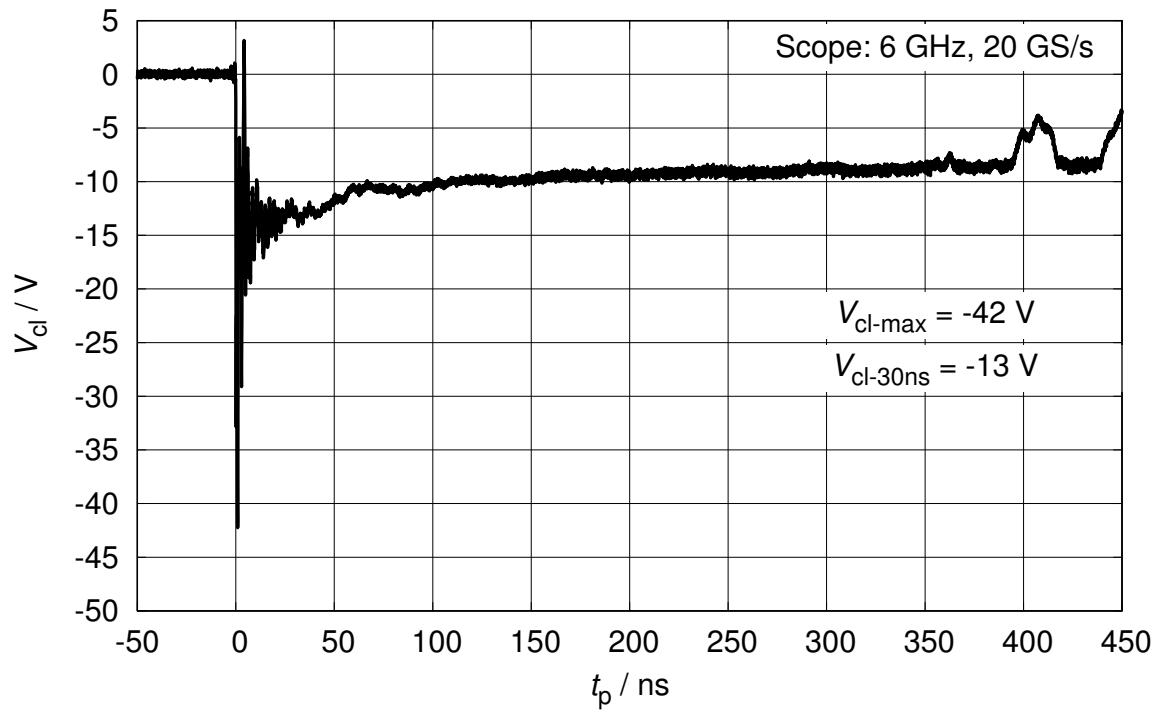


Figure 8 **Clamping voltage (ESD): V_{cl} = f(t_p), 15 kV negative pulse based on IEC61000-4-2**

3 Typical characteristic diagrams

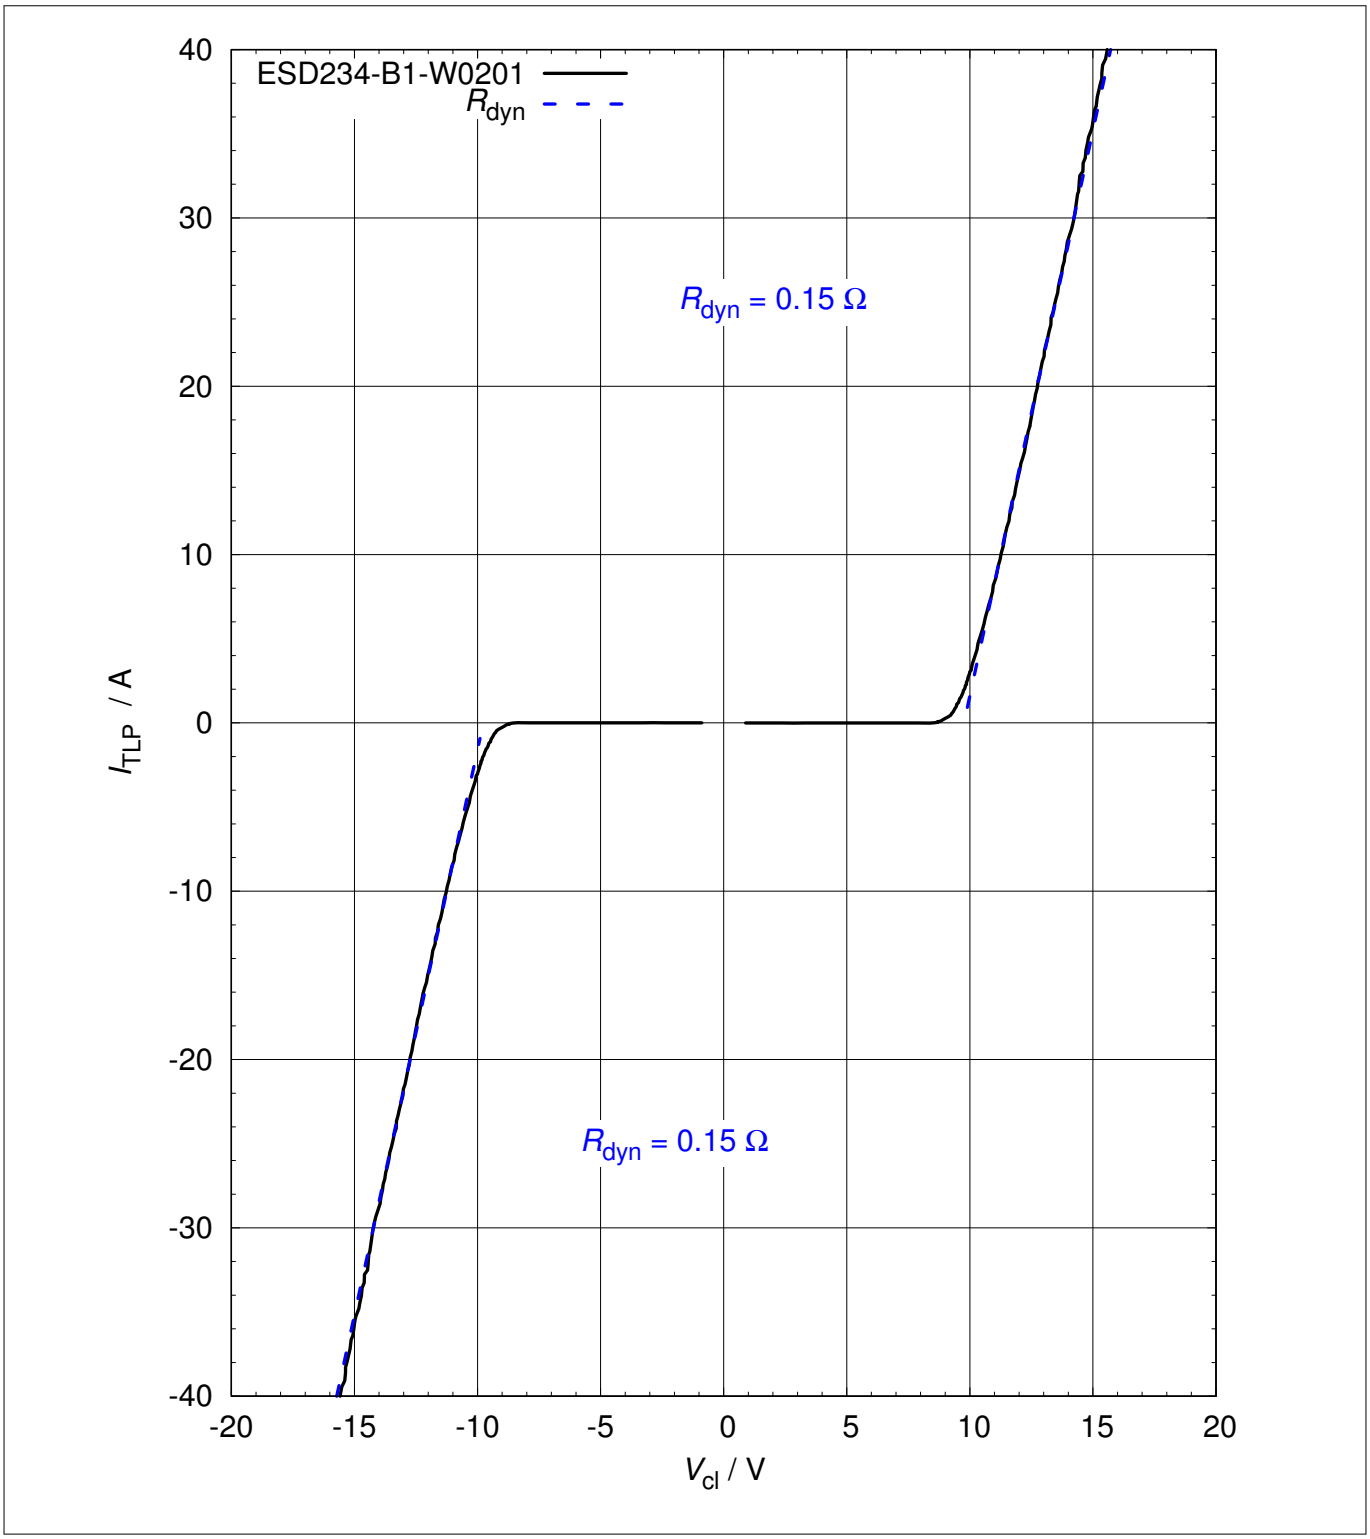


Figure 9 **Clamping voltage (TLP): I_{TLP} = f(V_{cl})**

3 Typical characteristic diagrams

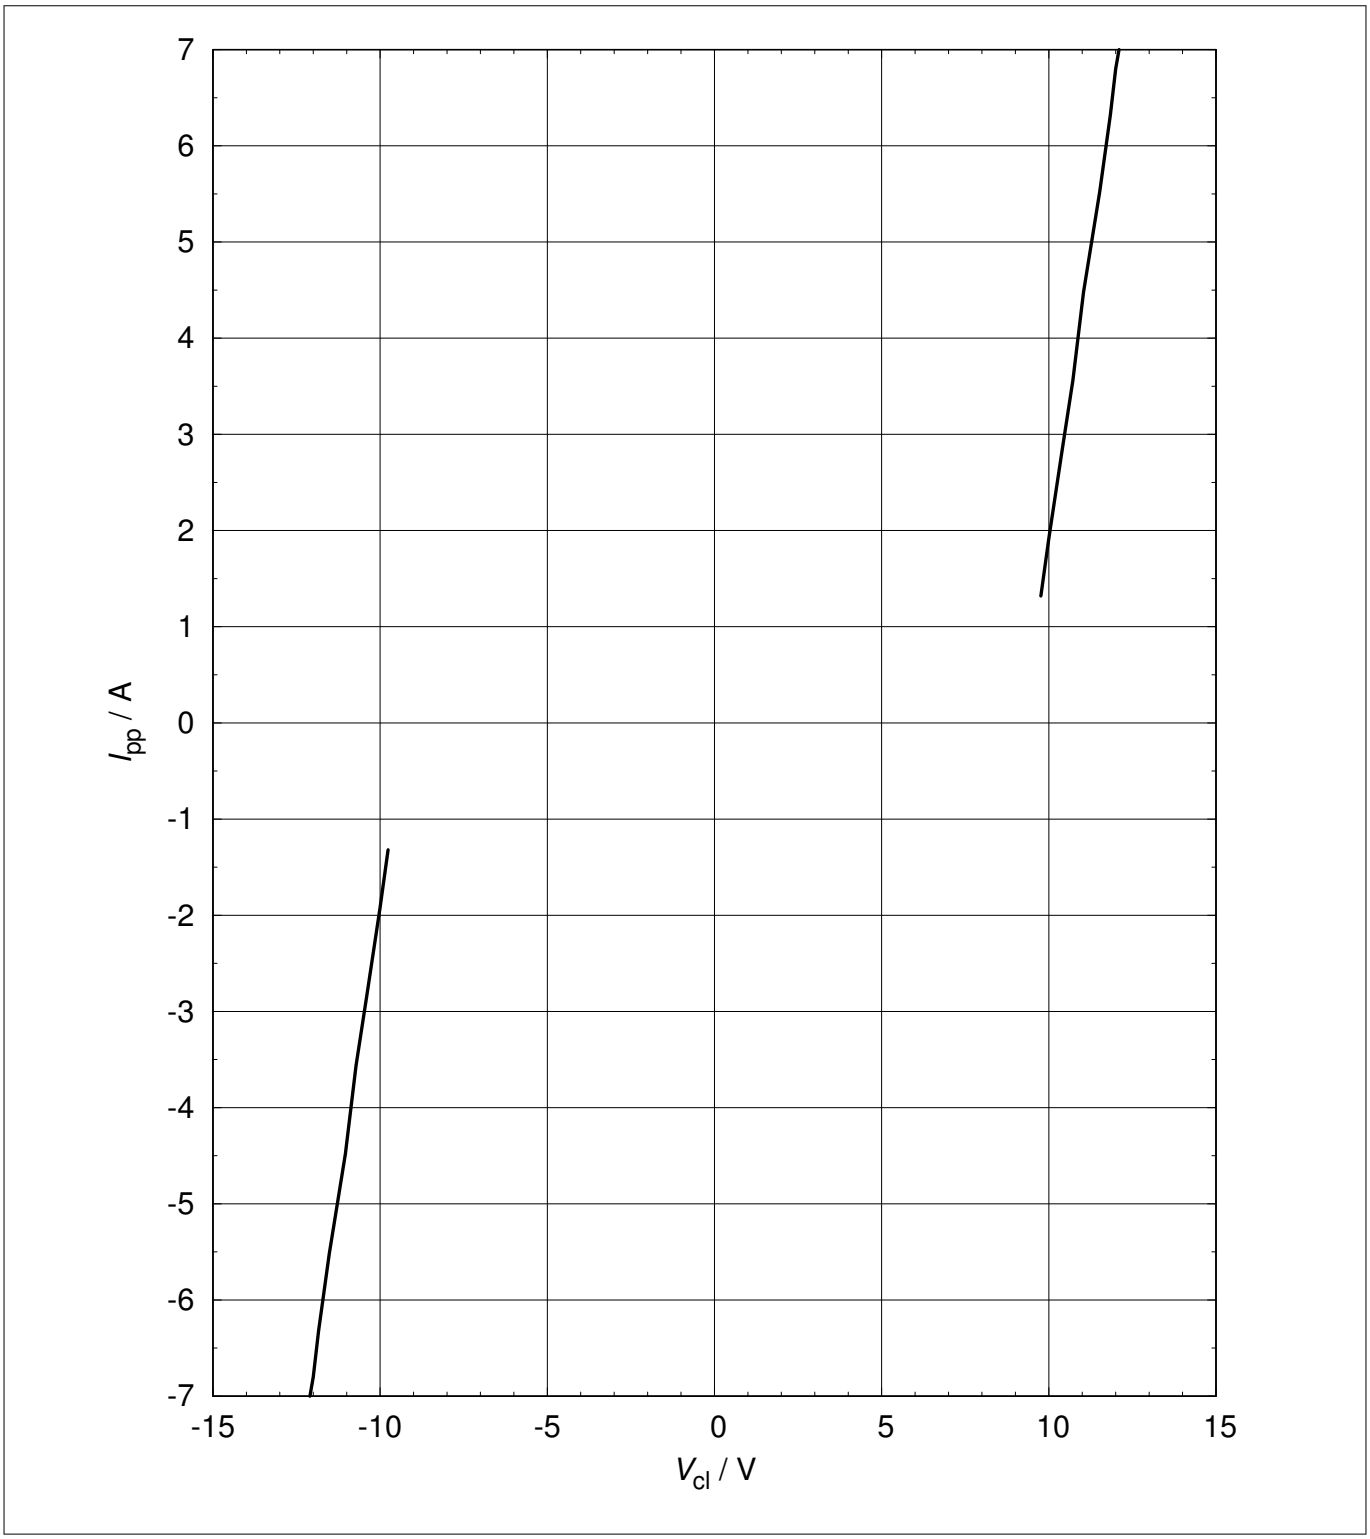


Figure 10 **Clamping voltage (Surge): I_{PP} = f(V_{cl}), based on IEC61000-4-5**

3 Typical characteristic diagrams

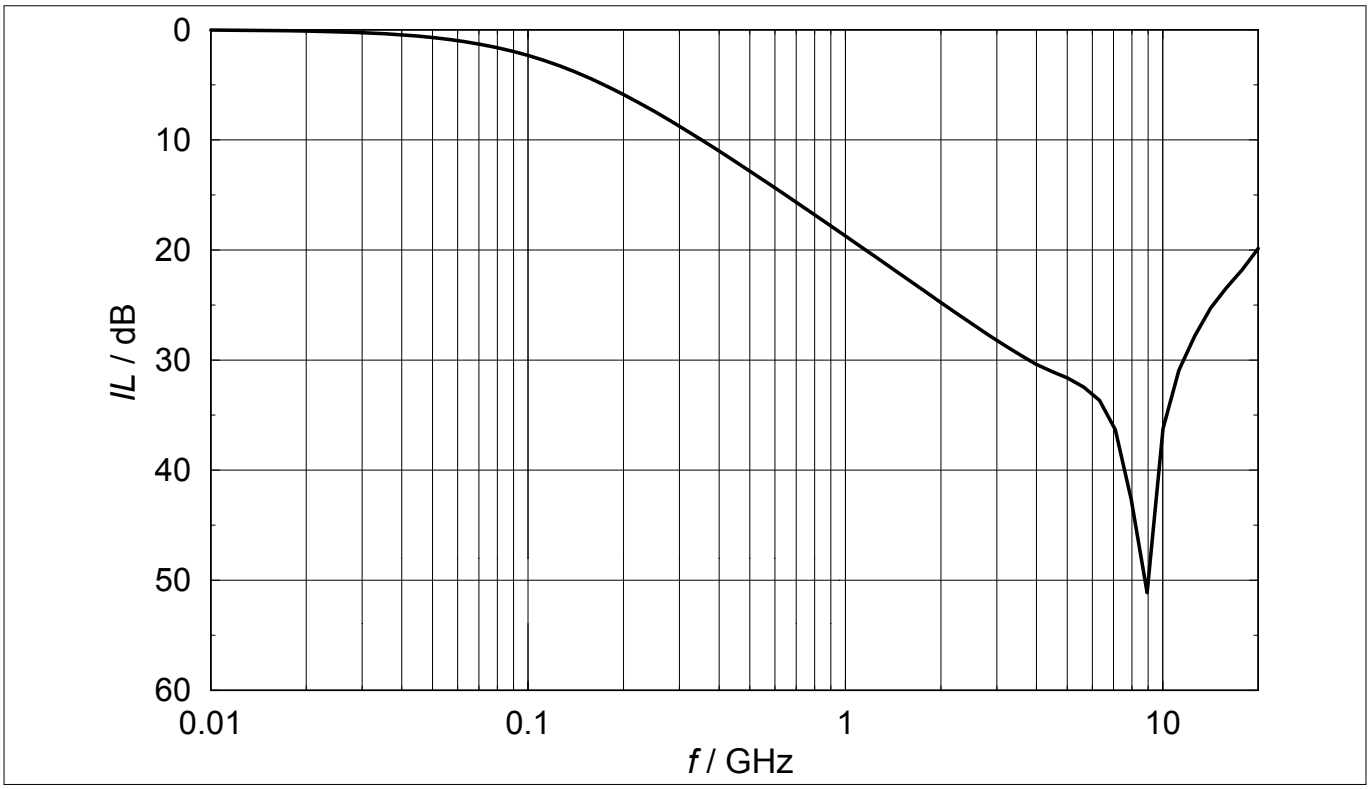


Figure 11 **Insertion loss: *IL* = f(*f*), measured in a 50 Ω system**

4 Package information WLL-2-1

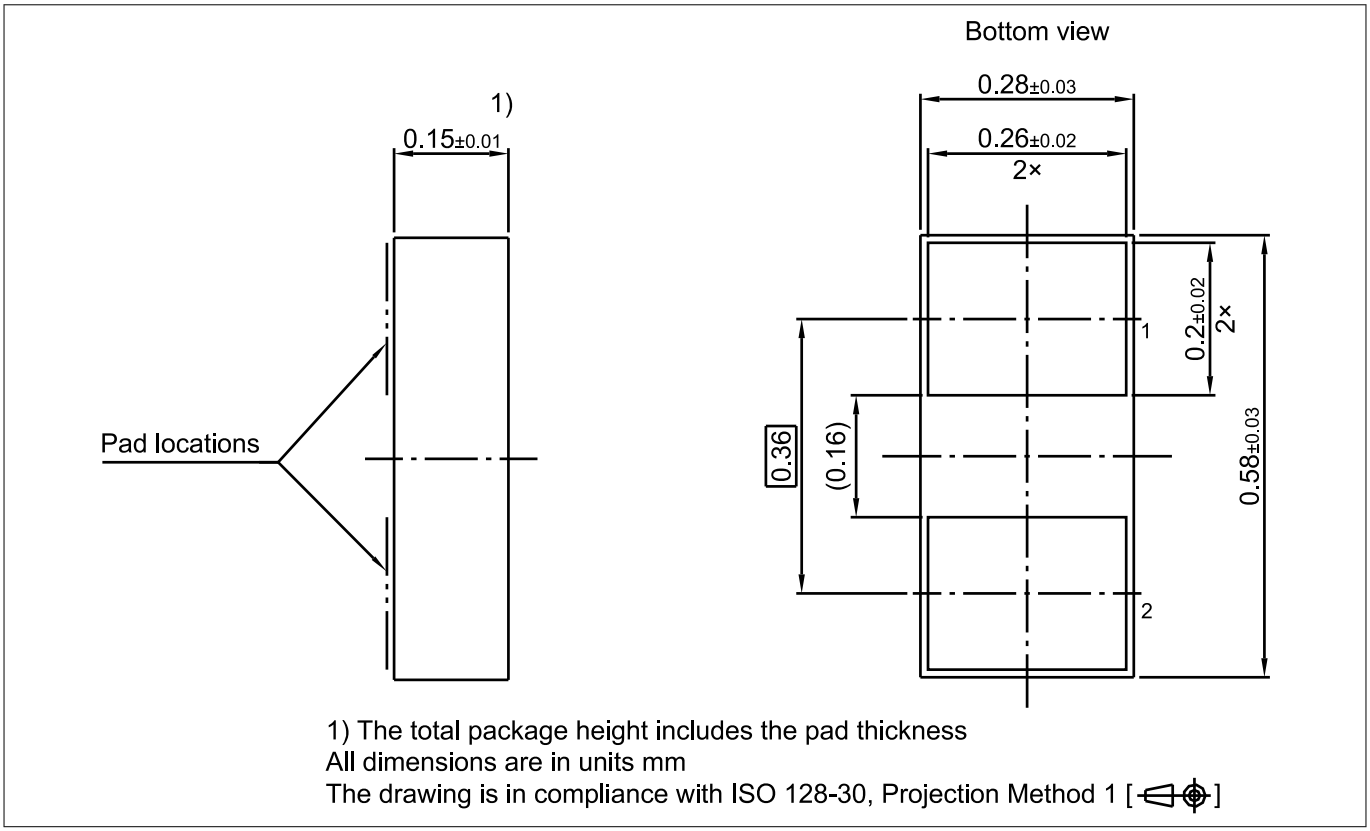


Figure 12 WLL-2-1 package

Note: For package information including footprint, packing and assembly recommendation refer to:

https://www.infineon.com/packages/SG-WLL-2-1/

5 References

[1]	Infineon AG - Understanding ESD protection device characteristics
[2]	Infineon AG - **Application note AN210**: Effective ESD Protection Design at System Level Using VF-TLP Characterization Methodology

6 Revision history

Document version	Date of release	Description of changes
1.0	2018-09-06	• Maximum ratings and electrical parameters updated • Insertion loss diagram added
2.0	2021-04-14	• New datasheet layout • V_{cl} (TLP) values at 4 A, 8 A added • Potential applications updated

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2021-04-14

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2021 Infineon Technologies AG

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-vbf1605186002252

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Infineon Technologies:

AIMW120R060M1HXKSA1 BGM781N11E6327XUSA1 BSZ050N03LSGATMA1 CY8C24894-24LTXI ISZ75DP15LMATMA1 TLE4971A120N5E0001XUMA1 FS75R12KE3B9BOSA1 IGCM10F60GAXKMA1 IRF3710PBF FS100R12KT4GPBPSA1 IPD60R650CEAUMA1 IPL60R185C7AUMA1 TC1782F320F180HRBAKXUMA2 TLE493DW2B6A0HTSA1 2EDS8265HXUMA2 IM241S6S1BAUMA1 IPB320P10LMATMA1 IPT014N08NM5ATMA1 BSC320N20NS3 G BTS 5210 G BTS70302EPADAUGHBRDTOBO1 TLF80511TCATMA2 SPP06N80C3 TLS208D1EJV33XUMA1 XMC4800F144K1024AAXQMA1 EVALPMG1B1DRPTOBO1 FP150R12N3T4PB81BPSA1 BAT5405WH6327XTSA1 CY8C29466-24PVXI IKD10N60RFATMA1