




RoHS

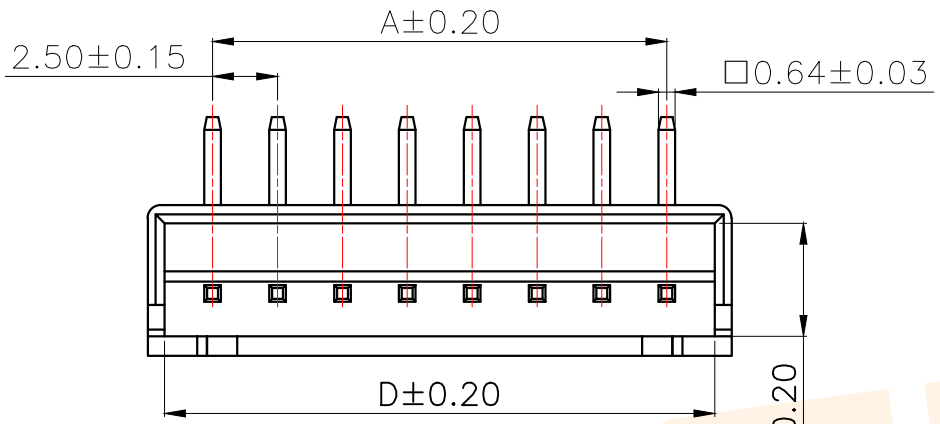

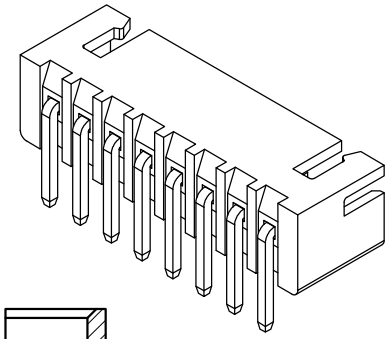



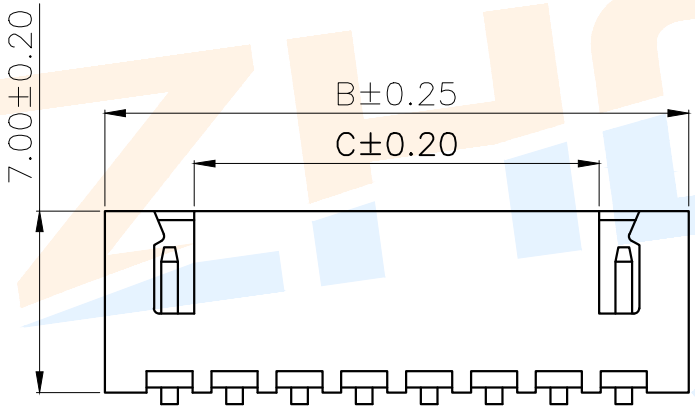


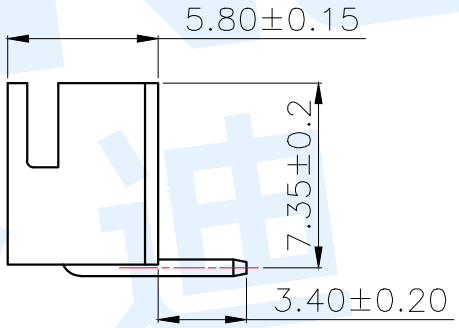


Model No.	Pin	A	B	C	D
WAFER-XH2.54-2PWZ-W	2	2.50	7.50		6.20
WAFER-XH2.54-3PWZ-W	3	5.00	10.00	3.00	8.70
WAFER-XH2.54-4PWZ-W	4	7.50	12.50	5.50	11.20
WAFER-XH2.54-5PWZ-W	5	10.00	15.00	8.00	13.70
WAFER-XH2.54-6PWZ-W	6	12.50	17.50	10.50	16.20
WAFER-XH2.54-7PWZ-W	7	15.00	20.00	13.00	18.70
WAFER-XH2.54-8PWZ-W	8	17.50	22.50	15.50	21.20
WAFER-XH2.54-9PWZ-W	9	20.00	25.00	18.00	23.70
WAFER-XH2.54-10PWZ-W	10	22.50	27.50	20.50	26.20
WAFER-XH2.54-11PWZ-W	11	25.00	30.00	23.00	28.70
WAFER-XH2.54-12PWZ-W	12	27.50	32.50	25.50	31.20
WAFER-XH2.54-13PWZ-W	13	30.00	35.00	28.00	33.70
WAFER-XH2.54-14PWZ-W	14	32.50	37.50	30.50	36.20
WAFER-XH2.54-15PWZ-W	15	35.00	40.00	33.00	38.70
WAFER-XH2.54-16PWZ-W	16	37.50	42.50	35.50	41.20
WAFER-XH2.54-17PWZ-W	17	40.00	45.00	38.00	43.70
WAFER-XH2.54-18PWZ-W	18	42.50	47.50	40.50	46.20
WAFER-XH2.54-19PWZ-W	19	45.00	50.00	43.00	48.70
WAFER-XH2.54-20PWZ-W	20	47.50	52.50	45.50	51.20

Specifications/技术规格:


1.Poles/线数：2～20P
2.Wire range/适用线规：AGW 28#～22#
3.Applicable PC board thickness/ 适用PC板厚度：1.6mm
4.Current rating/额定电流：3.0A
5.Voltage rating/额定电压：250V DC/AC
6.Insulation Resistance/绝缘电阻：1000MΩ Min
7.Dielectric Withstanding/ 耐电压：1000V AC/minute
8.Contact Resistance/ 接触电阻：30mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃



2P（外观）



3P～20P（外观随孔位递进自然变化）

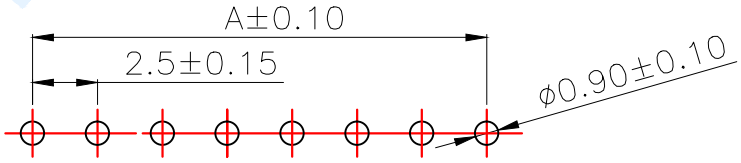

适用线路板(PCB LAYOUT)

NO.	Name	Number	Qty	Materil	Remarks
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	PA66	White

Zhongdi Electronic Technology Co., Ltd

								angle	±2°		design		date	name	WAFER CONNECTOR
								10~30	±0.30		Review		date		
								5~10	±0.20		Approved		date	model	WAFER-XH2.54-□□PWZ-W
								~ 5	±0.10	Drawing number:					
				modify	Review	Approved	Tolerance not specified			Proportion	1:1	unit	mm	gape number	A4

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-VH3.96-3PWT-W1-P WAFER-ZH1.5-4PLT-W1-P WAFER-PH2.0-2PWT-W1-P
WAFER-SH1.0-11PLT-W1-P WAFER-HY2.0-4PWT-W1-P WAFER-HY2.0-6PWT-W1-P
WAFER-MX1.25-5PLT-W1-P WAFER-SHB1.0-13PLT-W1-P WAFER-SUR0.8-4PLT-W1-P
WAFER-TJC8-2.54-2PWZ WAFER-XHB2.54-7PWT-W1-P WAFER-HY2.0-10PWT-W1-P
WAFER-SH1.0-6PWT-W1-P WAFER-SHB1.0-8PWT-W1-P WAFER-ZH1.5-12PWT-W1-P
WAFER-HY2.0-7PWT-W1-P WAFER-SH1.0-8PWT-W1-P WAFER-SUR0.8-14PWT-W1-P
WAFER-XH2.54-12PWT-W1-P WAFER-ZH1.5-2PWT-W1-P WAFER-MX1.25-2PWZ-C22-9T
WAFER-MX1.25-4PWZ-C22-9T WAFER-MX1.25-5PZZ-C22-9T WAFER-ZH1.5-2PLT-W1-P
WAFER-GH1.25-12PLT-W1-P WAFER-HY2.0-6PLT-W1-P WAFER-SUR0.8-12PWT-W1-P
WAFER-TJC8-2.54-12PZZ WAFER-VH3.96-5PWT-W1-P WAFER-GH1.25-14PWT-W1-P