

环保物料

TEL:0769-82001899

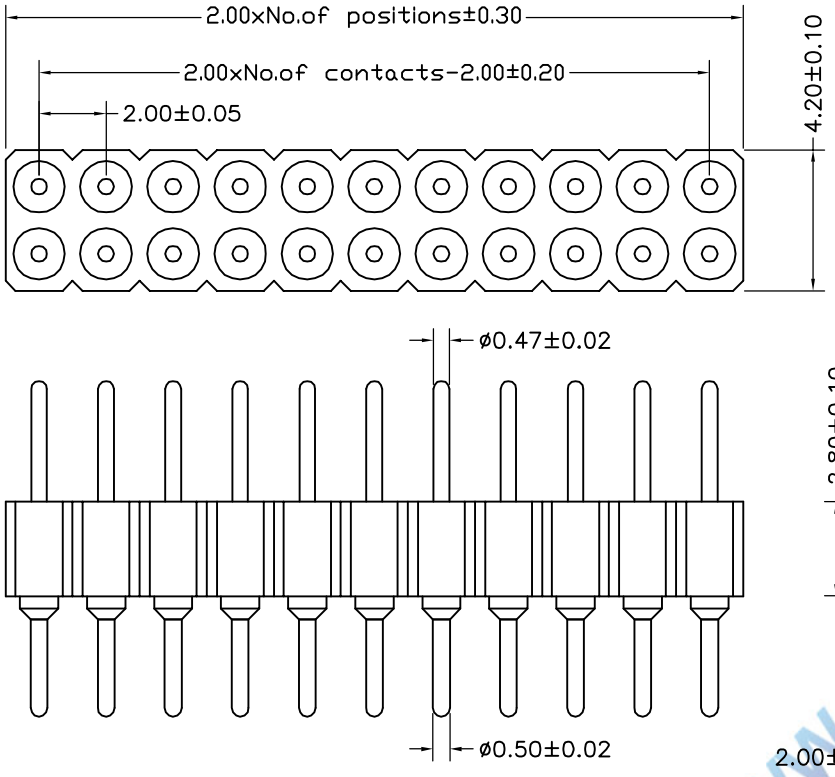

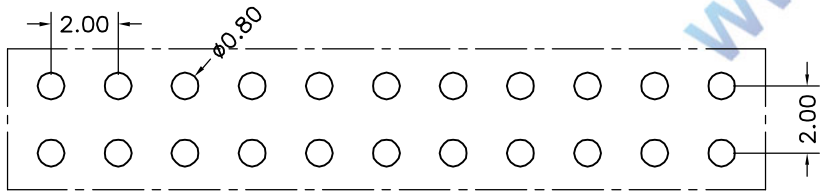

P.C.B LAYOUT

Technical Data

Materlal:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μm"NI,5μm/200μ"Sn

Gold Plated:2μm"/80μm"Ni,0.8μ" gold

Insuiator:PPS UL94V-0

Mating pin□:0.47/0.50mm

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insuiation resistance:≥1000MΩ at V=100V

Operaing voltage:60VAC/DC

Mechanical:

Mechanical lige:min 500 cycle

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

MH200V-12-xx-1000

- xx: Pin位数
- 12: 1=单排 2=双排
- 1: 1=单塑 2=双塑
- V: V=直插 R=弯插 VS=立式贴片 RS=卧式贴片

WWW.XFCONN.COM

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME	2.00mm Machined Pin Header
PART. NO.	MH200V-12-xx-1000

SHEET	1/1
DATE	2010.4.12
UNITS	mm
SCALE	1:1
DWG NO.	009

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XFCN:

M4202V-K-2x2-N2 M3025R-2x10P MF254V11-05-1000-H70 M2510V-05P M3025R-1x6P M1201RS-06-BK M2508R-08P M3961R-02P M4202V-2x7P M2501RF-08P PM200V-11-12-H43 TT56120177-1385 M2016VS-04P PZ254R-12-20P M1010VS-2X10P M1510V-09P M2501R-K-04P MF200V-12-20-0740 PM254V-12-08-H85 PM200VS-12-08-H43 M0611RS-10-GB M1010VS-2x08P M2016R-07P M2020V-2x6P M2029VS-06P M3960R-04P M3961V-05P M3025V-2x11P M3025V-2x7P M3965V-10P