
Rocker Switch | **RD1-1A-DC-1-UL**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

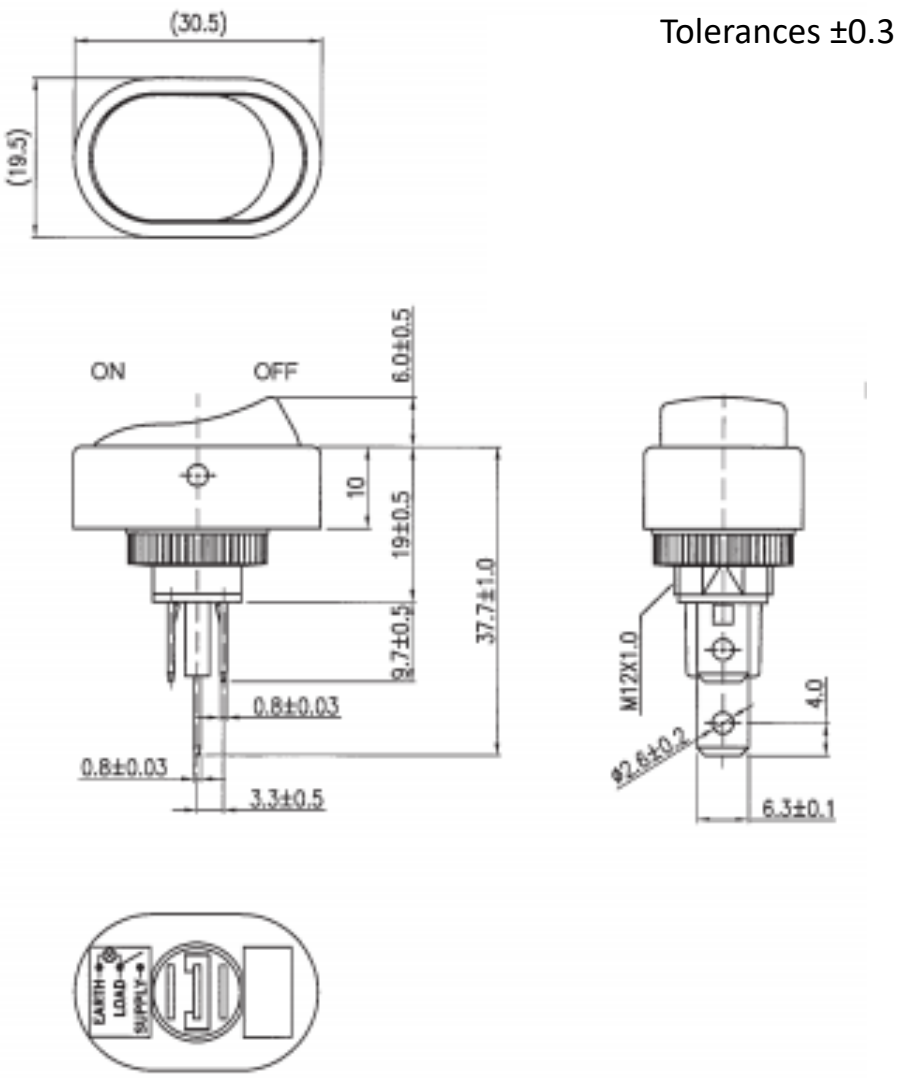

Mounting Hole

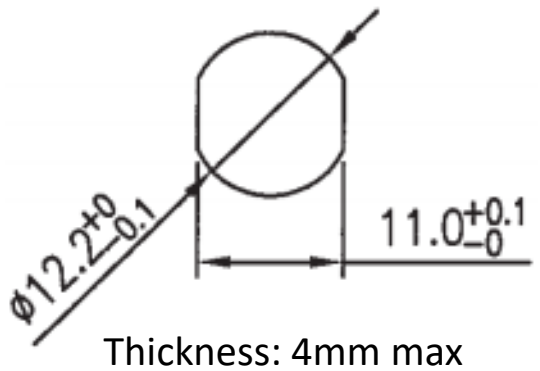

Thickness: 4mm max

Circuit Diagram

3P SPST OFF-ON (LED-D)



Electrical Specifications

Rating	30A 12V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66
Actuator	Blue clear, PC
LED	Blue (Dependent)

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

TB1-2H-DC-6 SRA1-1A-DC-1-NN-2 SB-1B-DC-3-R TA2-1G-DC-6-O RC-1A-DC-1-AL TA1-1A-DC-4
TE1-1F-DC-1-PB SC-B PB-1A-DC-2-RDL SRC1-1B-DC-1-B SRD2-1G-DC-1-BNN SRD2-2F-DC-1-RNN
PD-1E-DC-9-UL RD2-1A-DC-1-AL SB-1B-DC-3-B SRB1-1G-DC-1-NN SRD1-2A-DC-1-BGN TC6-P1-Z
PB-1B-DC-2-RIL RA4-2A-DC-2-AL RF1-1A-DC-2-B-3 SRA1-2F-DC-1-NN SRD2-2F-DC-1-BNN TA2-1A-DC-5
TE3-1A-DC-1-AL TE6-1A-DC-1-UL WR1 PB-1A-DC-2-B RF3-1A-DC-2-GL RG3-1A-DC-1-B