



标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

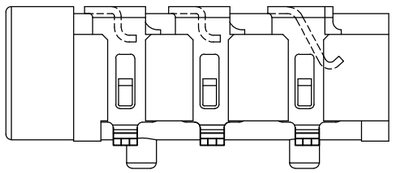


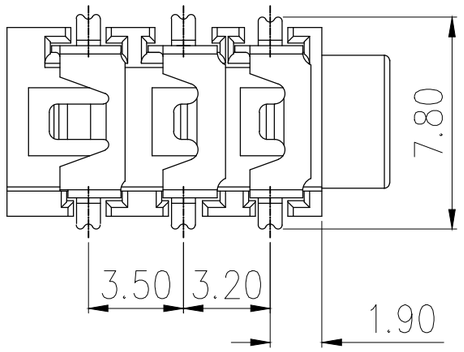


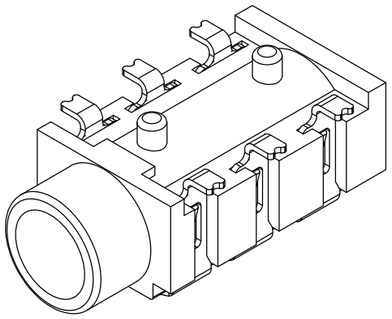

3D VIEW

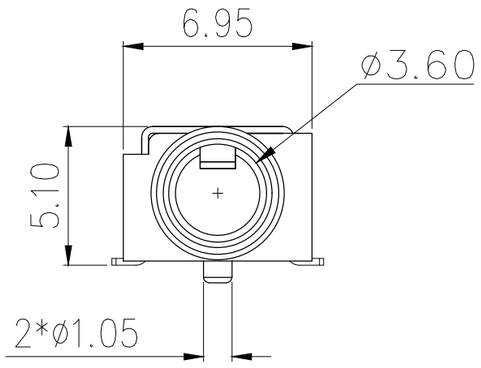




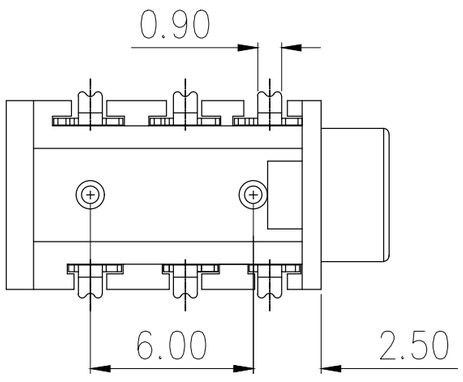


电气性能

NOTES:
1. MATERIAL:
   1.1. HOUSING: PA9T, COLOR IS BLACK;
   1.2. CONTACT: PHOSPHOR COPPER (C5191,T=0.25mm);

2. ELECTRICAL:
   2.1. VOLTAGE RATING: 30 VAC RMS;
   2.2. CURRENT RATING: 0.5 AMP;
   2.3. CONTACT RESISTANCE: 30MILLIOHMS MAX.;
   2.4. WITHSTAND VOLTAGE: 500 VAC RMS
   50(60)Hz,1MIN.;
   2.5. INSULATION RESISTANCE: 100MEGOHMS MIN
   @500V DC;
3. MECHANICAL:
   3.1. MATING FORCE: 5~25N;
   3.2. UNMATING FORCE: 5~25N;
   3.3. OPERATING LIFE: 5000 CYCLES;
4. PLATING:
   4.1. TERMINAL:
   NI PLATING OVER ALL,
   TIN PLATING ON SOLDER AREA,
5. ENVIRONMENTAL:
   5.1. STORAGE TEMPERATURE RANGE: -40℃~+85℃;
   5.2. OPERATION TEMPERATURE RANGE: -25℃~+70℃;
6. SALT SPRAY TEST: 8H(EXCLUDING RIVETED BENDS)

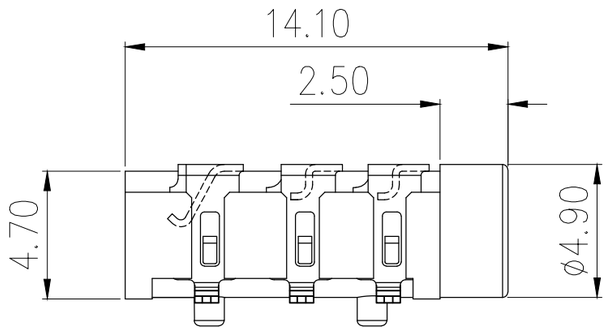

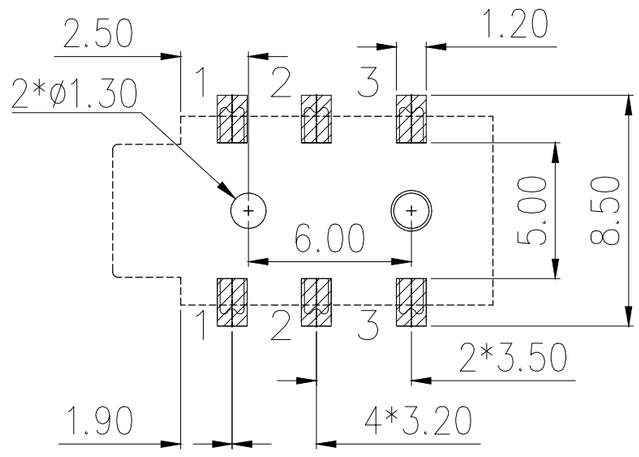

RECOMMEND PCB LAYOUT(±0.05)

序 号	品 名	材 质	电镀/颜色	备 注
2	接触	铜	镀镍	
1	基座	PA9T	黑色	

深圳市虹成电子有限公司		品 名 TITLE	耳机座		
		料 号 PART NO	HC-PJ-313D-B-SMT		
UNLESS OTHERWISE, GENERAL TOLERANCE: X.xxx ±0.10 X.xx ±0.20 X.x ±0.30 ANGULAR: X.xx° ±1° X.x° ±3° X.° ±5°	比 列 SCALE	1:1			
	单 位 UNIT	MM	制 图 DRAW	AhYe	
	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云	
	版 本 REV	A	批 准 APPROVE	赵亮亮	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HC:

HC-PHB2.0-2x4AW HC-PZ127-7.2L-2x3PS HC-PZ254-11.5L-1x10PZ HC-PZ254-13.8L-1x6PWA
HCZZ0001-2 HCZZ0001-4 HC-FPC-0.5-24P-FH20 HC-PM200-4.3H-2x20PZ HCZZ0576-5 HCZZ0451-6
HCZZ0530-4 HC-FPC-0.5-50P-FHH20 HC-PM254-5.0H-2x10PZ HCZZ0001-6 HCZZ0451-4 HCZZ0514-6
HC-FPC-0.5-6P-CSH20 HC-PHB2.0-2x5A HC-USB3.0-L175-2X1-J HC-USB3.0-L257-J
HC-FPC-0.5-10P-FH20 HC-PZ254-11.5L-2x18PZ HCZZ0032-6 HC-FPC-0.5-40P-FH20 HC-USB3.0-C26
HC-PM200-4.3H-2x8PS HC-PM254-8.5H-1x21PZ HC-PM254-8.5H-2x20PS HC-USB3.0-C34-P HCZZ0451-3