
ROHS Compliant


MAPX	MODIFICATION	DATE	DRAW	APPROVE

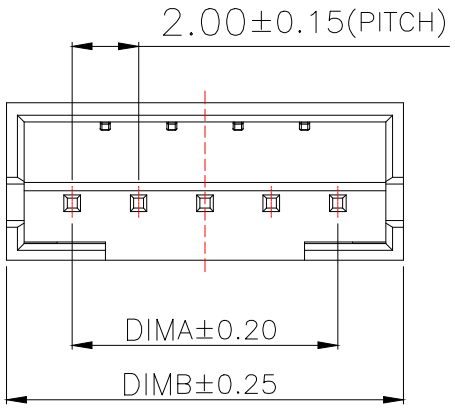


Technical Index:


1.Temperature range: −25°C~85°C.
2.Rated voltage: 200V DC/AC(rms).
3.Rated current: 2.0A.
4.Contact resistance: ≤25mΩ.
5.Withstanding voltage: 500V AC/minute.
6.Insulation resistance:≥1000MΩ.

Part No	Pin	A	B
WAFER−PH2.0−2PZZ−H62	2	2.00	6.00
WAFER−PH2.0−3PZZ−H62	3	4.00	8.00
WAFER−PH2.0−4PZZ−H62	4	6.00	10.00
WAFER−PH2.0−5PZZ−H62	5	8.00	12.00
WAFER−PH2.0−6PZZ−H62	6	10.00	14.00
WAFER−PH2.0−7PZZ−H62	7	12.00	16.00
WAFER−PH2.0−8PZZ−H62	8	14.00	18.00
WAFER−PH2.0−9PZZ−H62	9	16.00	20.00
WAFER−PH2.0−10PZZ−H62	10	18.00	22.00
WAFER−PH2.0−11PZZ−H62	11	20.00	24.00
WAFER−PH2.0−12PZZ−H62	12	22.00	26.00
WAFER−PH2.0−13PZZ−H62	13	24.00	28.00
WAFER−PH2.0−14PZZ−H62	14	26.00	30.00
WAFER−PH2.0−15PZZ−H62	15	28.00	32.00
WAFER−PH2.0−16PZZ−H62	16	30.00	34.00
WAFER−PH2.0−17PZZ−H62	17	32.00	36.00
WAFER−PH2.0−18PZZ−H62	18	34.00	38.00
WAFER−PH2.0−19PZZ−H62	19	36.00	40.00
WAFER−PH2.0−20PZZ−H62	20	38.00	42.00

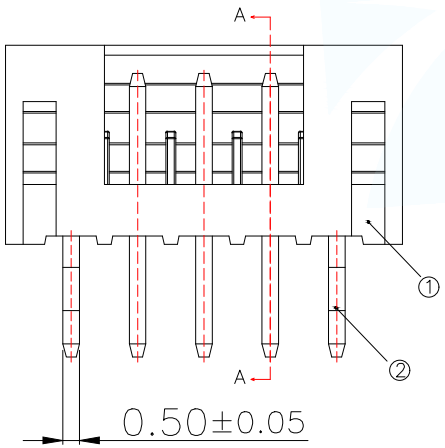

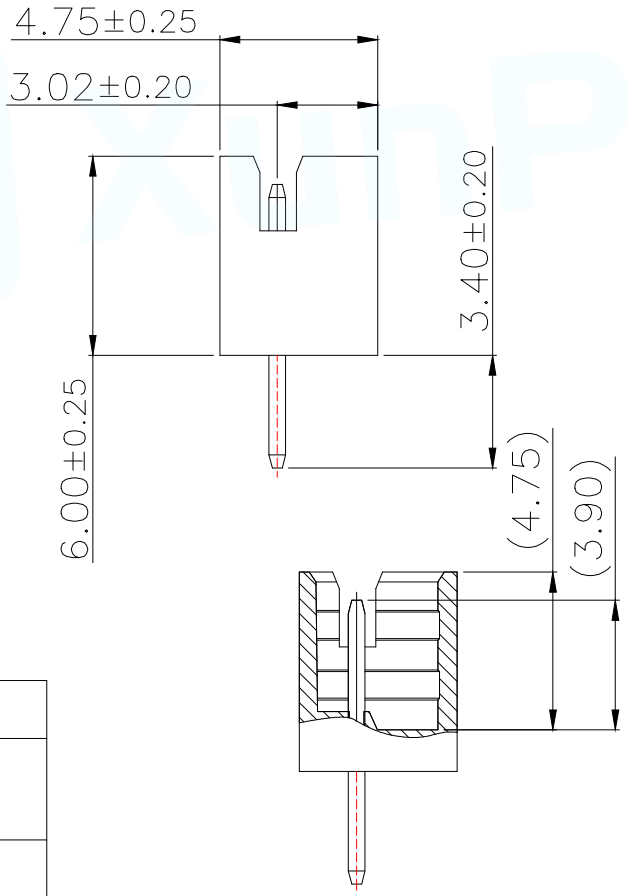

SECTION A−A

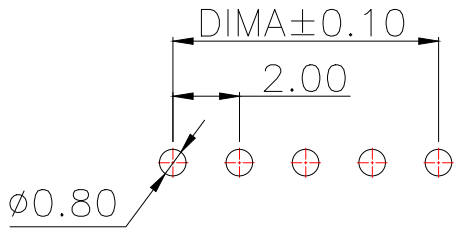

适用线路板(PCB LAYOUT)

序号	品名	材质
1	PH2.0 直针 胶芯	PA66 UL94V−2 Yellow
2	PH2.0 直针 端子	Copper Alloy/ Tin Plating

MANUFACTURE DWG	东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd		
UNLESS OTHERWISE SPECIFED TOLERANCES		TITLE: PH2.0 直针	
		PAR	WAFER−PH2.0−NPZZ−H62
		DWN	
		CHKD	
		APVD	
DECIMALS: / ANGLES:		SCALE1:1	UNIT:MM
X.:±0.50 / X°.:±5°			
.X:±0.20 / X.X°:±3°			
.XX:±0.10 / X.XX°:±1°	CUSTOMER COPY	SIZE:A4	SHEET:1F1 REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

DC-031A-A100 HDMI-212L MU-103-ARW64 WAFER-MX1.25B-8PWB FPC-0.5AX-30PWCR-H20 FPC-0.5FX-14PWCR-H20 FPC-0.5FX-20PWBH15 FPC-0.5HF-10PWBR-H20 FPC-1.0AX-4PWCR-H25 WAFER-PH2.0-11PZZ WAFER-PH2.0-6PWB WAFER-WBM4.2-16PJK-GB PHB2.0-02-20PZZ WAFER-GH1.25-6PLB FPC-0.5FX-4PWCR-H20 FPC-1.0AX-14PWCR-H25 WAFER-PH2.0-3PWB FPC-0.5AX-24PWCR-H20 FPC-0.5FX-4PWBH15 SMA-KWE-323C-H13X23-LW WAFER-PH2.0-2PJK WAFER-VH3.96-4PLB FPC-0.5AL-6PB FPC-0.5AS-5PWCR-H20 FPC-0.5FX-16PWCR-H20 WAFER-PH2.0-8PLB WAFER-XH2.54-4PWZ-H62 FPC-1.0HF-4PWAR-H20 RJ45-005-014-11 TYPEC-304YDSW-ACP16