
THERMALTRONICS

Check for latest datasheet

M7LR403 Datasheet

Technical Specifications

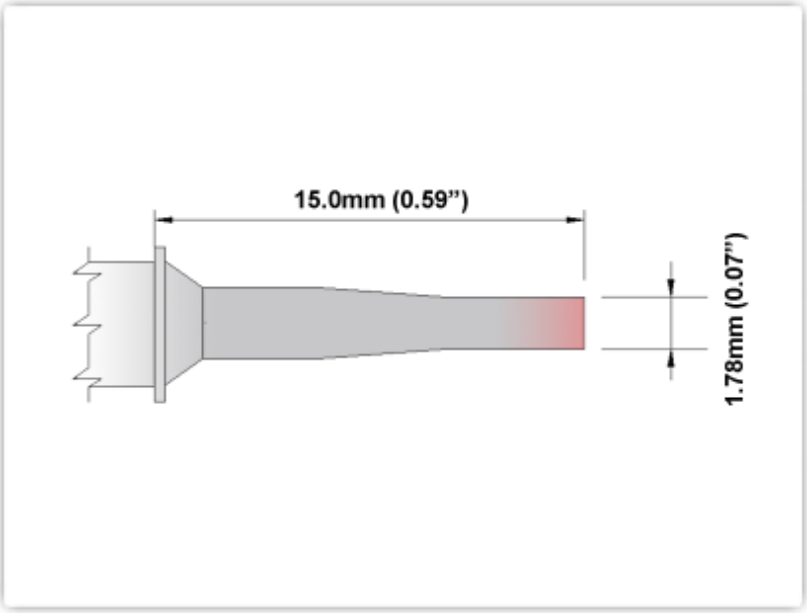

M7LR403

Chisel 60° Long Reach 1.78mm (0.07")


Tip Style: Chisel 60°
Tip Width: 1.78mm (0.07")
Tip Length: 15.00mm (0.59")

700 Type Cartridge[1]:	350°C - 398°C
RoHS Compliant[2] / Lead Free:	YES
Equivalent to:	STTC-142
For Use With:	TMT-9000S-1, TMT-9000S-2, MX-500, MX-5000, MX-5200

Material Composition

Patented Color Band



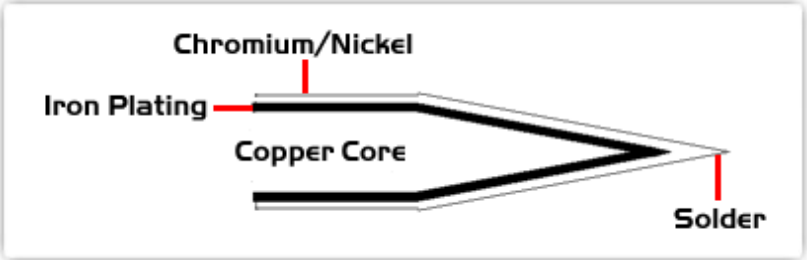

All components are RoHS compliant and Lead-Free.

1 Thermaltronics tip cartridges will typically idle within a temperature range of +/-1.1°C. However, there is variation in idle temperature across tip geometries within an individual temperature series. Thermaltronics offers a wide variety of tip geometries from 0.25mm fine point tip to 5mm chisel. The length and geometry of a tip will have an influence on the tip idle temperature. To accurately measure idle temperature it will depend greatly on the measurement method, technique and equipment used. Two different methods or the use of alternative equipment will produce different test results.

2 Please refer to http://www.rohs.gov.uk for details on RoHS Compliance.

Copyright © 2010-2015 Thermaltronics All Rights Reserved

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

THERMALTRONICS:

M7CS151H M7CS155 M8CP200 M75DT004 M7CP303 M8CS152 SHP-K K80CH050 M7CS152H PM75C300 S75BV004 S75CH010 K60DT006 K75CH025 M7CH178 M8LR400 M7SB275 M8CH178 PM75SB276 S75MF003 TMT-2000S-SM S75CS010 M7B325 M7CP200 M8B325 M8CB226 S75C001 K75DT006 PM75CH176 SHP-1