

DATE	DESCRIPTION	REV.
5.23.16	CHANGE AS PER ECN 16-060 UPDATE HOUSING	A


FRONT SHELL




INSERTED BODY





REAR SHELL




ASSEMBLED PLUG



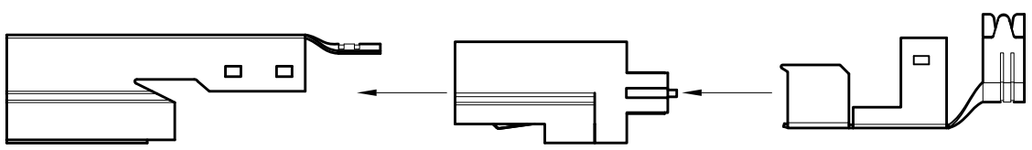

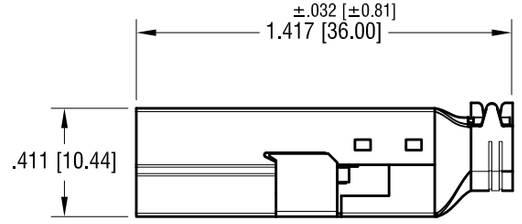

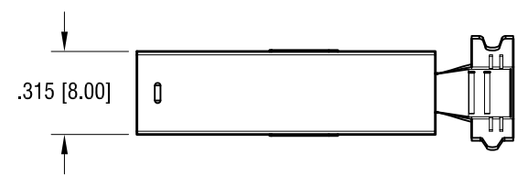

PLUG SPECIFICATIONS:

SHELL: MAT'L- STEEL
FINISH- NICKEL PLATE

INSULATION: MAT'L- THERMOPLASTIC, UL 94V-0

CONTACT: MAT'L- PHOSPHOR BRONZE
FINISH- GOLD FLASH OVER NICKEL

ELECTRICAL CHARACTERISTICS:

RATED VOLTAGE: 30V (RMS)

CONTACT CURRENT RATING: 1 Amp DC MAX.
CONTACT RESISTANCE: 15m Ω min.

DIELECTRIC WITHSTANDING VOLTAGE: 750V AC FOR 1 MINUTE

MECHANICAL CHARACTERISTICS:

OPERATING TEMPERATURE: -13°F (-25°C) TO 176°F (+80°C)

DURABILITY: 1500 CYCLES MIN.

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME: USB 3.0 TYPE B PLUG KIT		
MATERIAL: AS NOTED		
FINISH: AS NOTED	DRN BY: NT	DATE: 4.07.10
	APP'D: LN	SCALE: 2x
TOLERANCES: INCH [MM] DECIMAL ± .010 [± 0.25] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED	CODE: C	DWG NO.: 952

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Keystone Electronics:

1028C 1833 4673 4816 4934 7311 7623 1220 2462 3065 1798C 1803 4871 1595-2 3001 4876 5266 892 2220 603-8 8406 9900 1837 NC16354SZ 2501 3059 3567 4628 81-8 7233