Alchip™-MZJ Series Upgrade!

- Lower ESR, 2,000 to 5,000 hours at 105℃
- Rated voltage range : 6.3 to 50V
- Nominal capacitance range : 22 to 10,000μF
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- Vibration resistant structure
- RoHS2 Compliant
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.

MZJ
↑ Lower ESR
MZA




◆SPECIFICATIONS

Items	Characteristics							
Category Temperature Range	-55 to +105℃							
Rated Voltage Range	6.3 to 50Vdc							
Capacitance Tolerance	±20% (M)							(at 20℃, 120Hz)
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)							(at 20℃ after 2 minutes)
Dissipation Factor (tan δ)	Rated voltage (Vdc)	6.3V	10V	16V	25V	35V	50V	
	tan δ (Max.)	0.26	0.19	0.16	0.14	0.12	0.12	(at 20℃, 120Hz)
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase.							
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (Vdc)	6.3V	10V	16V	25V	35V	50V	
	Z(-25℃)/Z(+20℃)	2	2	2	2	2	2	
	Z(-40℃)/Z(+20℃)	3	3	3	3	3	3	
	Z(-55℃)/Z(+20℃)	4	4	4	3	3	3	(at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage is applied for specified time at 105℃.							
	Time	E61 to JA0 : 2,000 hours						
		KE0 to LN0 : 5,000 hours						
	Capacitance change	≦±30% of the initial value						
	D.F. (tan δ)	≦200% of the initial specified value						
	Leakage current	≦The initial specified value						
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.							
	Capacitance change	≦±30% of the initial value						
	D.F. (tan δ)	≦200% of the initial specified value						
	Leakage current	≦The initial specified value						
Surge Voltage Test	The capacitors shall be subjected to 1,000 cycles each consisting of charging with the specified surge voltage for 30±5 seconds through a protective resistor (as required for RC=0.1±0.05sec) and open-circuiting for 5.5 minutes at a room temperature of 15 to 35℃.							
	Rated voltage (Vdc)	6.3	10	16	25	35	50	
	Surge voltage (Vdc)	7.2	12	18	29	40	58	
	Appearance	No significant damage						
	Capacitance change	≦±20% of the initial value						
	D.F. (tan δ)	≦200% of the initial specified value						
	Leakage current	≦The initial specified value						
	(Caution) Surge Voltage Test intends to evaluate capacitors in durability of an exceptional excessive voltage under specific conditions.It does not imply long-term use at all.							

◆DIMENSIONS [mm]

● Terminal Code : A


● Size code : E61 to LN0

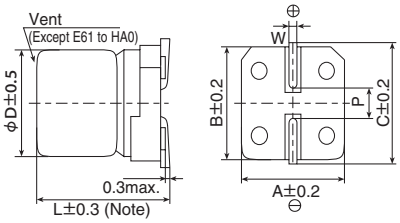

Note : L±0.5 for HA0 to LN0

● Terminal Code : G(Vibration resistant structure)

● Size code : F61 to LN0

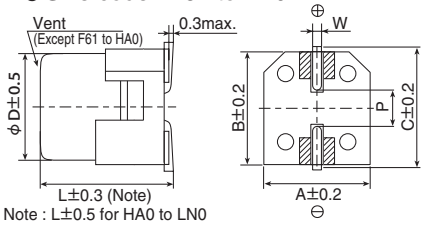

Note : L±0.5 for HA0 to LN0

▨ : Dummy terminals

Size code	φD	L	A	B	C	W	P
E61	5	5.8	5.3	5.3	5.9	0.5 to 0.8	1.4
F61	6.3	5.8	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5

◆MARKING

EX) 35V220μF




● Rated voltage symbol (E61 to JA0)

Rated voltage (Vdc)	6.3	10	16	25	35
Symbol	j	A	C	E	V

KE0 to LN0

EX) 16V1,800μF




Applying voltage over the rated voltages causes the capacitors to have short lifetime.
Besides, applying voltage over the specified surge voltages may cause to have short circuit failure. A protection circuit should be used if applied voltage will exceed the rated voltages.

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

Alchip™-MZJ Upgrade! Series

◆PART NUMBERING SYSTEM

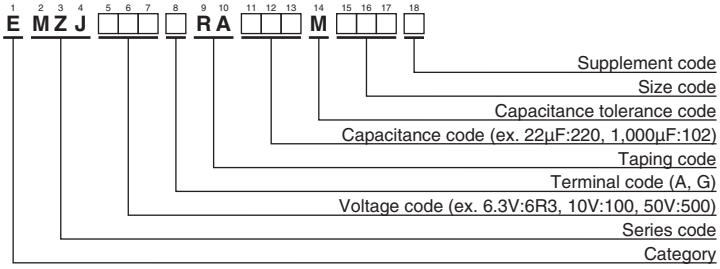

Please refer to "Product code guide (surface mount type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Size code	ESR (Ω max./20℃, 100kHz)	Rated ripple current (mArms/105℃, 100kHz)	Part No.
6.3	100	E61	0.36	240	EMZJ6R3ARA101ME61G
	220	F61	0.26	300	EMZJ6R3□RA221MF61G
	330	F80	0.16	600	EMZJ6R3□RA331MF80G
	1,000	HA0	0.08	850	EMZJ6R3□RA102MHA0G
	1,500	JA0	0.06	1,190	EMZJ6R3□RA152MJA0G
	1,800	JA0	0.06	1,190	EMZJ6R3□RA182MJA0G
	3,300	KE0	0.051	1,210	EMZJ6R3□RA332MKE0S
	3,900	KG5	0.044	1,420	EMZJ6R3□RA392MKG5S
	6,800	LH0	0.035	1,850	EMZJ6R3□RA682MLH0S
	10,000	LN0	0.026	2,330	EMZJ6R3□RA103MLN0S
10	150	F61	0.26	300	EMZJ100□RA151MF61G
	680	HA0	0.08	850	EMZJ100□RA681MHA0G
	1,000	JA0	0.06	1,190	EMZJ100□RA102MJA0G
	1,200	JA0	0.06	1,190	EMZJ100□RA122MJA0G
	2,200	KE0	0.051	1,210	EMZJ100□RA222MKE0S
	2,700	KG5	0.044	1,420	EMZJ100□RA272MKG5S
	4,700	LH0	0.035	1,850	EMZJ100□RA472MLH0S
	6,800	LN0	0.026	2,330	EMZJ100□RA682MLN0S
16	47	E61	0.36	240	EMZJ160ARA470ME61G
	100	F61	0.26	300	EMZJ160□RA101MF61G
	150	F80	0.16	600	EMZJ160□RA151MF80G
	220	F80	0.16	600	EMZJ160□RA221MF80G
	470	HA0	0.08	850	EMZJ160□RA471MHA0G
	680	JA0	0.06	1,190	EMZJ160□RA681MJA0G
	820	JA0	0.06	1,190	EMZJ160□RA821MJA0G
	1,800	KE0	0.051	1,210	EMZJ160□RA182MKE0S
	2,200	KG5	0.044	1,420	EMZJ160□RA222MKG5S
	3,900	LH0	0.035	1,850	EMZJ160□RA392MLH0S
	5,600	LN0	0.026	2,330	EMZJ160□RA562MLN0S
25	22	E61	0.36	240	EMZJ250ARA220ME61G
25	33	E61	0.36	240	EMZJ250ARA330ME61G
	33	F61	0.26	300	EMZJ250□RA330MF61G
	47	F61	0.26	300	EMZJ250□RA470MF61G
	68	F61	0.26	300	EMZJ250□RA680MF61G
	100	F80	0.16	600	EMZJ250□RA101MF80G
	330	HA0	0.08	850	EMZJ250□RA331MHA0G
	470	JA0	0.06	1,190	EMZJ250□RA471MJA0G
	560	JA0	0.06	1,190	EMZJ250□RA561MJA0G
	1,200	KE0	0.051	1,210	EMZJ250□RA122MKE0S
	1,500	KG5	0.044	1,420	EMZJ250□RA152MKG5S
	2,200	LH0	0.035	1,850	EMZJ250□RA222MLH0S
	3,900	LN0	0.026	2,330	EMZJ250□RA392MLN0S
35	22	E61	0.36	240	EMZJ350ARA220ME61G
	33	F61	0.26	300	EMZJ350□RA330MF61G
	47	F61	0.26	300	EMZJ350□RA470MF61G
	68	F61	0.26	300	EMZJ350□RA680MF61G
	100	F80	0.16	600	EMZJ350□RA101MF80G
	100	HA0	0.08	850	EMZJ350□RA101MHA0G
	150	HA0	0.08	850	EMZJ350□RA151MHA0G
	220	HA0	0.08	850	EMZJ350□RA221MHA0G
	330	JA0	0.06	1,190	EMZJ350□RA331MJA0G
	390	JA0	0.06	1,190	EMZJ350□RA391MJA0G
	680	KE0	0.051	1,210	EMZJ350□RA681MKE0S
	820	KG5	0.044	1,420	EMZJ350□RA821MKG5S
	1,500	LH0	0.035	1,850	EMZJ350□RA152MLH0S
	2,700	LN0	0.026	2,330	EMZJ350□RA272MLN0S
50	390	KE0	0.105	930	EMZJ500□RA391MKE0S
	470	KG5	0.092	1,120	EMZJ500□RA471MKG5S
	1,000	LH0	0.073	1,660	EMZJ500□RA102MLH0S
	1,200	LN0	0.050	1,920	EMZJ500□RA122MLN0S

□ : Enter the appropriate terminal code.

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Size code	Capacitance(μF) \ Frequency(Hz)	120	1k	10k	100k
E61 to JA0	22 to 150	0.40	0.75	0.90	1.00
	220 to 560	0.50	0.85	0.94	1.00
	680 to 1,800	0.60	0.87	0.95	1.00
KE0 to LN0	390 to 470	0.50	0.85	0.94	1.00
	680 to 1,800	0.60	0.87	0.95	1.00
	2,200 to 3,300	0.75	0.90	0.95	1.00
	3,900 to 10,000	0.85	0.95	0.98	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5℃ rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Nippon Chemi-Con:

EMZA630ARA301MKG5S EKXJ401ELL680ML25S EKYA100ELL331MF11D EKMG160ELL682MLN3S EKY-101ELL101MK16S EKMR401VSN681MR50S ELXZ630ELL152MM35S EGPD250ELL302MK25H EGXF630ELL391MK20S EKMQ201VSN152MR40S ESMQ401VSN181MP35S HHXC500ARA470MHA0G APXA6R3ARA471MJ80G EKMQ401VSN151MQ25S EKMS161VSN332MA50S EKXG351ELL151MMP1S EKY-101ETD221MK25S EKY-500ELL471MJ30S EKYA500ELL222MLP1S EMVE101ARA470MKE0S EGPA350ELL122ML20S EKMG101ELL470MJC5S EKXJ401ELL121MMN3S EKZN350ELL471MJ20S EGXF500ELL751MK25S EKMG251ELL101MLN3S EKY-250ELL331MJC5S EKYB250ELL102MJ20S EMVY160ARA100MD55G EKZE101ELL101MK16S