

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.10	阿树

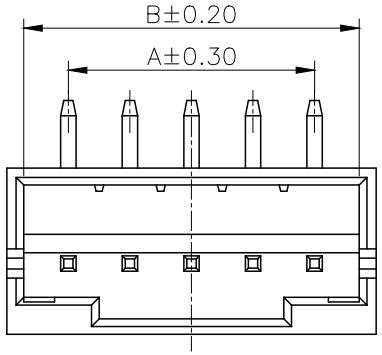

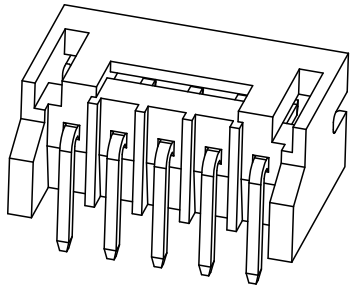



■SPECIFICATIONS
- •Voltage rating:250V AC/DC
- •Current rating:2A AC/DC
- •Withstanding Voltage:1000V AC/minute
- •Temperature range:−40°C~+125°C
- •Insulation resistance:≥1000MΩ
- •Contact resistance:≤20mΩ


PART NO.:


X2016 W R−04 B R−LP SN
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

①Series No
②Category:W−Wafer
③Welding Board Angle:R−Stright 90°
④Row No.Pin No:XX−02~16Pin
⑤Special No:B−With Baffle
⑥Special No:R−DIP 2.2mm
⑦Material: LP−LCP 94V−0,Natural
⑧Planting:SN−Tin Plating

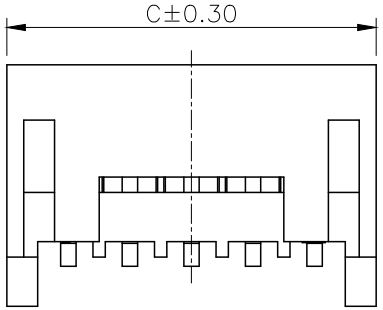

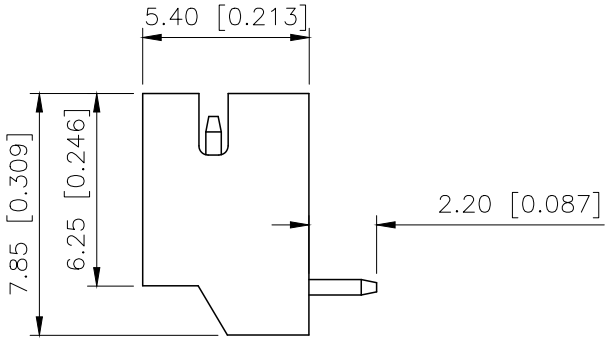

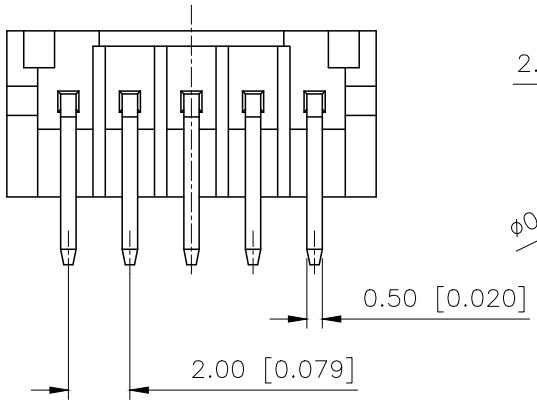

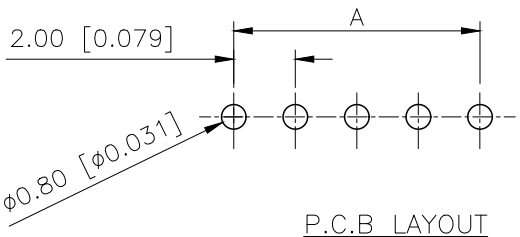

P.C.B LAYOUT

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	4.90	6.00	10	18.00	20.90	22.00
03	4.00	6.90	8.00	11	20.00	22.90	24.00
04	6.00	8.90	10.00	12	22.00	24.90	26.00
05	8.00	10.90	12.00	13	24.00	26.90	28.00
06	10.00	12.90	14.00	14	26.00	28.90	30.00
07	12.00	14.90	16.00	15	28.00	30.90	32.00
08	14.00	16.90	18.00	16	30.00	32.90	34.00
09	16.00	18.90	20.00				

X2016WR−04BR−LPSN	LCP	Brass	X2016H
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB 星树 Connection

DESIGN	阿树	VIEW:	MODEL TYPE: 2.00mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X2016WR−04BR−LPSN
APPROVED		SIZE: A4	DWG NO.: X−X2016WR−04BR−LPSN

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1