



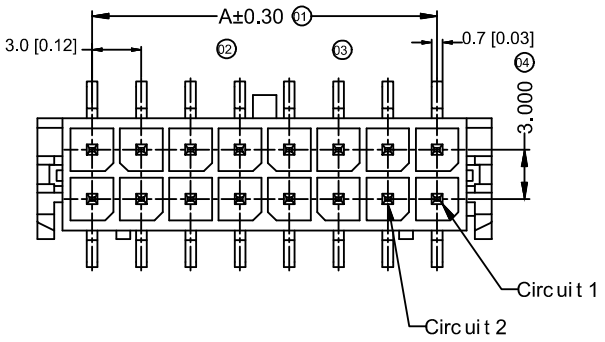


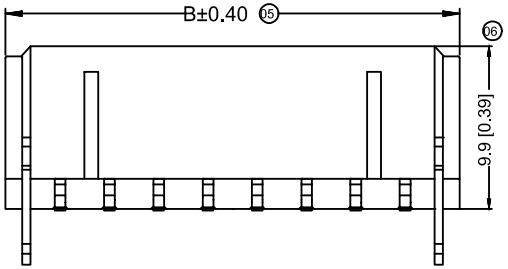

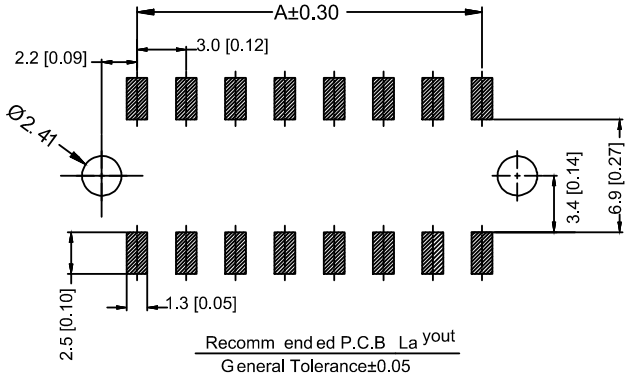

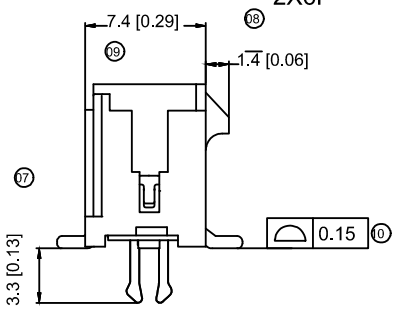

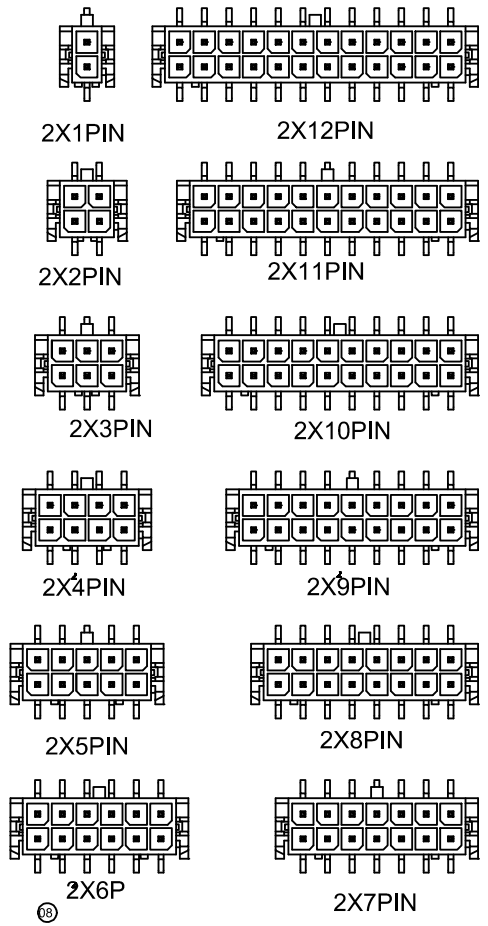

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10m Ω
- After environmental testing : ≤20mΩ

X3025WVS-2x03C-LPSW
01 02 03 04 05 06 07 08 09

01 Series No.
02 Category : W-wafer
03 Welding Board Angle: V- Stright 180°
04 Welding Way: S-SMT
05 Row No.-Pin No.: 2*XX-2*01P~2*12P
06 Plug the Pin & Special No.: C-The Harpoon
07 Material : LP-LCP 94V-0
08 Planting Category:
SN-Bright tin plating ; SW-Matte Tin plating
09 Color : Blank-Natural color

Poles	Dimensions(mm) A	Dimensions(mm) B	Poles	Dimensions(mm) A	Dimensions(mm) B
2*01	—	6.65	2*07	18.00	24.65
2*02	3.00	9.65	2*08	21.00	27.65
2*03	6.00	12.65	2*09	24.00	30.65
2*04	9.00	15.65	2*10	27.00	33.65
2*05	12.00	18.65	2*11	30.00	36.65
2*06	15.00	21.65	2*12	33.00	39.65

PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With XKB Housing
X3025WVS-2x03C-LPSW		Brass	Matte tin	Brass	Matte tin	X3025H
X3025WVS-2x03C-LPSN			Tin-Plated		Tin-Plated	

MARK	DESCRIPTION	DATE	REVISED	APPROVED
				XKB
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤4	±0.2
4<L≤16	±0.3
16<L≤63	±0.4
L>63	±0.5

www.helloxkb.com

DSND		DATE		SCALE: N/A	MODEL TYPE: 3.00 mm Crimp Style Connectors
DWN		DATE		VIEW:	PART NO.: X3025WVS-2x03C-LPSW
CHKD		DATE		UNIT: mm/in	DWG NO.: X3025WVS-2x03C-LPSW
APPD		DATE		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0