



REV.	DATE	DESCRIPTION
NC	09/22/03	INITIAL RELEASE
A	03/18/08	REVISE BODY PLATING TO GOLD

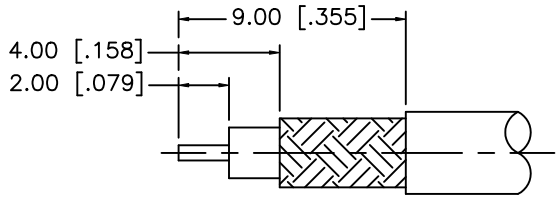

RECOMMENDED CABLE
STRIPPING DIM'S

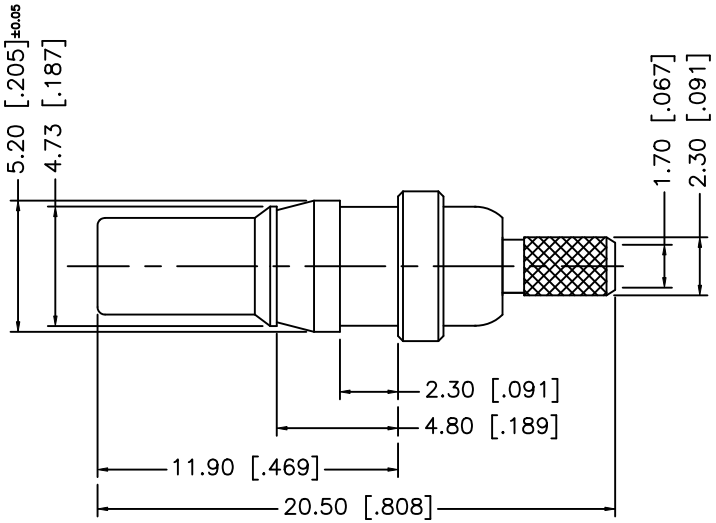

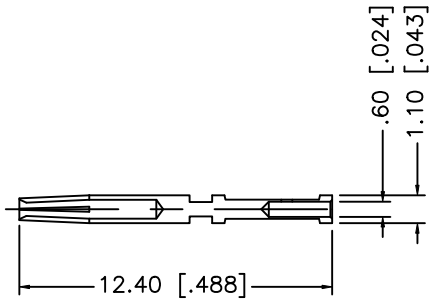

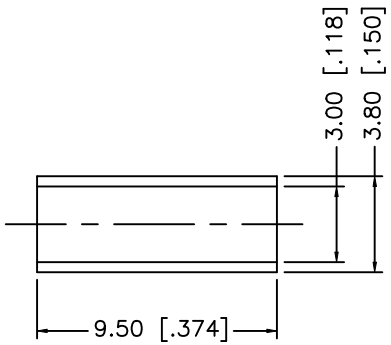

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

8					
7					
6	FERRULE	COPPER	NICKEL	1	
5	CONTACT PIN	BER. COPPER	GOLD	1	
4	BARREL	BRASS	NICKEL	1	
3	INSULATOR	TEFLON	NATURAL	1	
2	RETAINER RING	BER. COPPER	NICKEL	1	
1	BODY	BRASS	GOLD	1	
	DESCRIPTION	MATERIAL	FINISH	QTY	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	03/18/08
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/282/282104-75.DWG

Amphenol Connex

PART DESCRIPTION
1.0/2.3 CRIMP JACK
(FOR RG-179/U, 187A/U)

PART NO. 282104-75

DWG. NO.	REV.	SIZE	SCALE
282104-75.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

54202-G0805CLF 70234-112LF 76384-316LF CD15S13E4RV09LF DCMF37P LD15P33E4GV00LF LD25S33E4GV00LF RJE061661210 RJSBE5080C2 70218-1116LF 86093967896755LF 91614-403ALF DEM09P032N 54202-S08-07LF 86130202123355E1LF 65781-158 68001-108HLF 70430-164LF 86093968191755E3LF 86093968813H45V1LF 68000-236HLF 68001-200HLF 68002116HLF 69192-408HLF 95157-140LF D15P13A6RV12LF 67996-204HLF 86093488314745V1LF 863013A DAPO15S365TLF