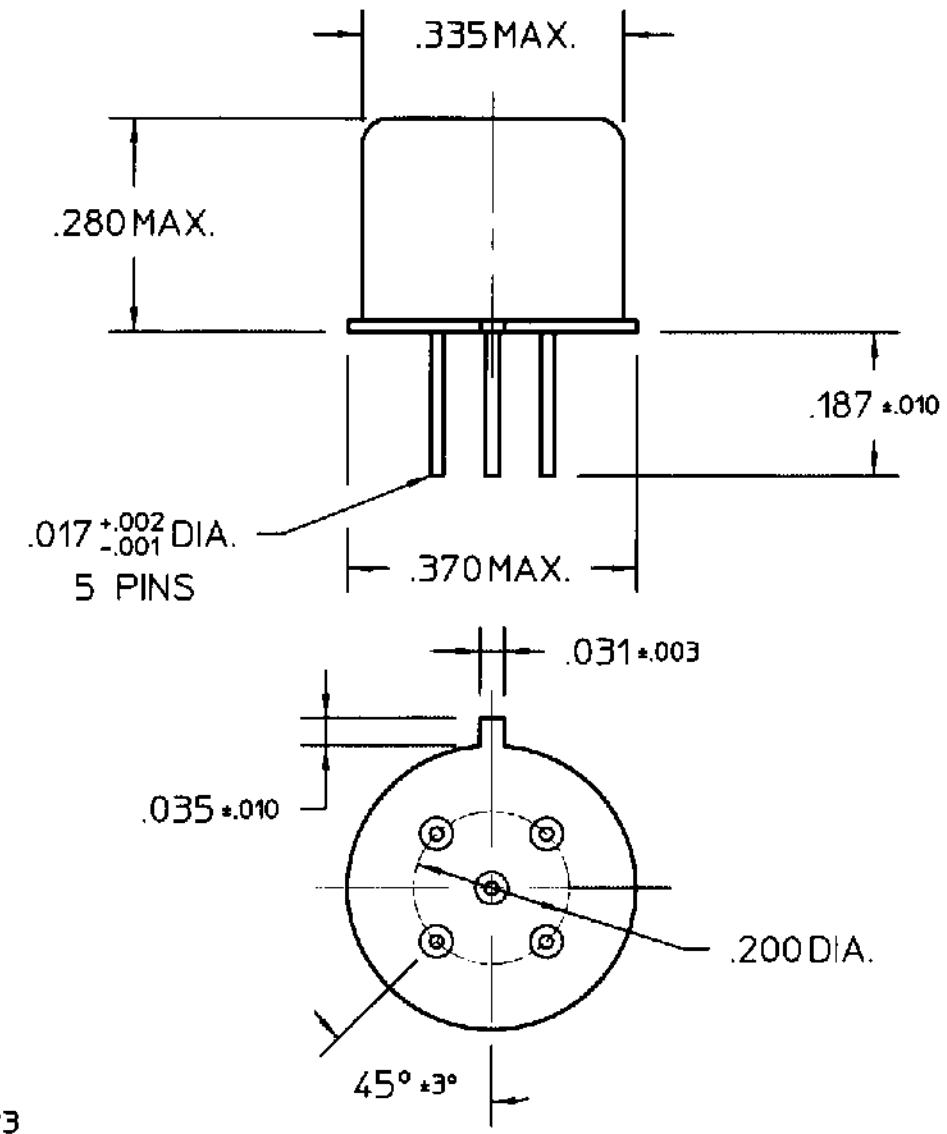


REV. 0

DCO 141423

COIL: @ 25°C

RESISTANCE 2000 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.2 VDC

MUST RELEASE 8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.

RELEASE TIME 2.0 MS MAX.

CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 10/6/99 CK ERDY 10/6/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL

CUST. NO. M39016/7-024L REV.

"J1MA" RELAY

J1MAP-26XL

F-718 REV. 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

J1MAP-26XL