
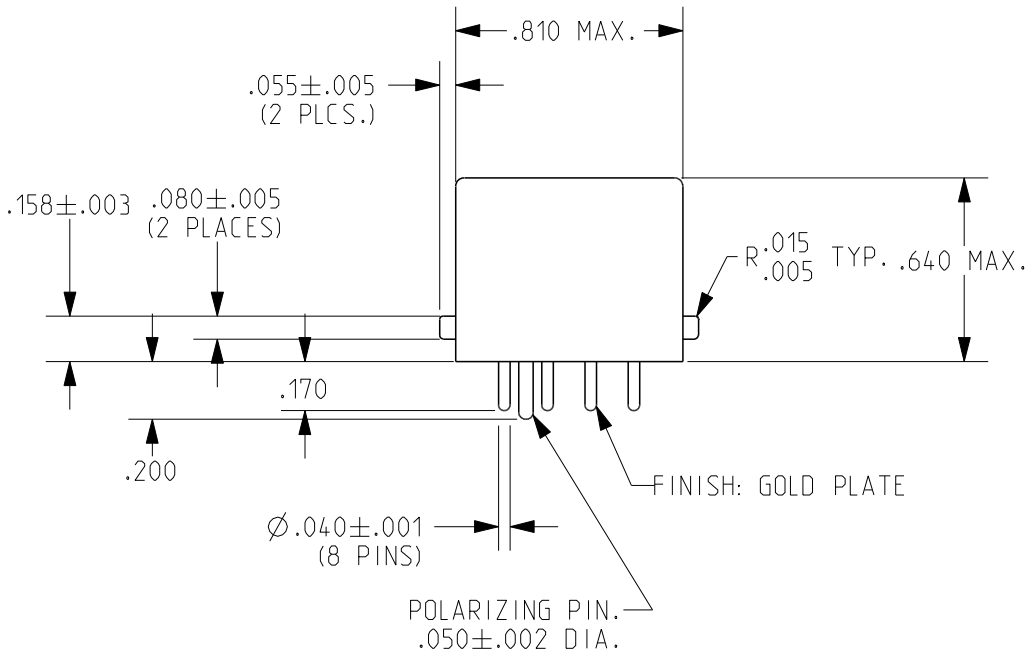


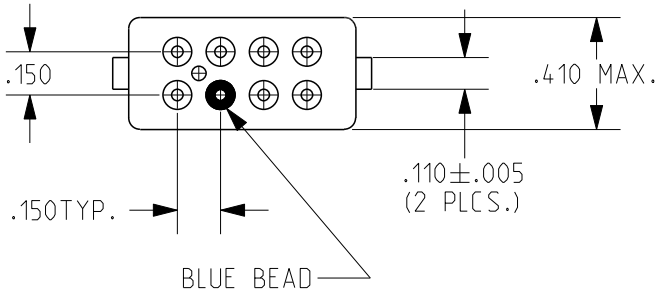

REV. D

DCO 301385

TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C


RESISTANCE	500 OHMS ±10%
NOMINAL VOLTAGE	28 VDC
MUST OPERATE	13.5 VDC MAX.
	TRANSIENT SUPPRESSION - 42 VDC MAX.
MUST RELEASE	5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:

VIBRATION	10 55		55 500		.06" DA 10	g's
	500	Hz TO	3000	Hz @	20	g's
SHOCK	50	g's	11	MS. DURATION		
TEMPERATURE	-70	°C TO	+125	°C		

NOTES:
1. OPERATE, RELEASE 5 MS MAX.
2. CONTACT STABILIZATION 2.5 MS MAX.
3. CONTACT BOUNCE 1 MS MAX.
4. CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

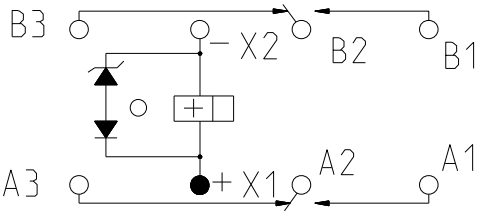

TERMINAL VIEW

CONTACT RATING: LOW LEVEL
TO 5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE,
100,000 OPERATIONS

DR. R.F. 25APR2011	CK. M.B. 26APR2011

CUST. QPL CUST. NO. M83536/2-028M REV.	TE NUMBER 5-1617758-4	CII PART NUMBER FCB-205-0228M

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

RH73H2A40MKTN SBCHE154R7K 1743455-2 2-292161-3 3430B2F51RTDF 3631B101LL 650075-000 TE50BR39J 2005330-1 2377783-2 MPT100C18RF SMW73R0JT 1903112-2 CRGCQ2010J3K3 ROX05SJ18R SBCHE64R7K 1-794222-0 2834055-1 3-1393225-0 917696-1 936348-1 CPF0402B37K4E1 1-962915-1 141991-2 1969656-1 2310537-1 2380312-2 U5254-000005-030PA 1393431-1 175977-2