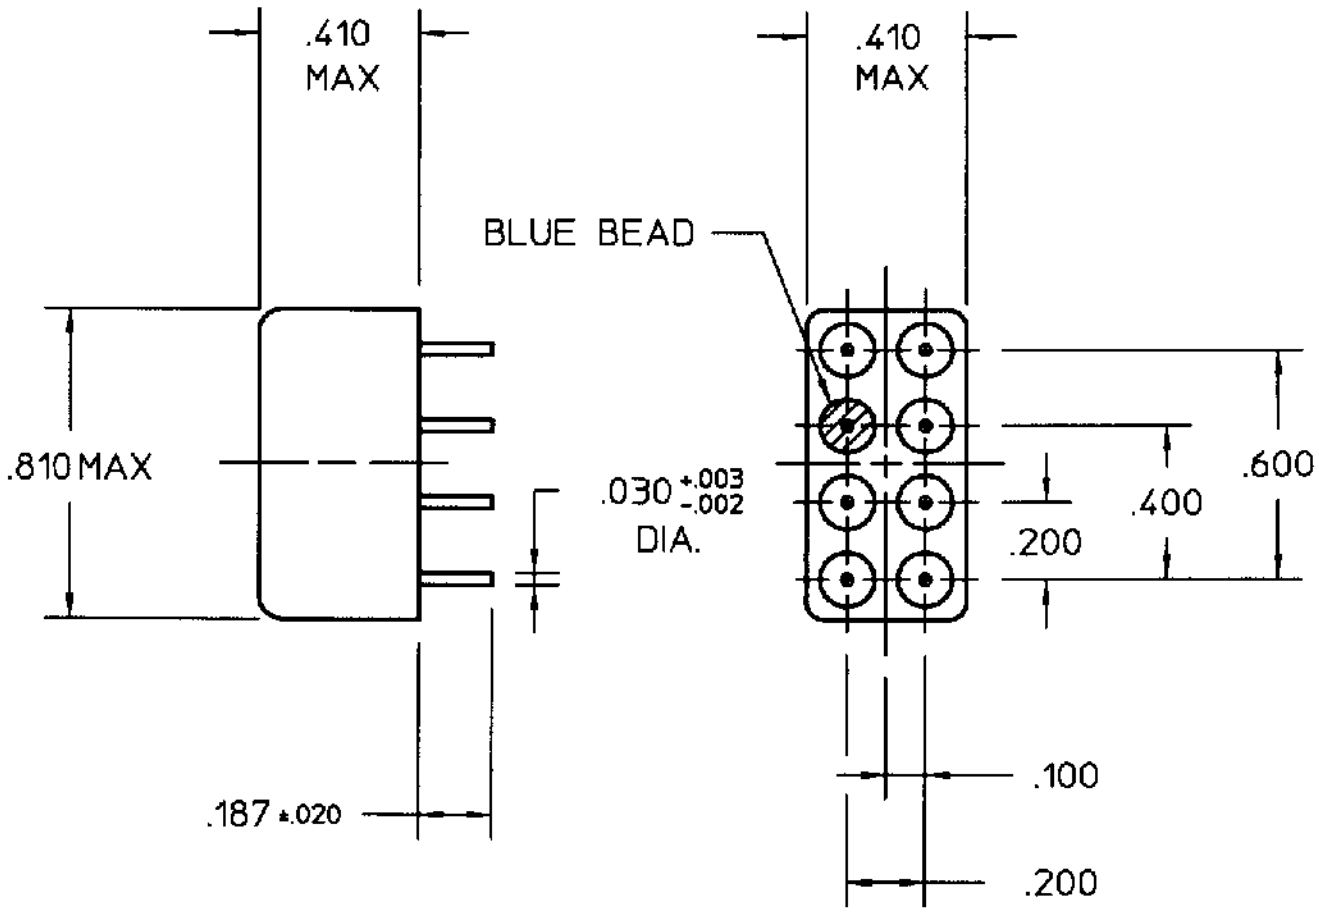



REV. 0
DCO 14972

COIL: @ +25 °C
RESISTANCE 520 OHMS ± 10%
NOMINAL VOLTAGE 18.0 VDC
MUST OPERATE 9.5 VDC
MUST RELEASE 0.95 VDC

ENVIRONMENT:
VIBRATION 10 CPS TO 2000 CPS @ 20 g's
SHOCK 100 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

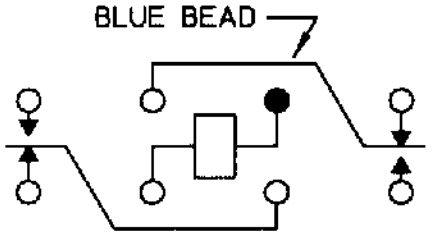

CONTACT RATING: LOW LEVEL TO 4A
28 VDC RESISTIVE 100,000
OPERATIONS MIN.

DR. R.B. 12/7/98 | CK. MR 12/7/98

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I. STD.
CUST. NO.

TYPE HFW4A RELAY

HFW4A1201J00

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-962915-1 2380312-2 2834055-1 3631B101LL ROX05SJ18R U5254-000005-030PA 1-794222-0
1393431-1 2005330-1 RH73H2A40MKTN SMW73R0JT 141991-2 917696-1 936348-1 CPF0402B37K4E1
TE50BR39J 2310537-1 SBCHE154R7K SBCHE64R7K 1903112-2 3430B2F51RTDF CRGCQ2010J3K3
1743455-2 2377783-2 MPT100C18RF 175977-2 1969656-1 2-292161-3 650075-000 3-1393225-0